



WAVE | K-10674-RF

Touchless toilet 1.6 gpf flushometer retrofit

Features

- Fixture-mount design
- Includes 1.5V AA batteries
- Retrofit models require a control stop and vacuum breaker



DISCONTINUED



Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

CSA B64
CSA B125.3
ASSE 1037/ASME A112.1037/CSA B125.37
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651
OBC

Pressure/Fixture Supply Requirements

Minimum Flowing Pressure: 25 psi (172.4 kPa)
Minimum Flow Rate: 25 gpm (94.6 l/min)

Material

- Brass

Recommended Products/Accessories

K-23723 Faucet cleaner

Technology

- Electronic infrared sensor with WAVE technology for accurate activation
- Slow-closing piston technology


Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 00:00 - US-CA

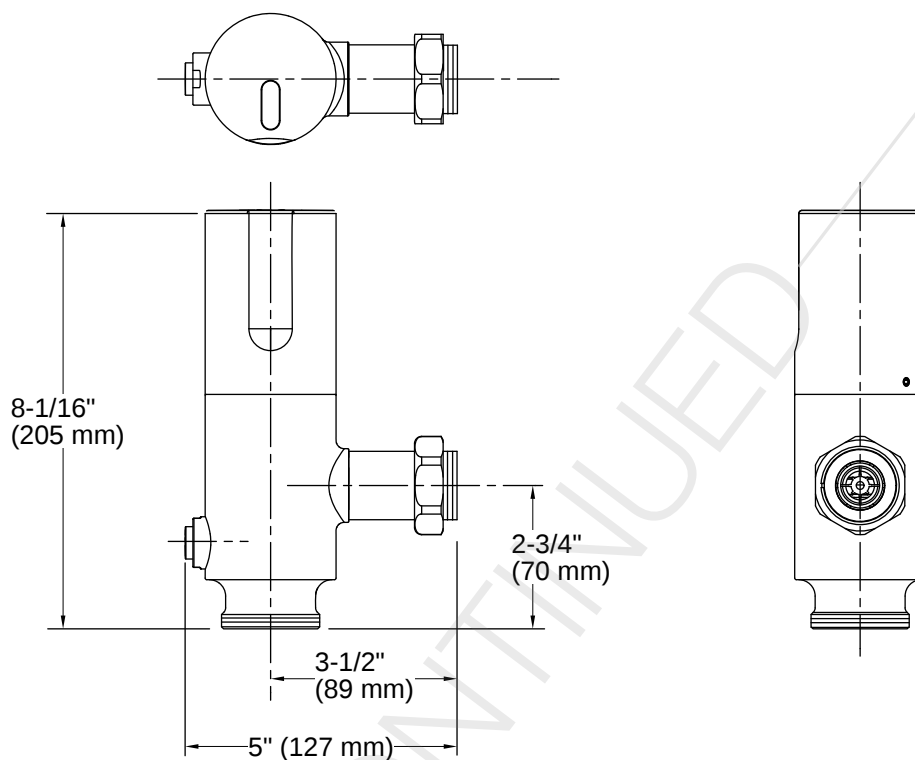

Installation

- Intended for toilet installations with 1-1/2" (38 mm) spud coupling connection

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

