


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

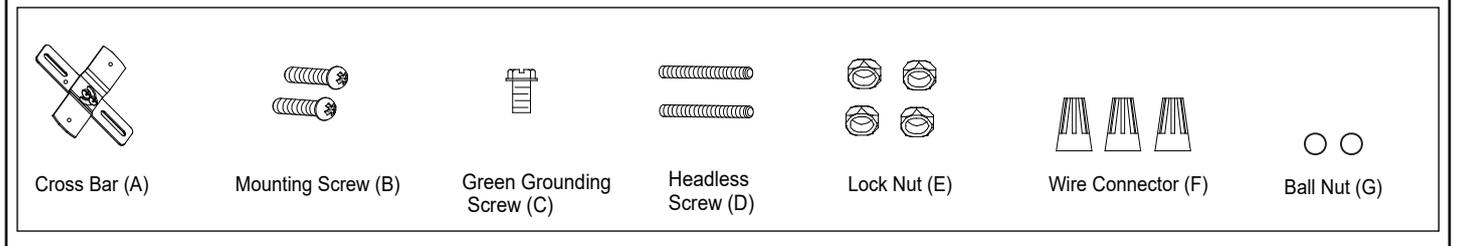


Installation Steps

Turn off the power at fuse or circuit box

1. Tighten the rod to the swivel.
2. Attach the two headless screws to the cross bar, and screw in 2 to 3 turns.
3. Attach the cross bar to the outlet box by using two mounting screws.
4. Pull out the source wires from the outlet box. Make wire connections as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (green insulation or bare wire) to the cross bar with the green grounding screw, and then connect it to house grounding wire with the wire connector.Carefully put the wires back into the outlet box.

5. Attach the canopy to the cross bar by inserting two headless screws, and then secure it with ball nuts.

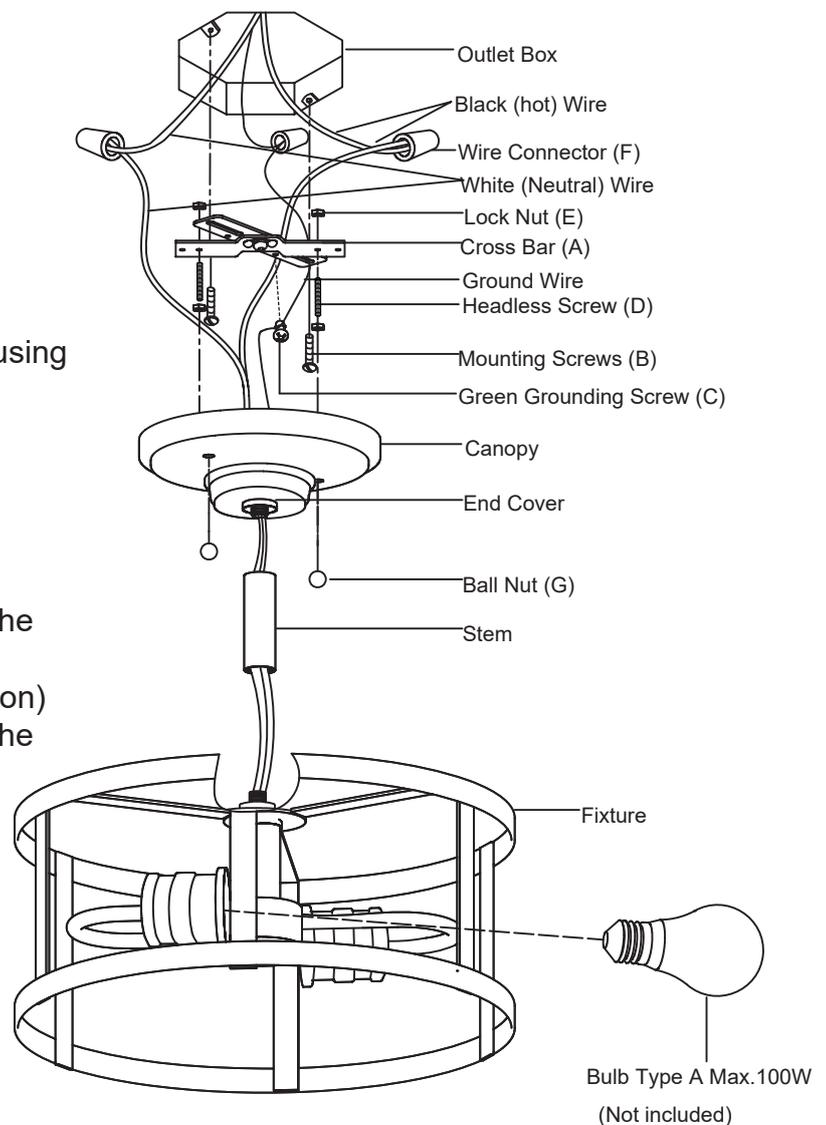

6. Put the fixture in the canopy, tighten with headless screws and then secure it with two ball nuts.


7. Install 1X100W Max medium base bulb (not included).

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

							→ Assembly Kit (1SET)
Cross Bar (A)	Mounting Screw (B)	Green Grounding Screw (C)	Headless Screw (D)	Lock Nut (E)	Wire Connector (F)	Ball Nut (G)	

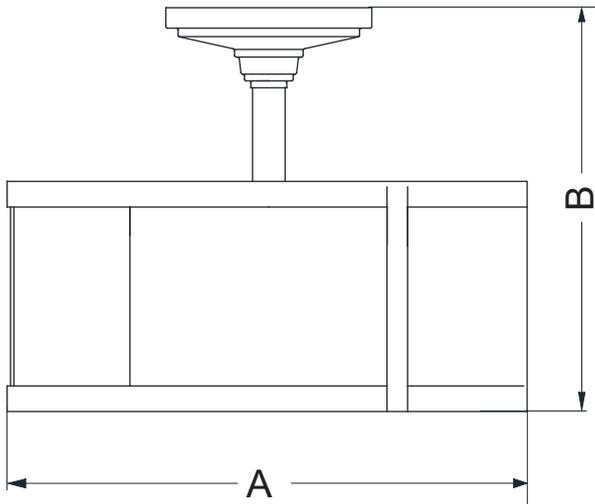

A: 12"

B: 9-1/2"