


Features

- Acrylic
- Integral apron with removable access panel
- Blower motor with 300 W heater, and electronic user control
- Blower motor is supplied with a grounding-type plug-in cord
- Left or right drain
- 120 BubbleMassage™ airjets
- Integral tile flange
- Slotted overflow for maximum bathing depth
- Low threshold height
- Integral lumbar support
- Armrests
- 60" (1524 mm) x 32" (813 mm) x 19" (483 mm)

5' BUBBLEMASSAGE™ BATH WITH AIRJETS

K-1122-GRA

ALSO K-1122-GLA

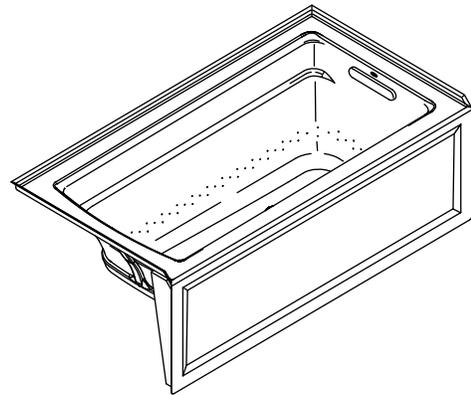

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- IAPMO IGC 171
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-1122-GLA	Integral apron, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1122-GRA	Integral apron, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
Recommended Accessories			
K-1446	Remote blower installation kit		NA

Product Specification

The acrylic bath with airjets shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 19" (483 mm) in height. Bath shall have an integral apron and removable access panel. Bath shall have a blower motor with 300 W heater, and an electronic user control. The blower motor shall have a grounding-type plug-in cord. Bath shall have left or right drain. Bath shall have 120 BubbleMassage airjets. Bath shall have an integral tile flange. Bath shall have slotted overflow for maximum bathing depth, low threshold height, and integral lumbar support. Bath shall have armrests. The bath with airjets shall be Kohler Model K-1122-_____-_____.

ARCHER™

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	45-1/8" (1146 mm) x 19-11/16" (500 mm)			
Basin area, top	52-3/4" (1340 mm) x 25-5/16" (643 mm)			
Weight	100 lbs (45.4 kg)			
To overflow:				
Water depth	15" (381 mm)			
Capacity	58 gal (219.5 L)			
* Approximate measurements for comparison only.				
Blower motor:	Heater	V	Hz	A
	300 W	120	60	5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Blower motor:	120 V, 15 A, 60 Hz
Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.	


Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 46 lbs/square foot (223 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

No change in measurements if connected with drain illustrated. (K-7271 or K-7272)

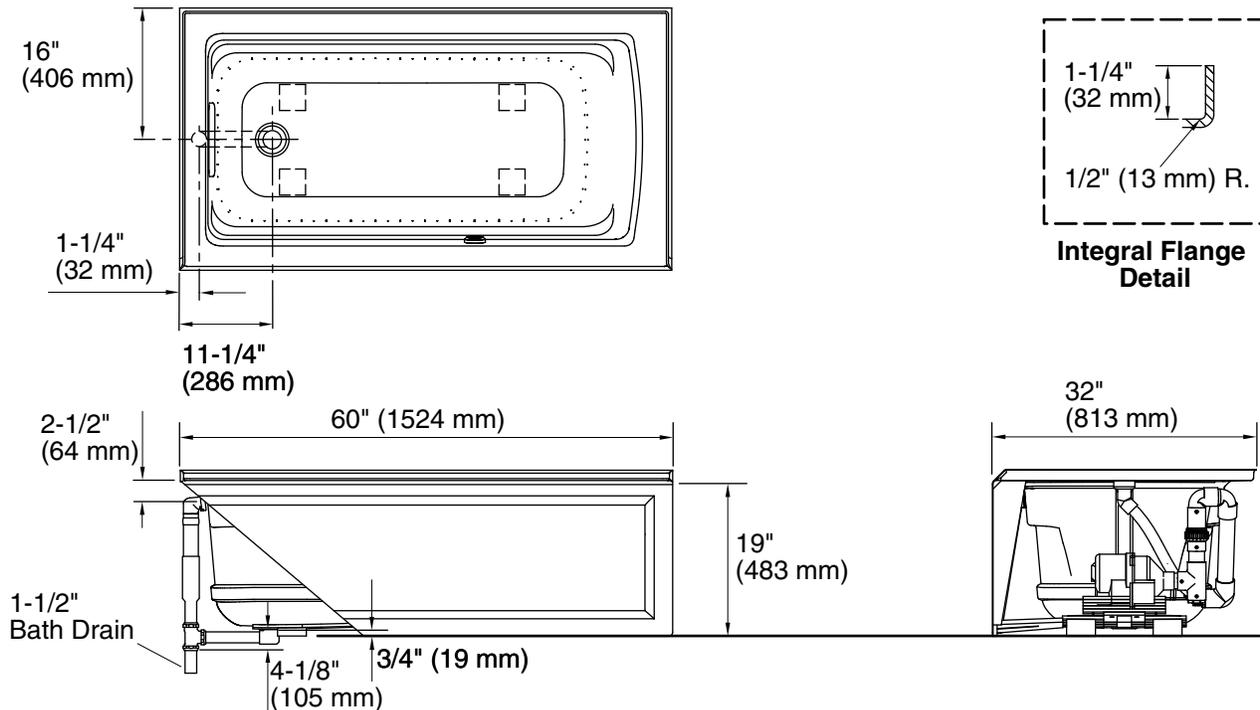

Product Diagram