



Composed® | K-73078-4

Deck-mount bath faucet with handshower

Features

- Metal construction
- Single-function handshower with 60" (1524 mm) length hose
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- High-temperature limit setting for added safety
- 8.0 gpm (30.3 lpm) maximum bath faucet flow rate at 45 psi (3.1 bar)
- Coordinates with Composed faucets, accessories, and showering components to complete your bathroom



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:23 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 8-1/4" (210 mm)

Flow Rate

Faucet Flow Rate: 8 gpm (30.3 l/min)

Handshower Rated Maximum Flow: 1.75 gpm (6.6 l/min)

Valves

Included Valves: Thermostatic, Volume Control

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories


K-23723 Faucet cleaner
K-73146 Double robe hook
K-73144 24" double towel bar
K-73141 18" towel bar
K-73142 24" towel bar
K-73145 Towel arm
K-73147 Pivoting toilet paper holder
K-73148 Vertical toilet paper holder

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



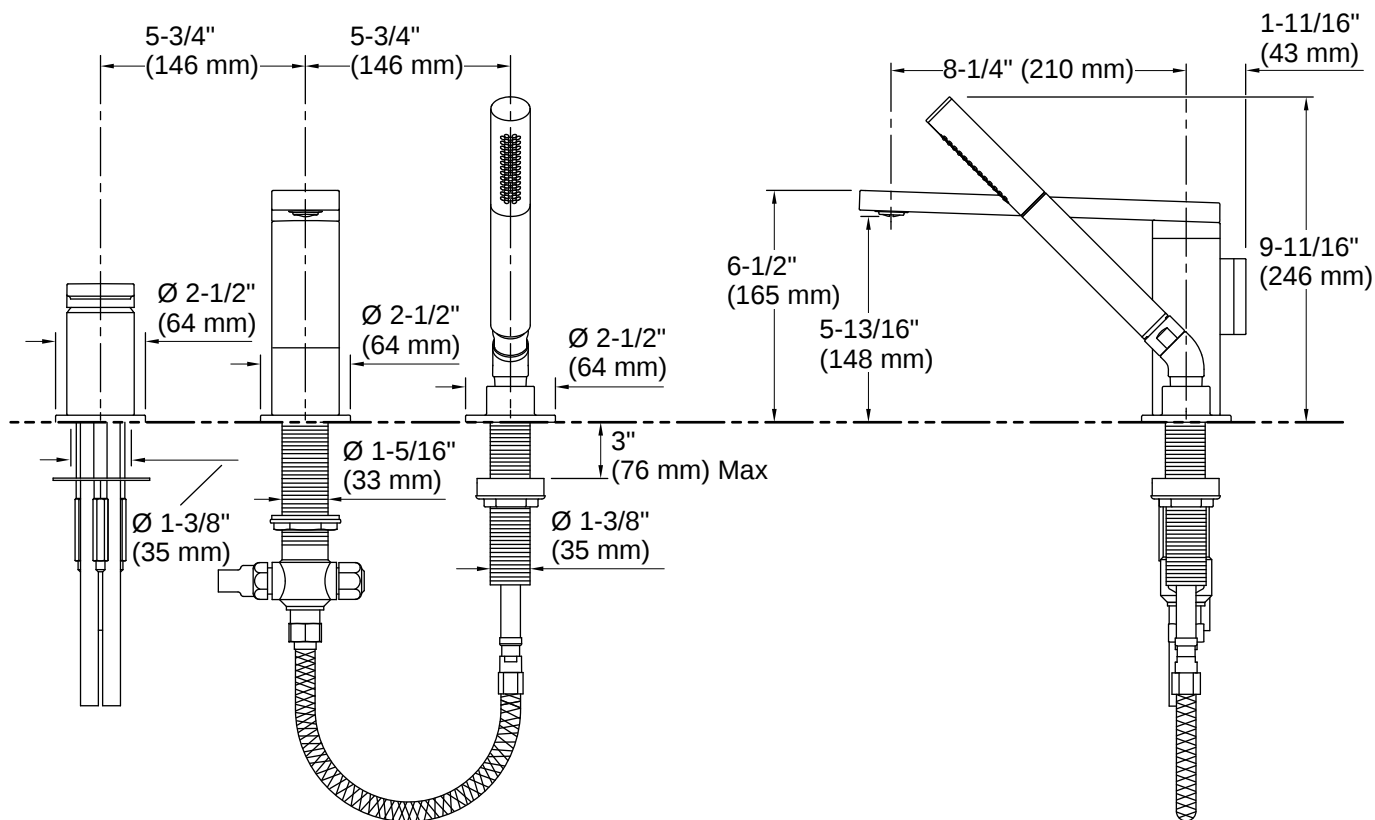

Installation

- Deck- or bath-mount

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.31 gal/min (5 l/min) or less.

