## **KOHLER**. Faucets

# Forté® Rite-Temp® Shower Valve Trim K-TS10276-4A

### **Features**

- Includes face plate with handle, shower arm with flange and showerhead.
- Single lever handle controls both on/off activation and temperature setting.
- Coordinates with Forte faucets and accessories to complete your bathroom.
- Includes single function 2.5 gpm (9.5 l/min) showerhead.
- Showerhead features MasterClean™ sprayface for easy cleaning.
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3 degrees Fahrenheit during water pressure fluctuations.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

Trim set requires valve to complete installation.

### **Required Products/Accessories**

K-304/K-P304 Series Rite-Temp® Valves

or

K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves

٠.

K-304/K-P304 Series Rite-Temp® Valves

K-304/K-P304 Series Rite-Temp® Valves

r

K-304/K-P304 Series Rite-Temp® Valves

or K-304/K-P304 Series Rite-Temp® Valves

-

K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves





### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

# **KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	СР	Polished Chrome
	G	Brushed Chrome
	BN	Vibrant® Brushed Nickel







### K-TS10276-4A

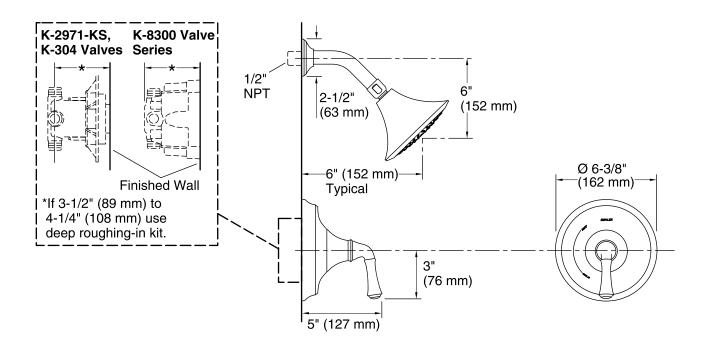

### **Technical Information**

All product dimensions are nominal.

### Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)
Pressure: 80 psi (5.5 bar)

### **Notes**

Install the product according to the installation guide.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout. Elbow must be a 90 degree drop ell that is secured to rigid framing.

