

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Duralock™ quick connect installation
- High arc spout provides the height and reach to fill or clean large pots
- Flexible supply lines with 3/8" compression fittings
- 360° rotating spout
- Faucet designed for handle to be mounted on right side
- Faucet can be installed with or without sidespray

## OPERATION

- Single handle lever
- Temperature controlled by 100° arc of handle travel

## FLOW

- Spout flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

## CARTRIDGE


- 1255™ Duralast™ cartridge for Single-Handle Faucets

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

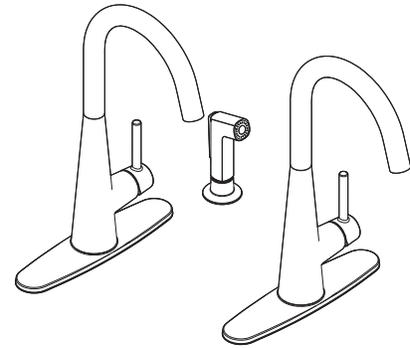


## SLEEK™

### Single Handle Single Hole Mount High Arc Kitchen Faucet

**Models:** 7870 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 2, 3, OR 4 HOLES. 1-1/2" (38mm) MIN. DIA. FOR VALVE AND 1-1/4" (32mm) MIN. DIA. HOLE FOR SIDE SPRAY.

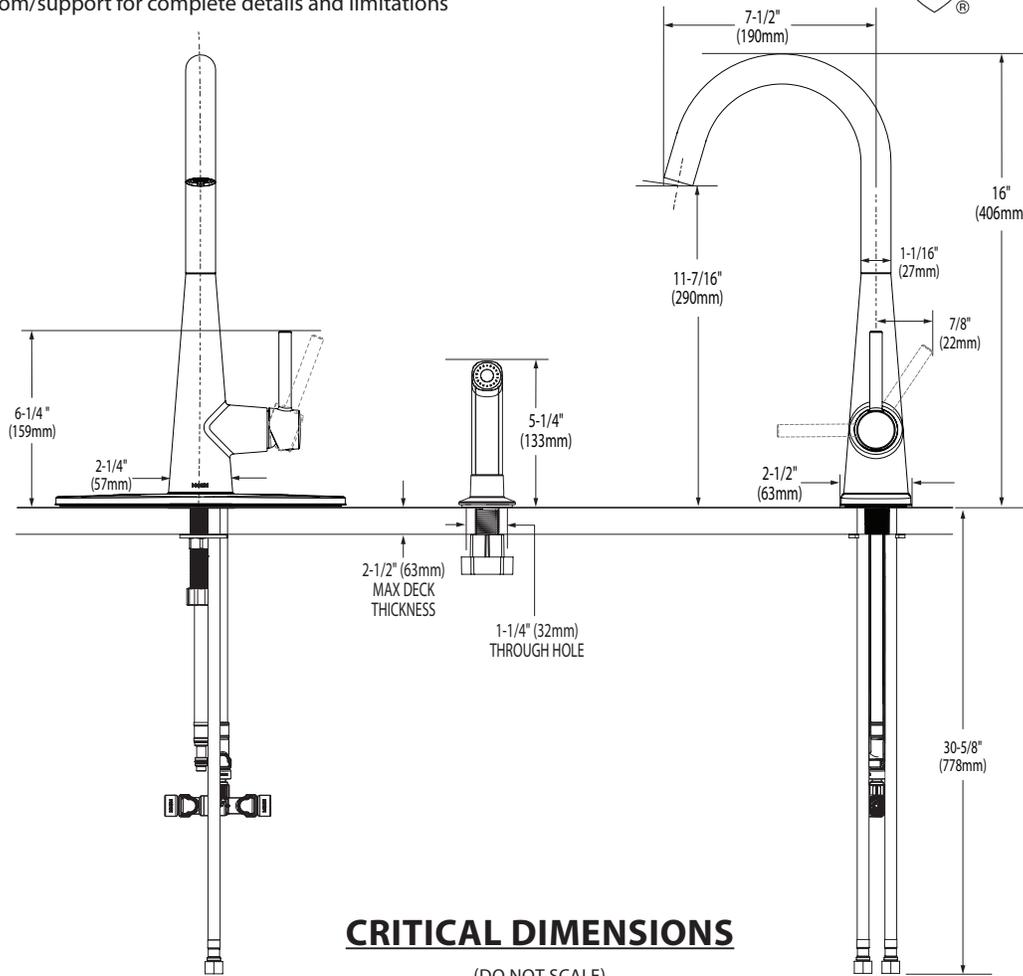

## CRITICAL DIMENSIONS

(DO NOT SCALE)

**TO ORDER PARTS CALL: 1-800-BUY-MOEN**

**[www.moen.com](http://www.moen.com)**