




91119 Product Installation Instructions

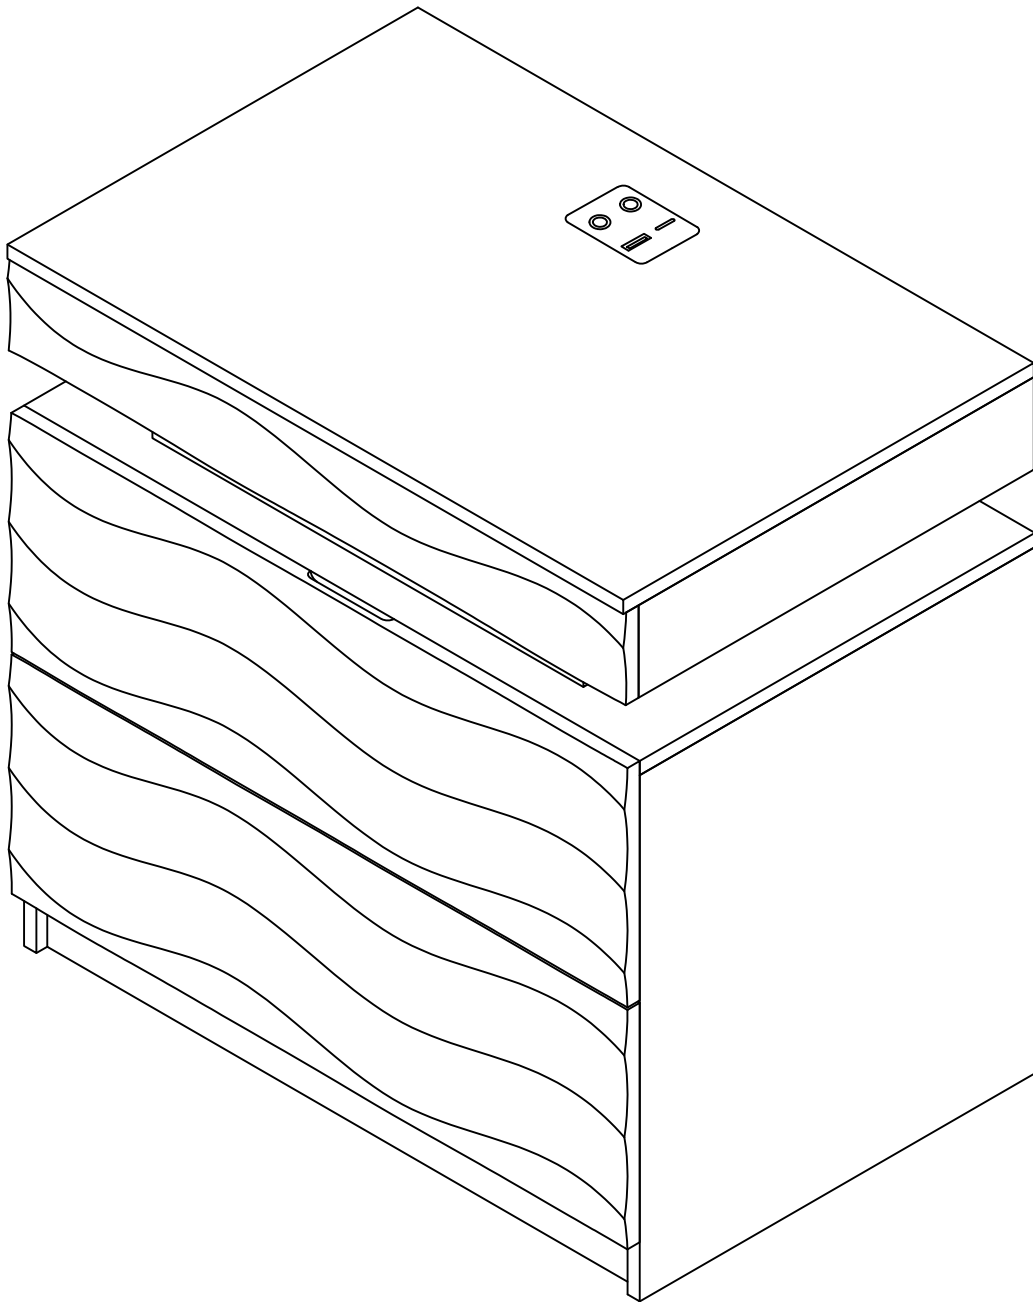





1x2




2x4




3x2




4x1




5x1




6x1




7x2




8x1




9x1




10x1




11x1




12x1




13x1




14x1




15x1




16x1




17x1




18x2









19x1




20x1




Accessories list

A		Two In One Screw (6x28mm)	62pcs +4pcs
B		Two In One Nut (10x12mm)	62pcs +4pcs
C		Wood Chipping (6x30mm)	22pcs +2pcs
D		Screw & Guide (12 inch) (3x12mm)	6pcs 36pcs +6pcs
E		Back plate buckle & Screw (3x16mm)	4pcs +1pcs
F		Locks & tools & key	1pcs
G		Non-slip pads	8pcs +1pcs
		AC/DC Adapter(12V 2.0A)	1pcs







1pcs

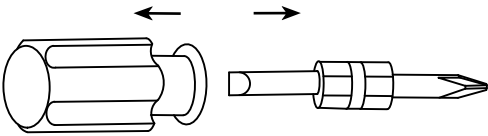


Double-head screwdriver, use as required

91119 Product Installation Instructions

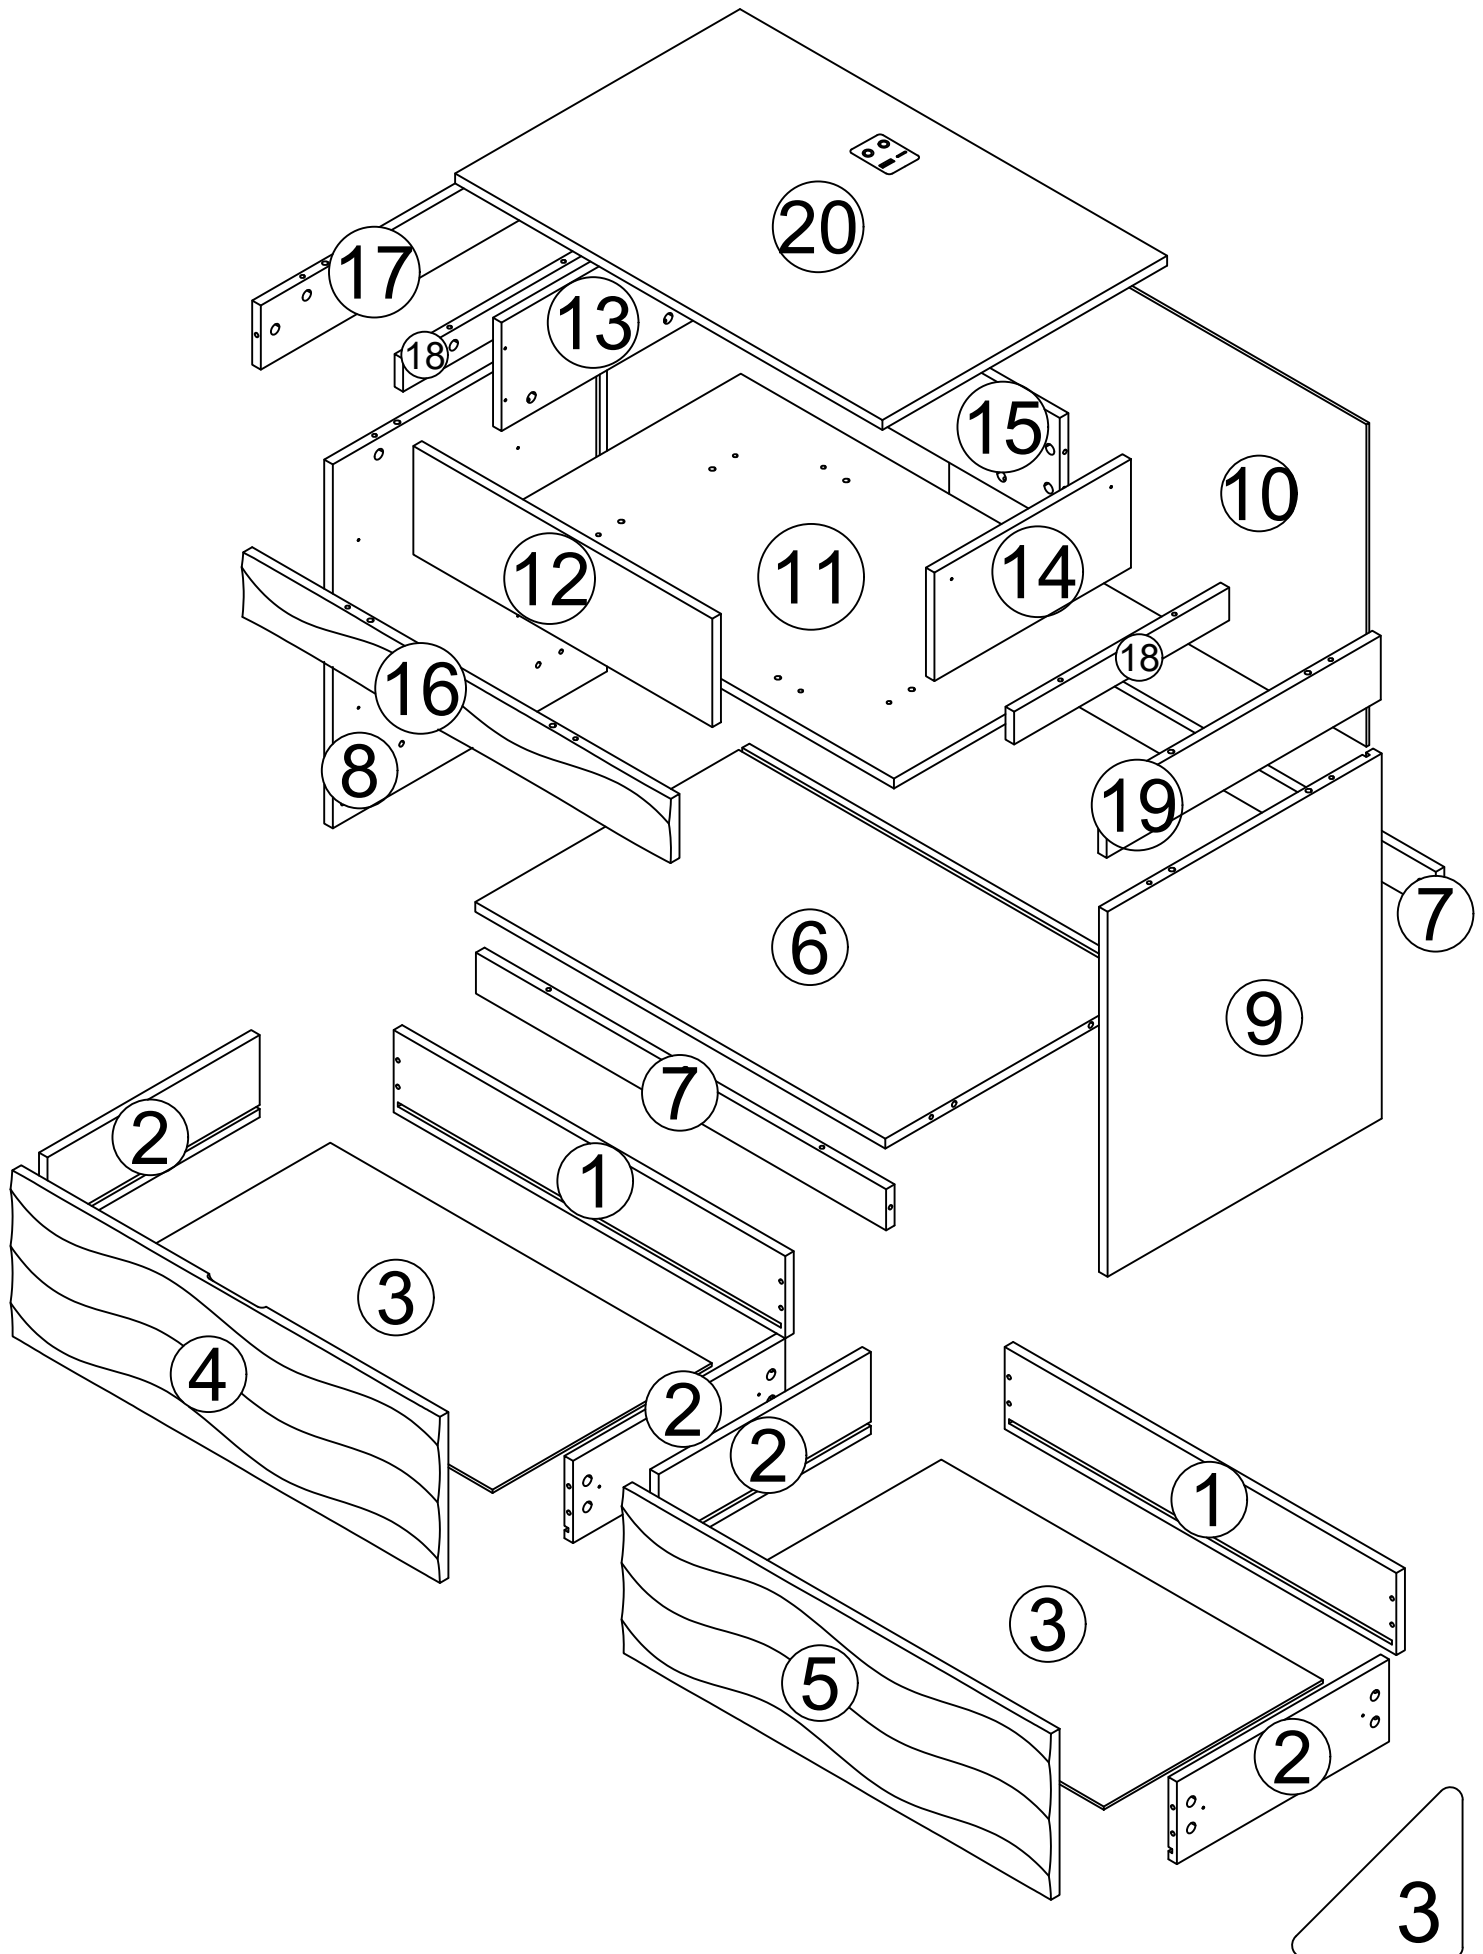


A		16pcs	D	 	4pcs 12pcs
B		16pcs			

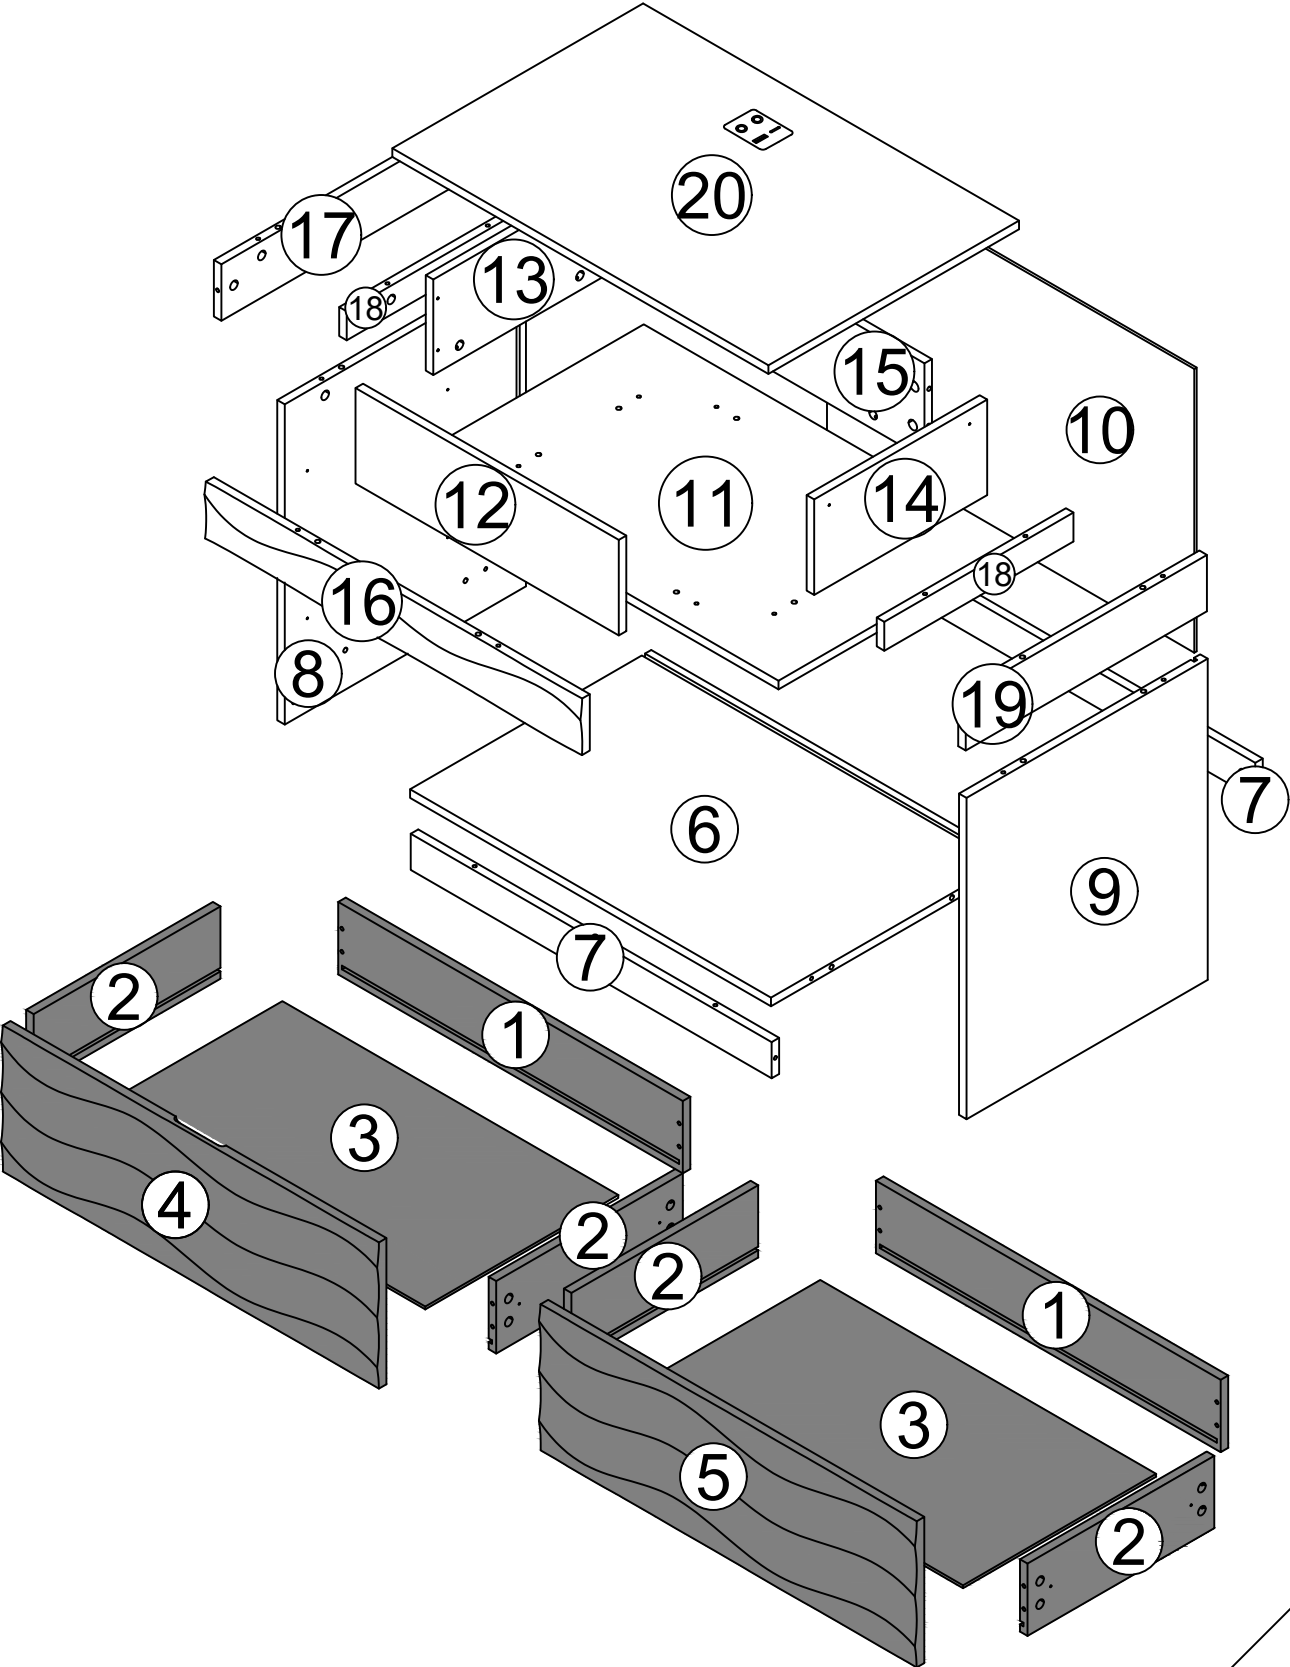


Use parts ① and ②



Step1

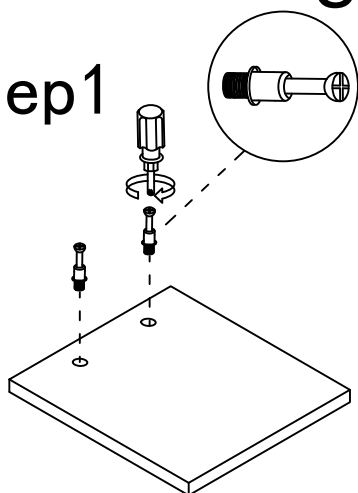


Step2

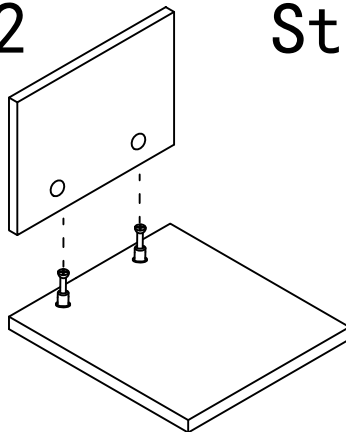

Step3

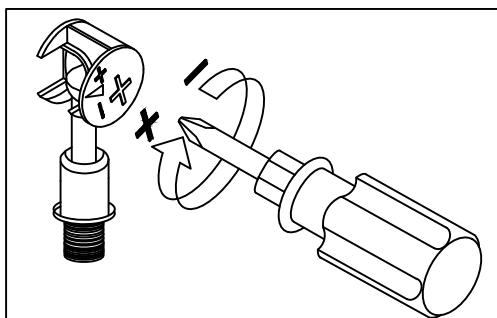
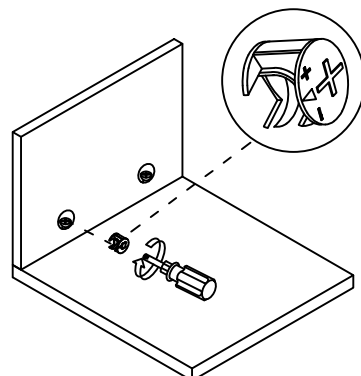


Use a screwdriver to lock in the direction of the "+" sign

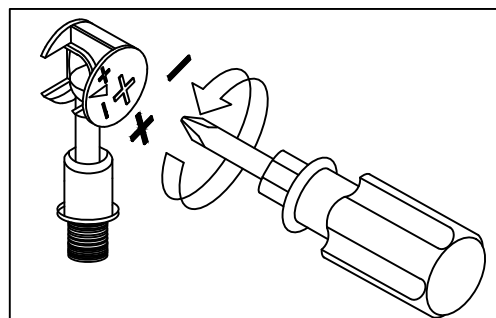


Disassemble along the direction of "-" sign

Step 1

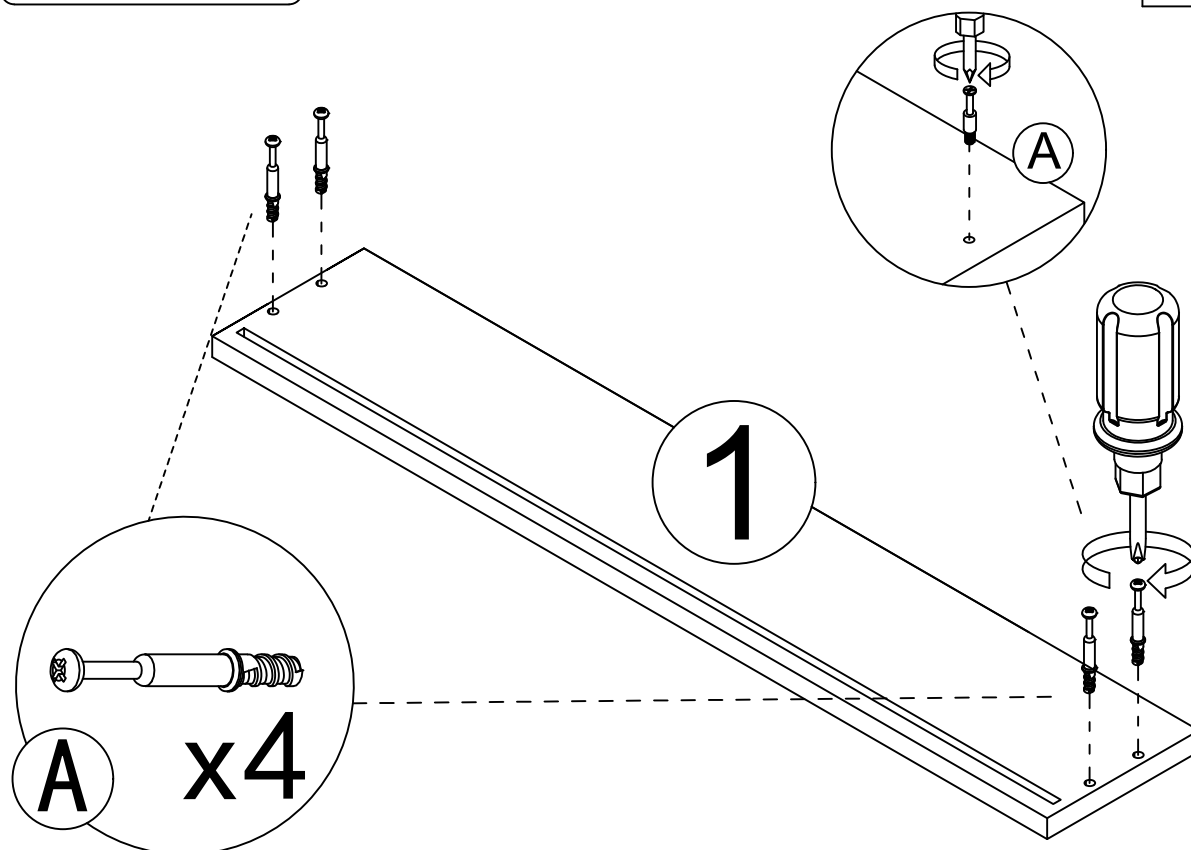


5


Step 2

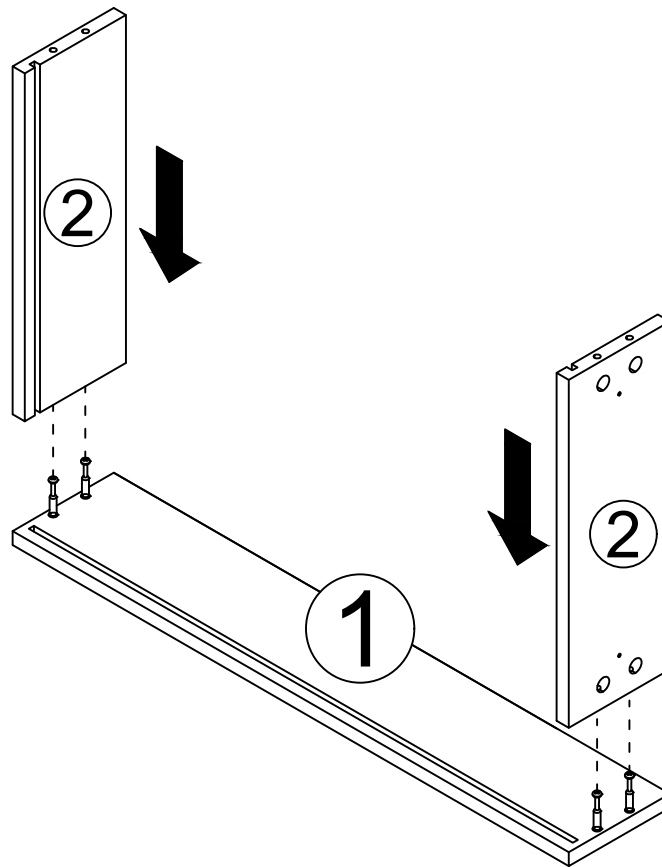


Step 3

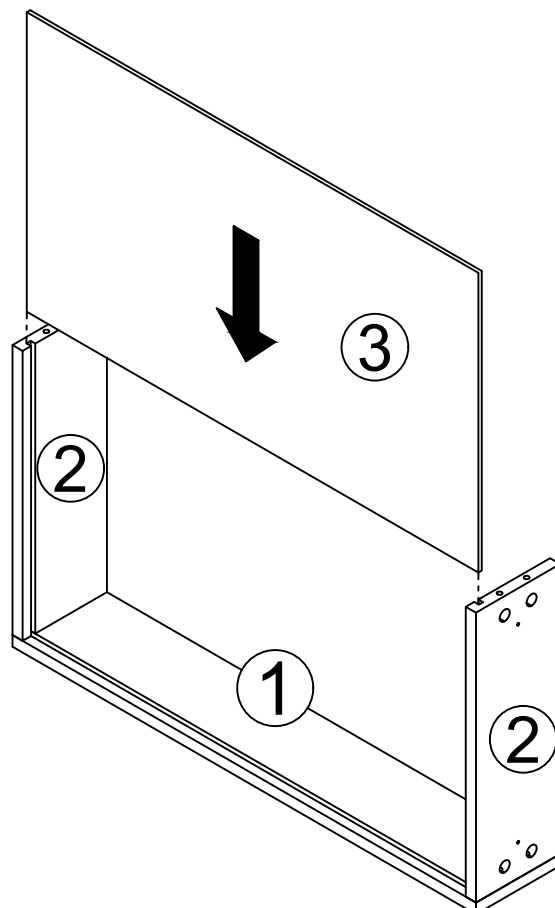


Step 4

A  x4

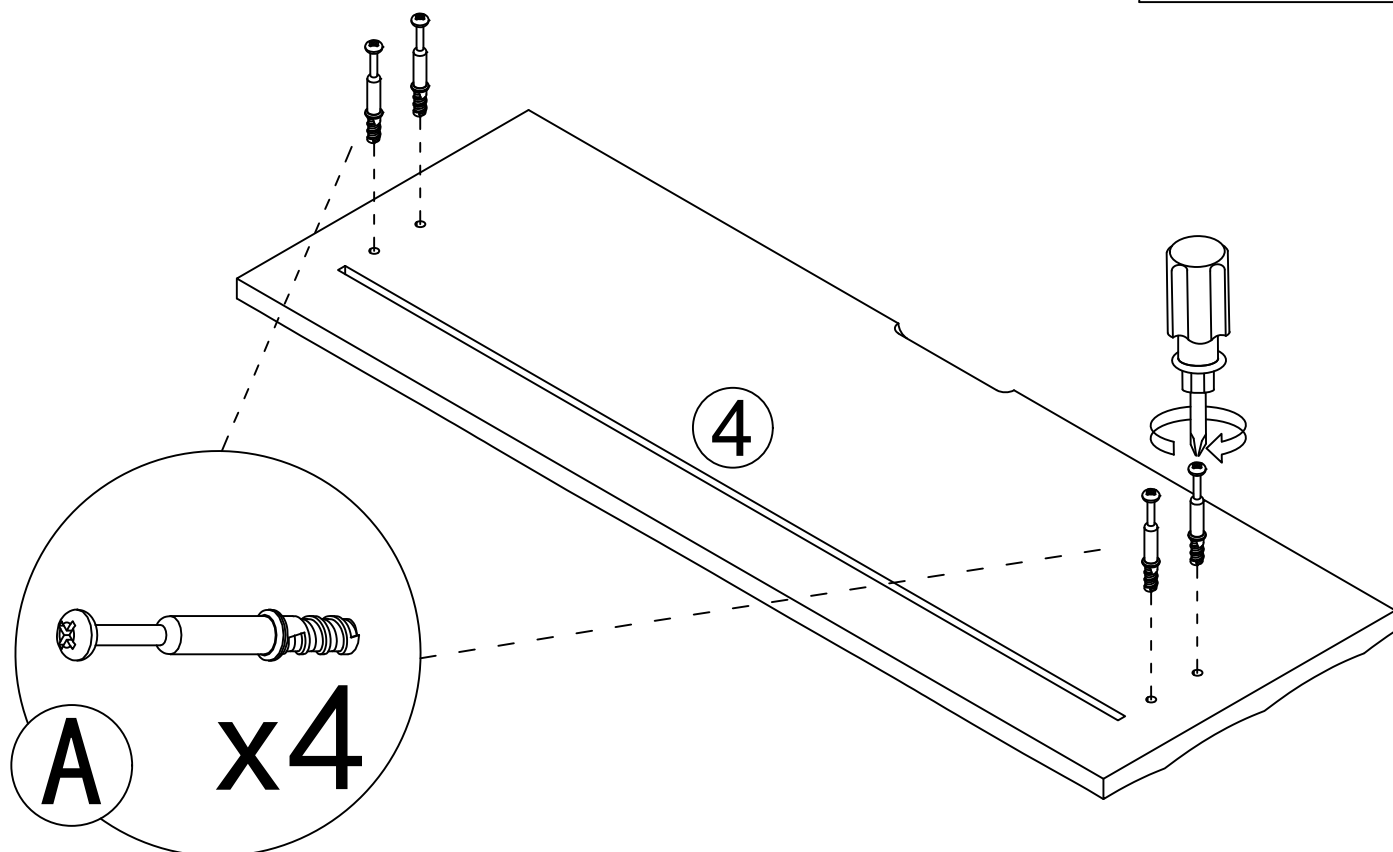


Step 5

B  x8


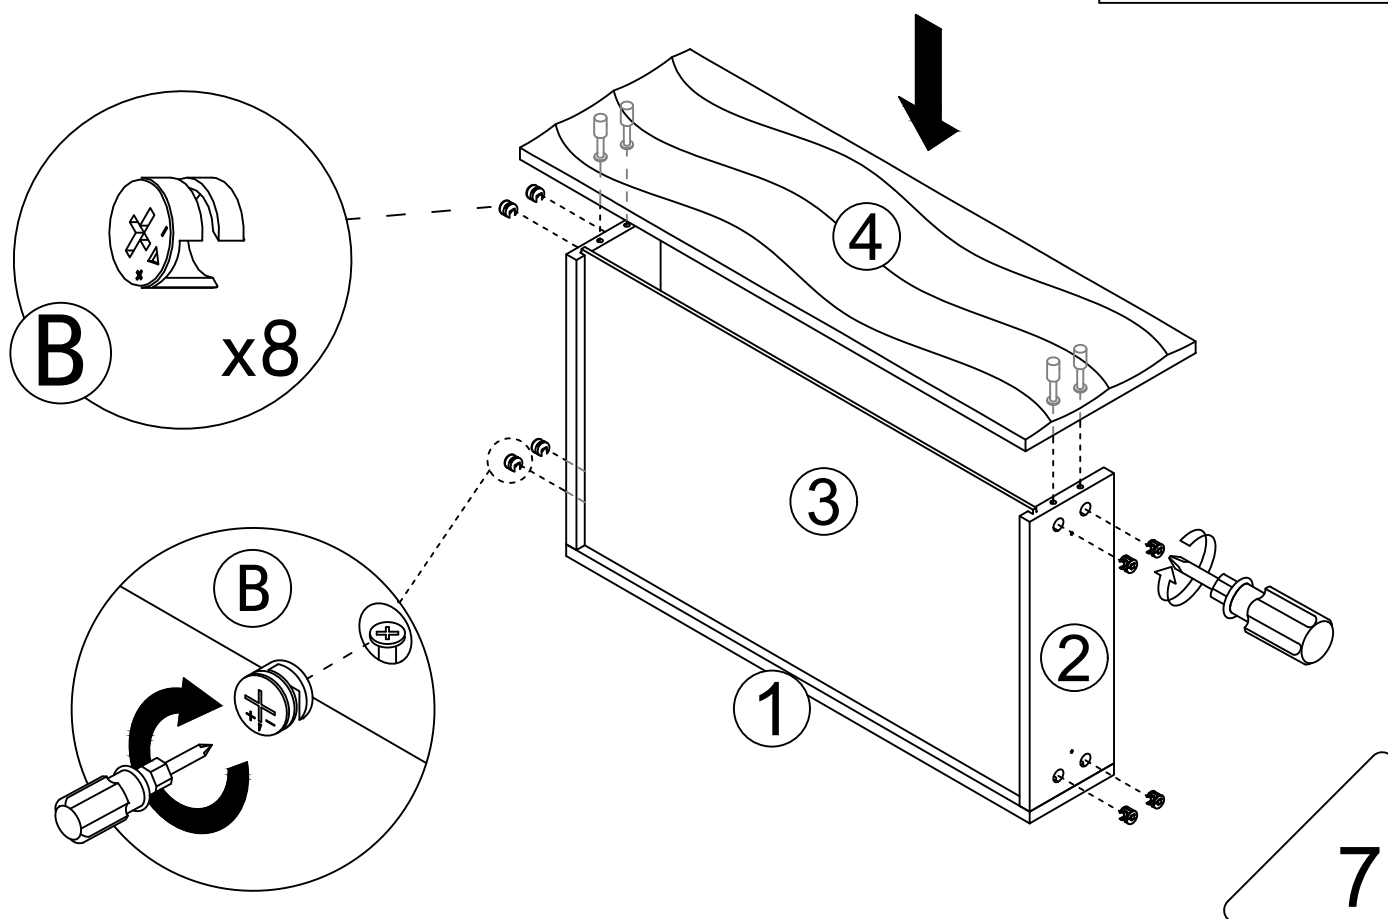


Drawer rail breakdown diagram

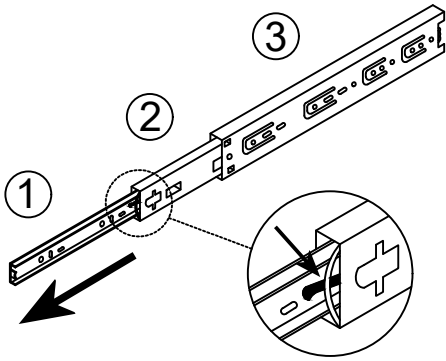


Step 1 : Pull the rails apart

Step 2 : Push the nylon buckle outward ①

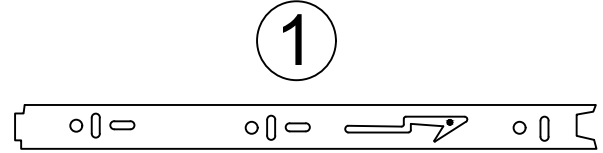

②

③

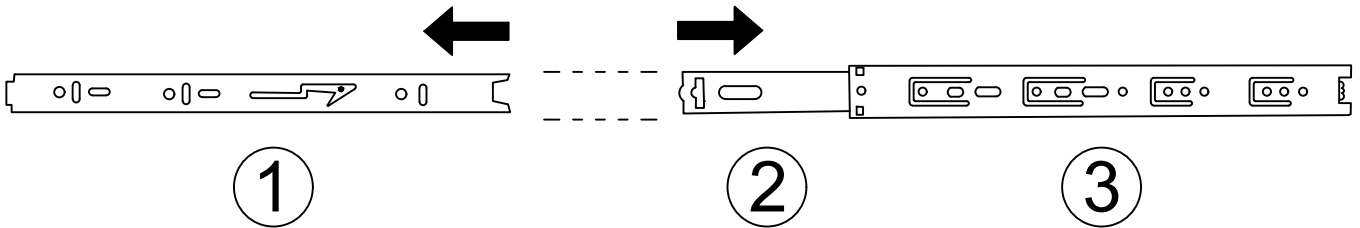


①


②

③

Step 6

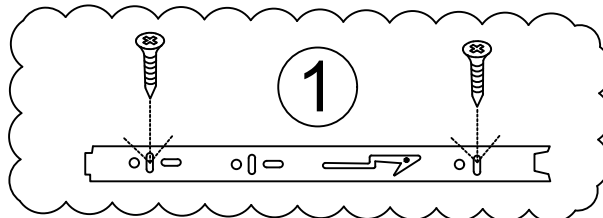


①



x2

x4

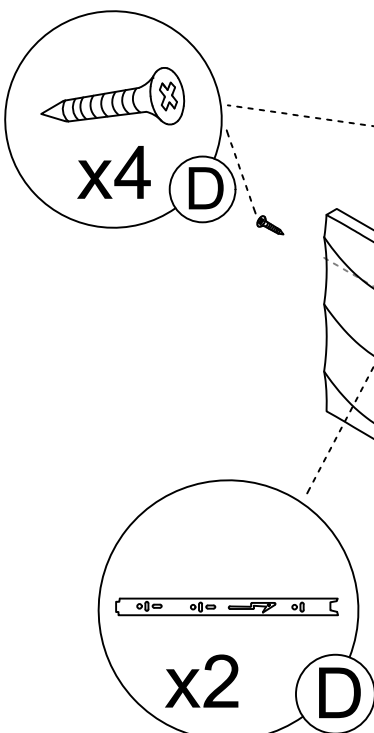


x4

D

x2

D

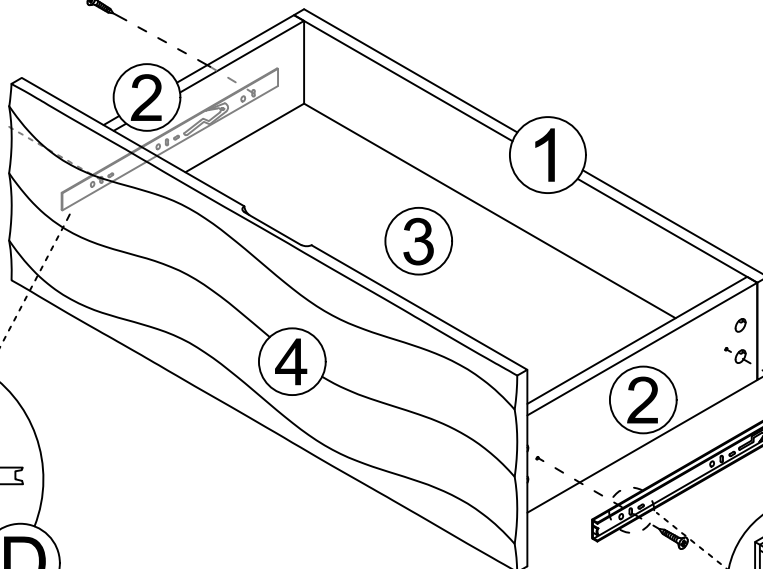



②

①

③


④

②






8




Step 7

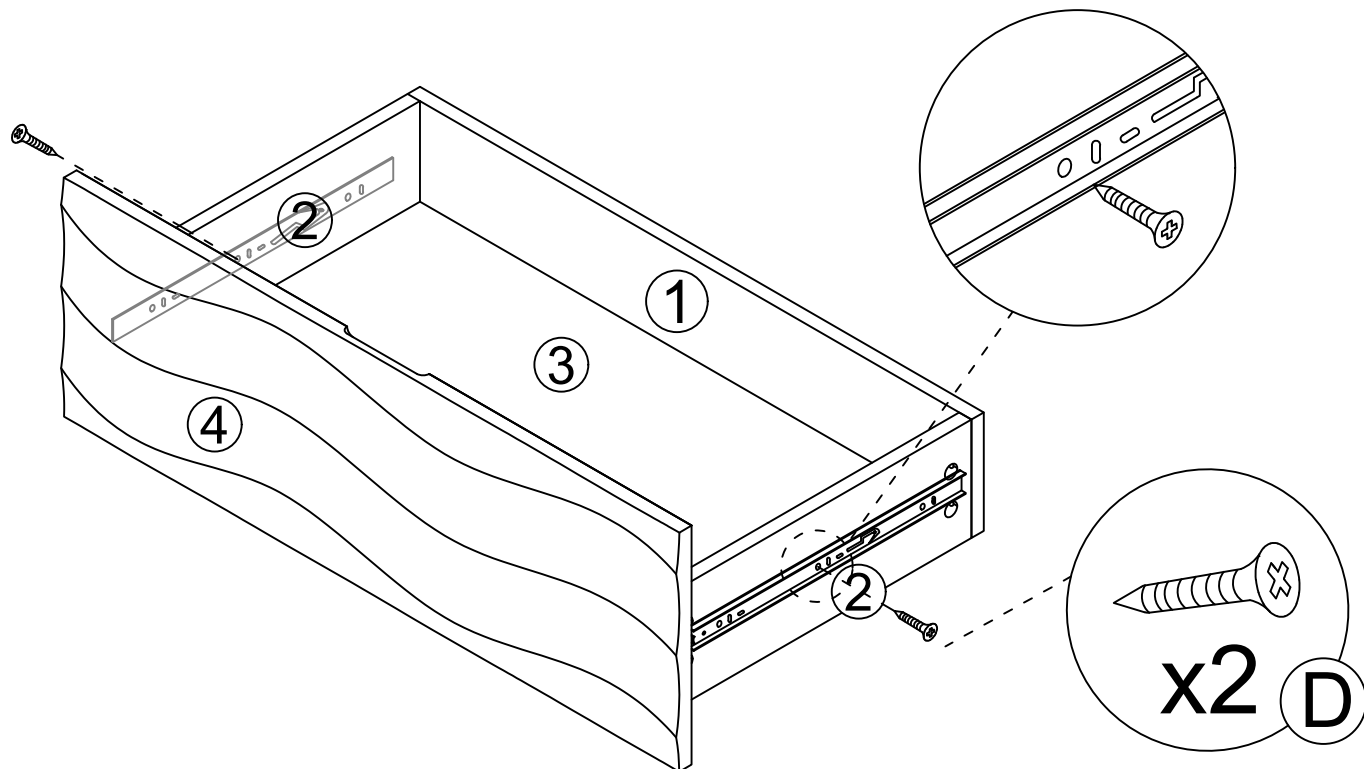


This hole is for strengthening fixed hole customers can choose to install according to their needs.

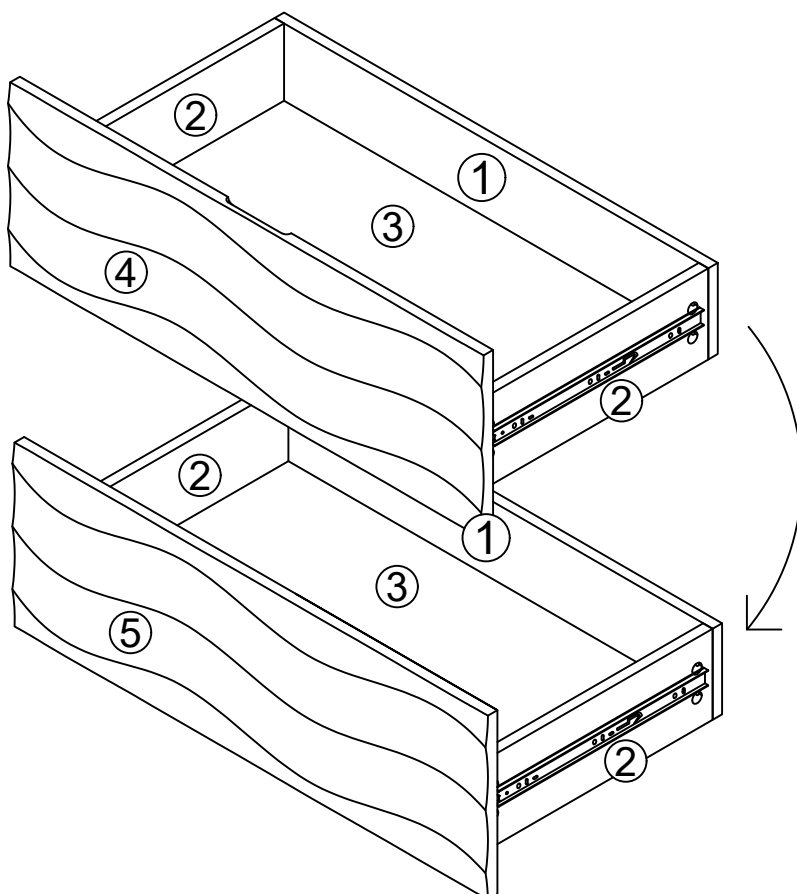



The installation method for the other drawer is the same

A		34pcs	C		16pcs
B		34pcs	D	 	6pcs 18pcs
G		8pcs			

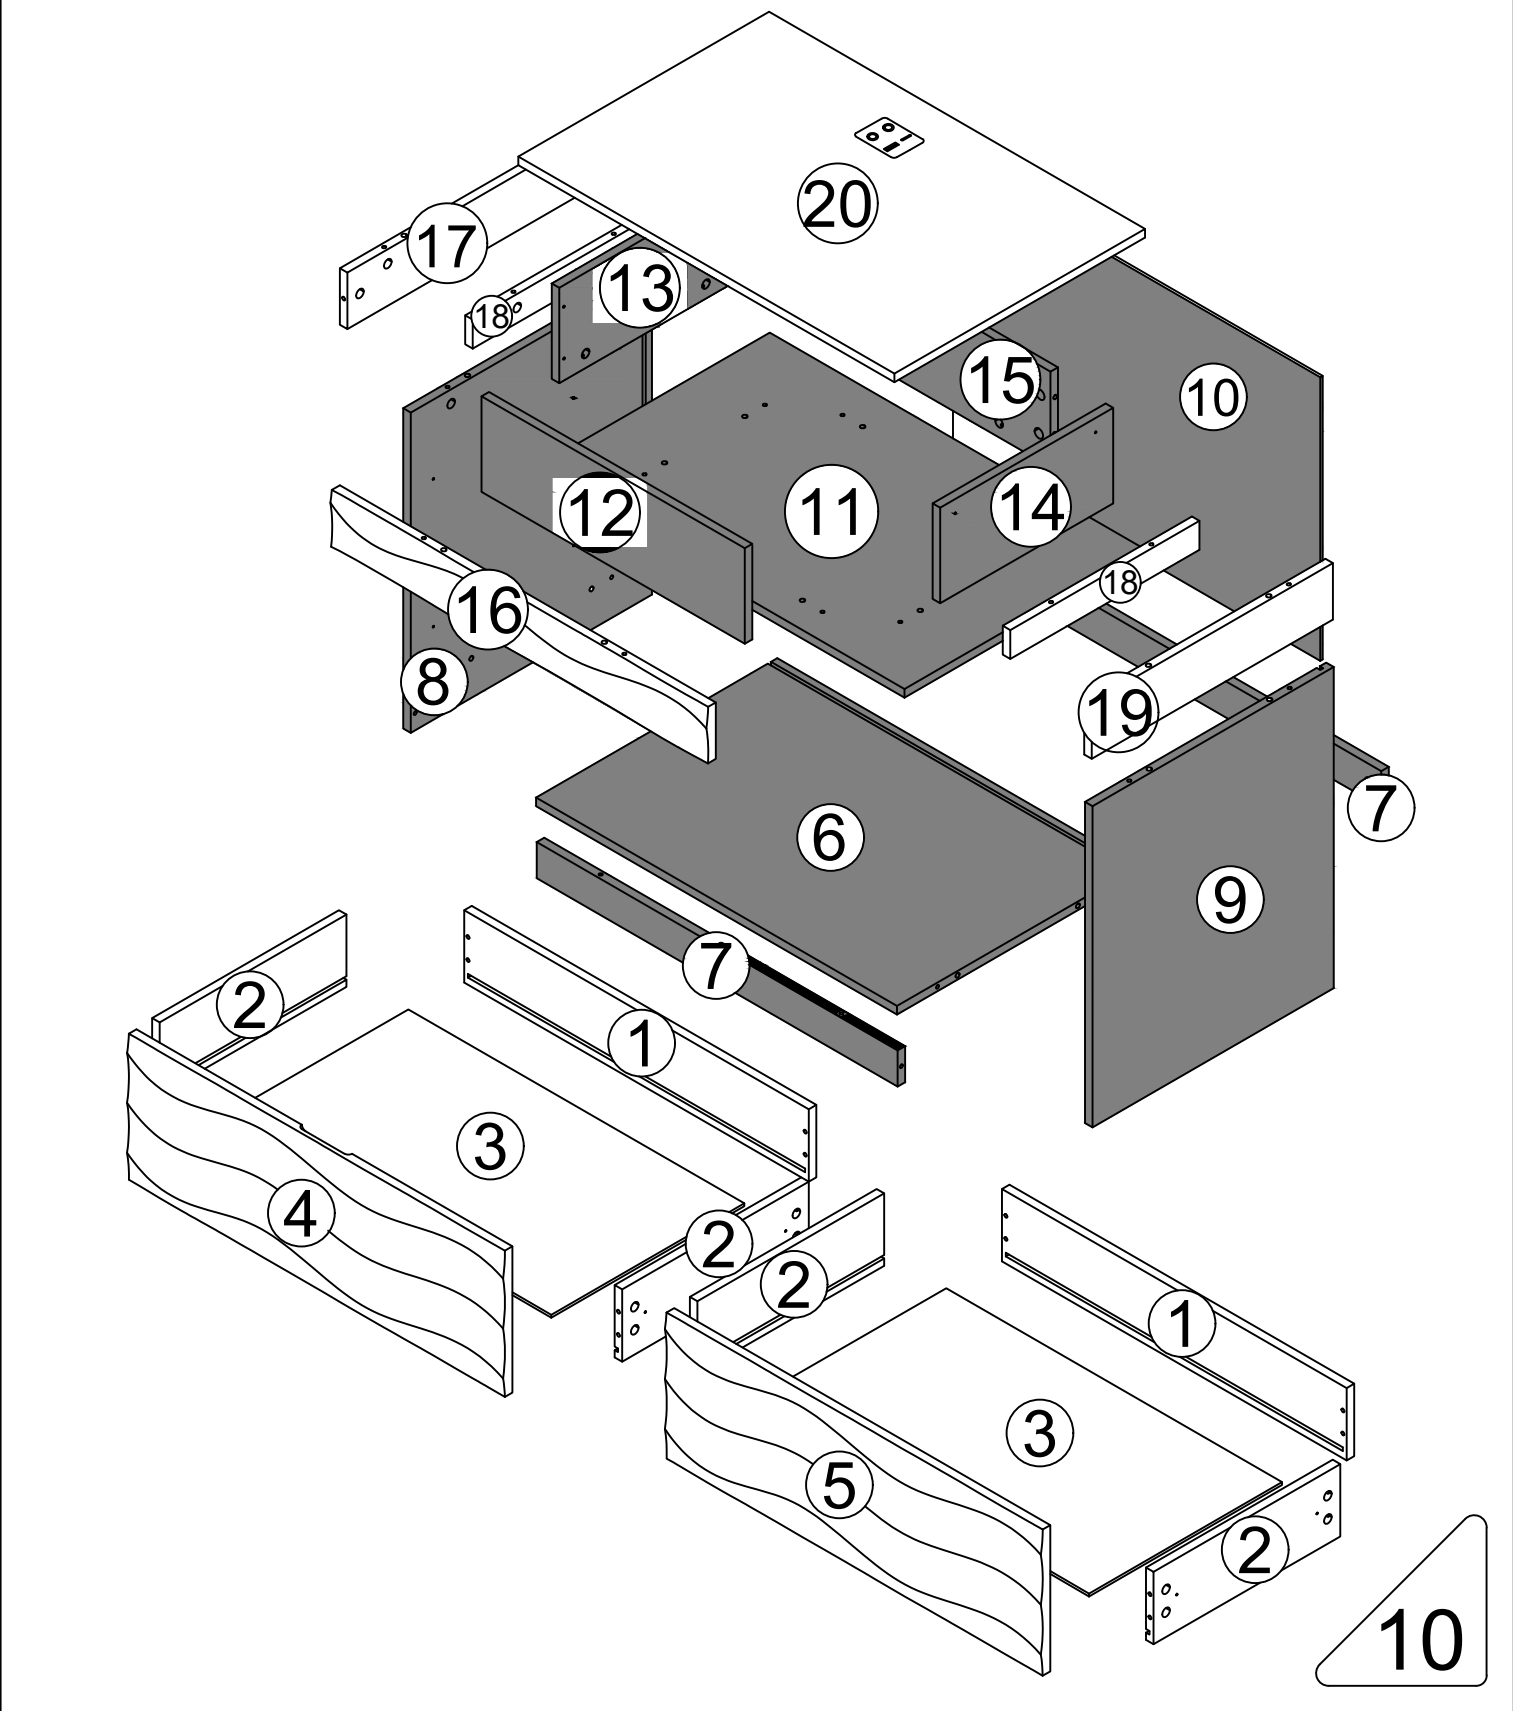


Step 8

(A)  x6

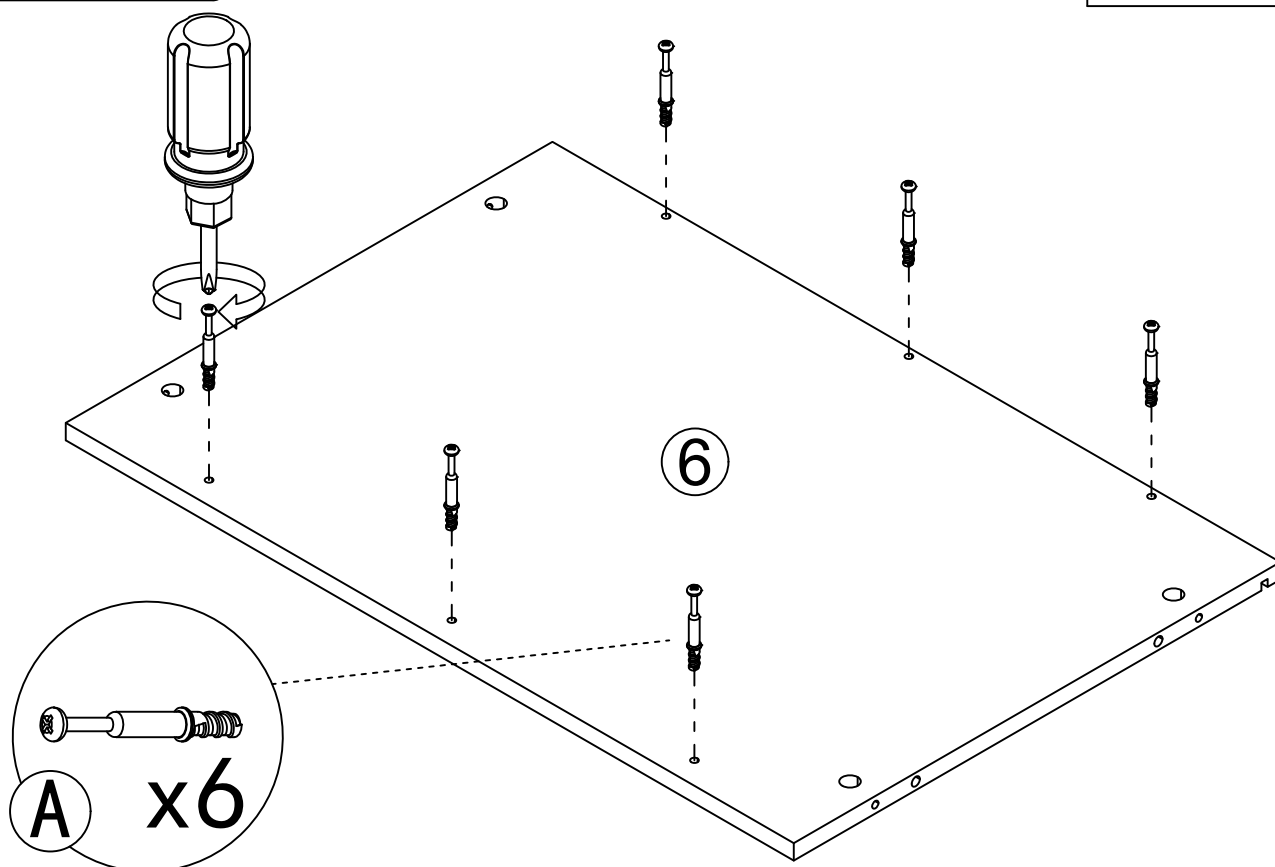


Step 9


(B)  x6

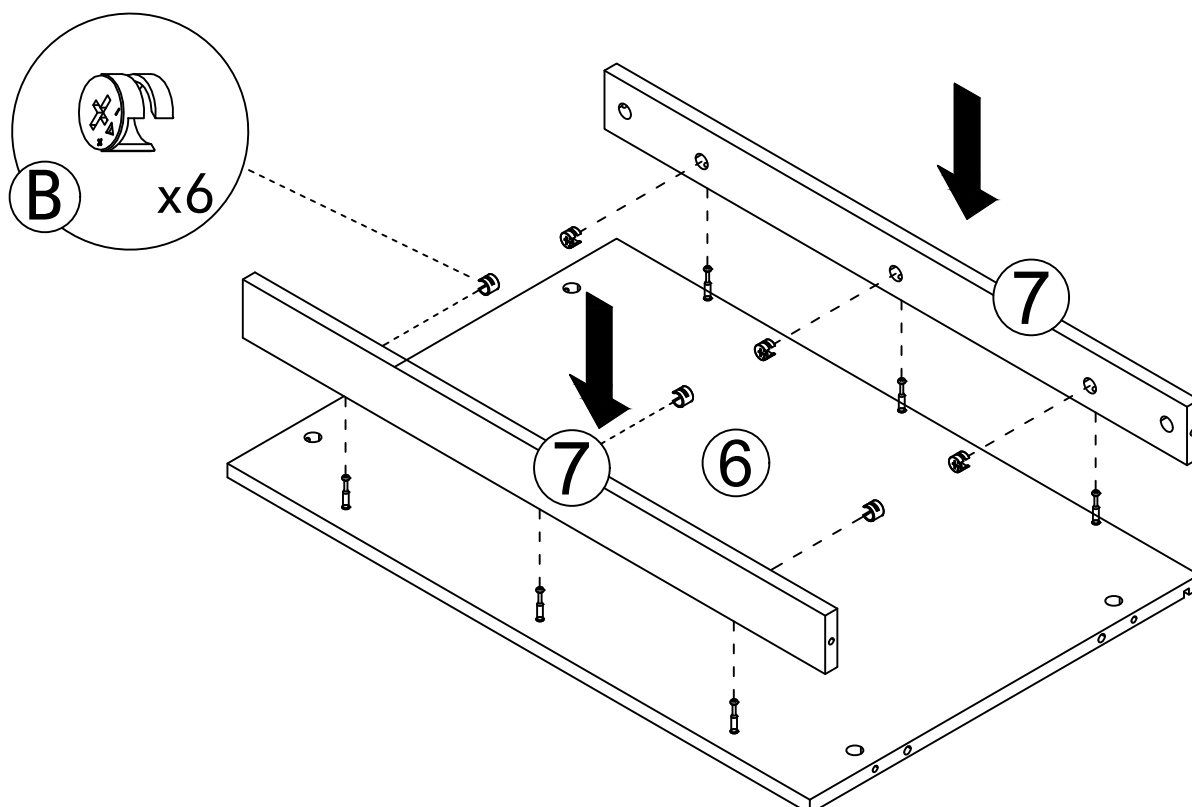




Step 10

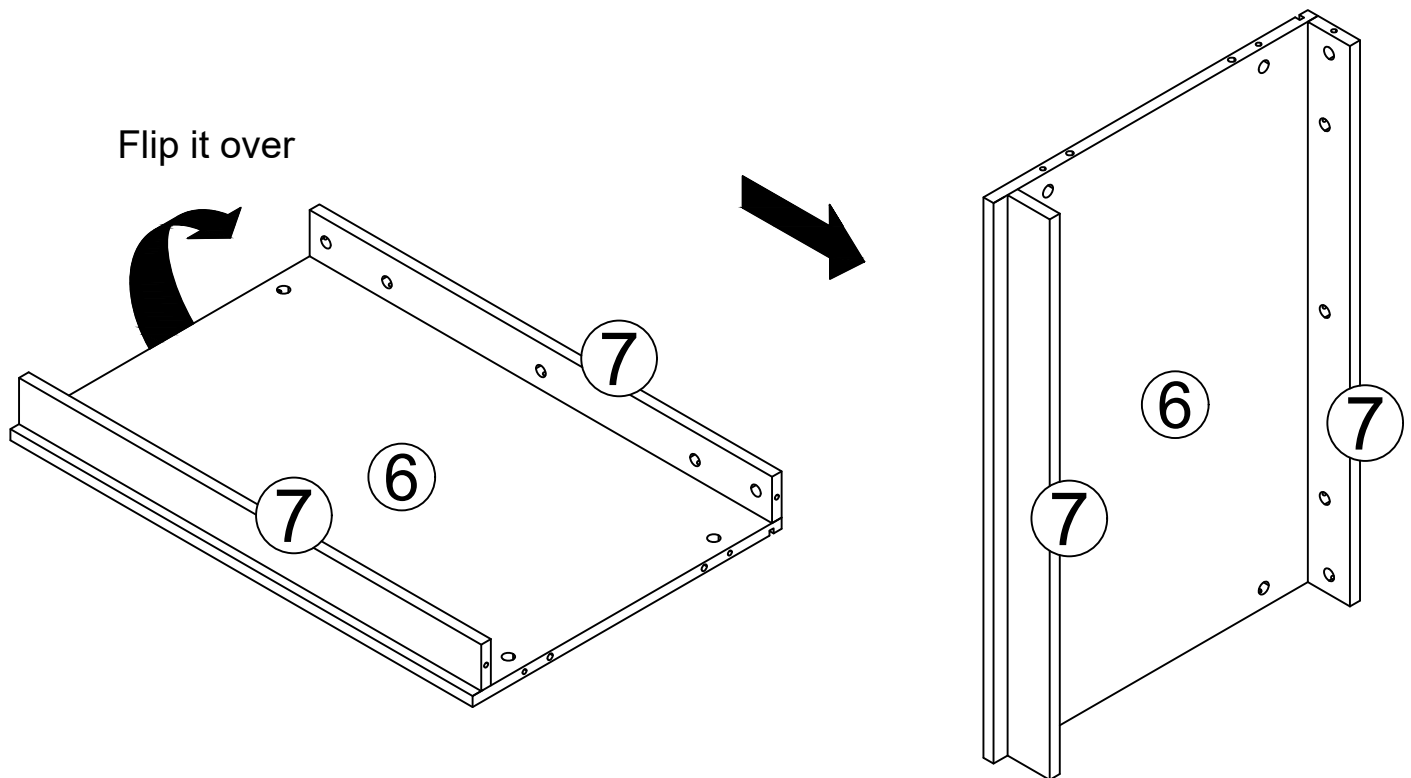



Step 11

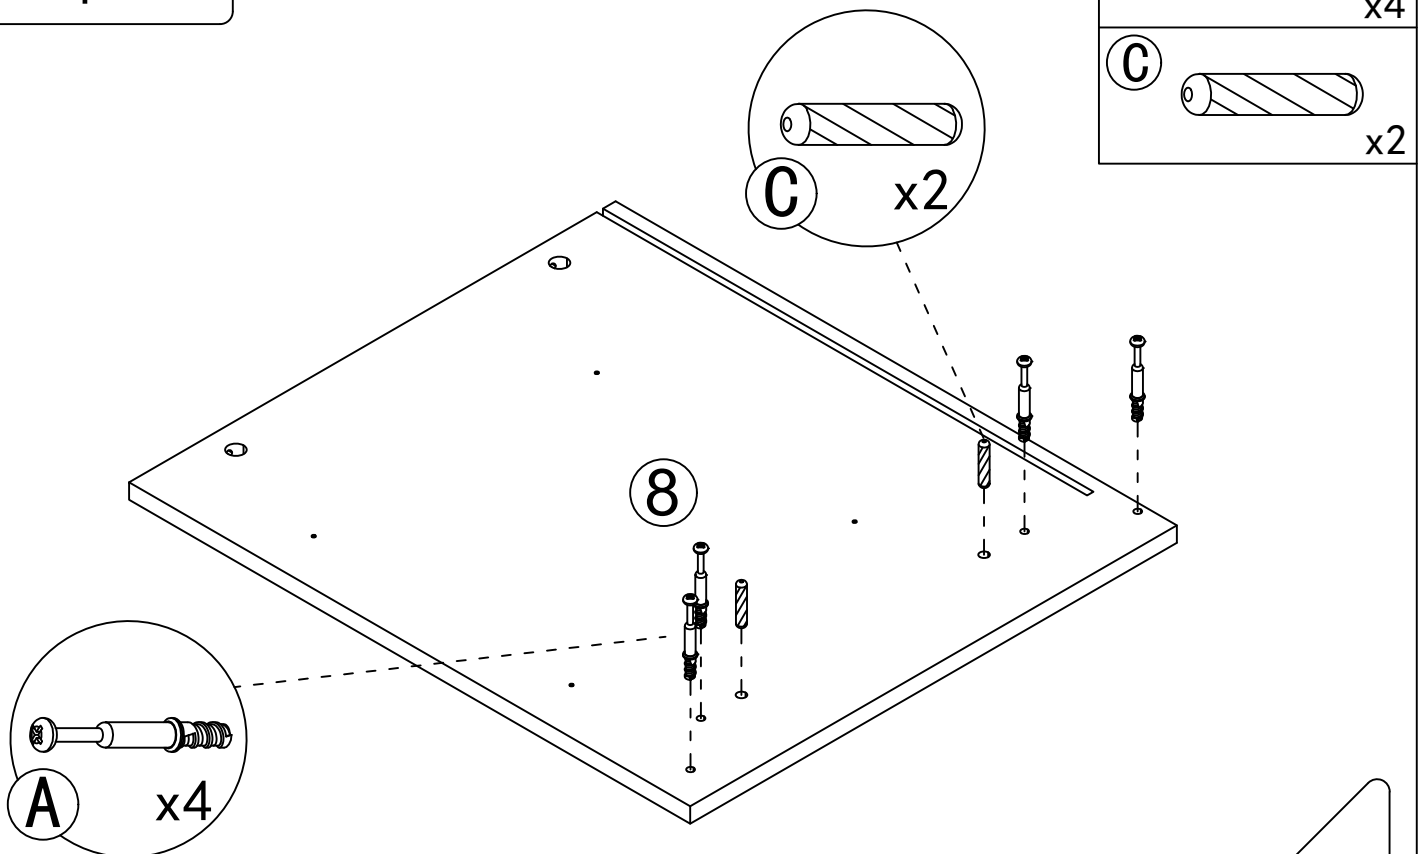

Step 12


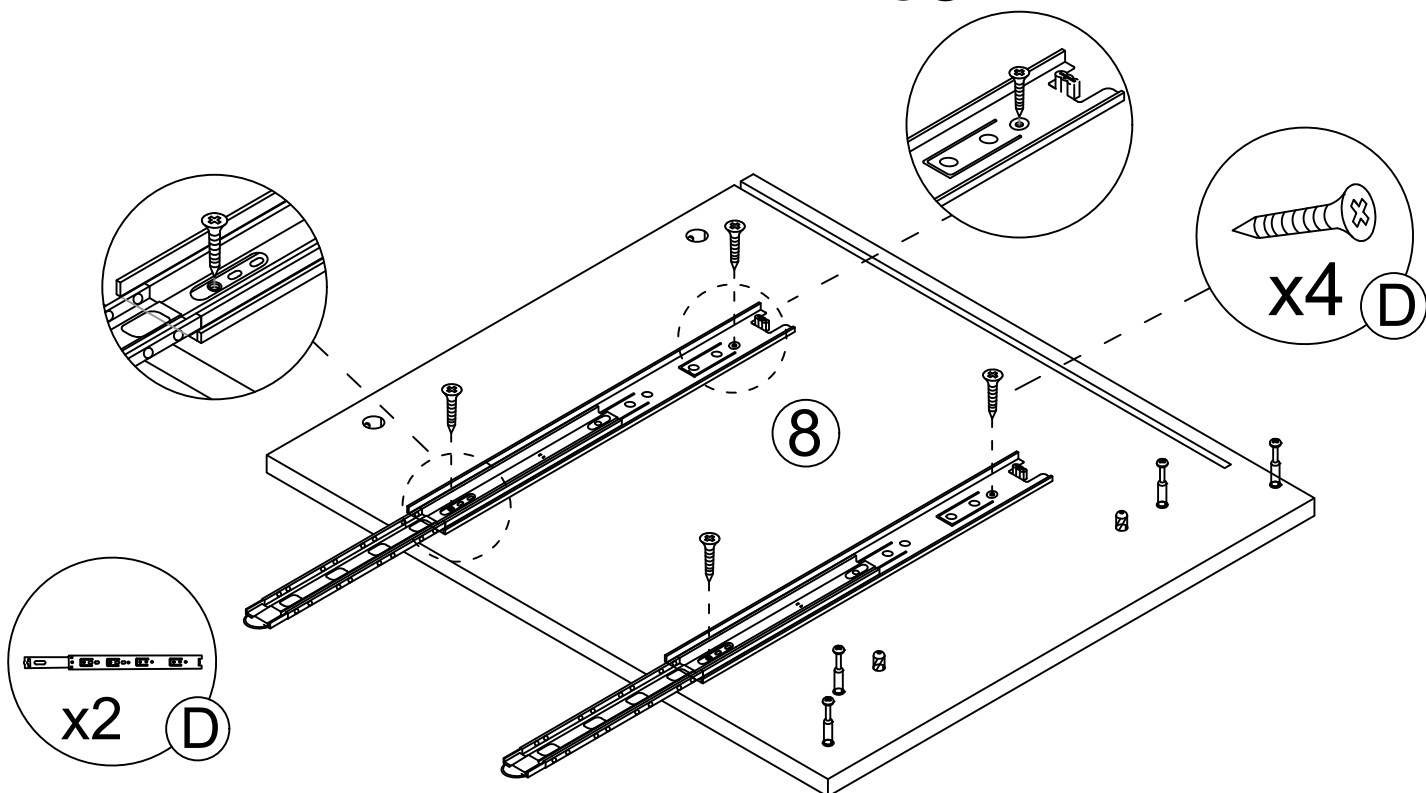

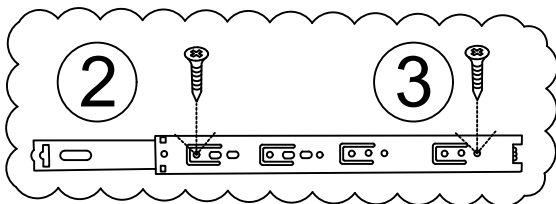


Step 13


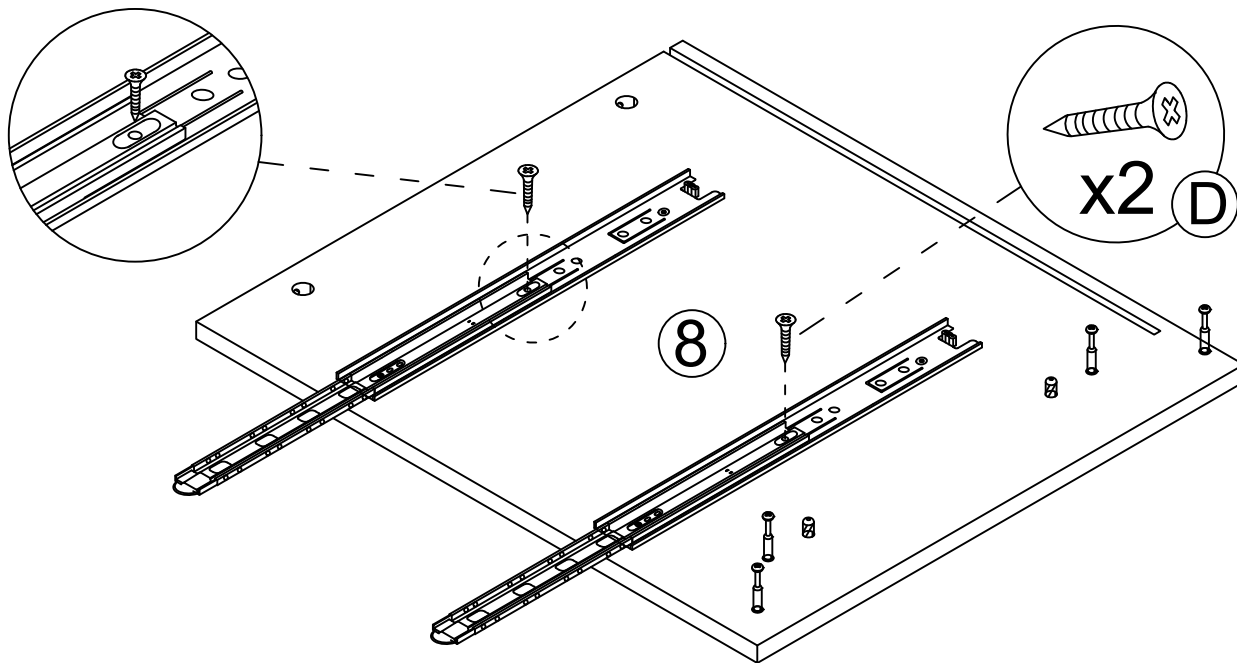



This hole is for strengthening fixed hole customers can choose to install according to their needs.




Step 14

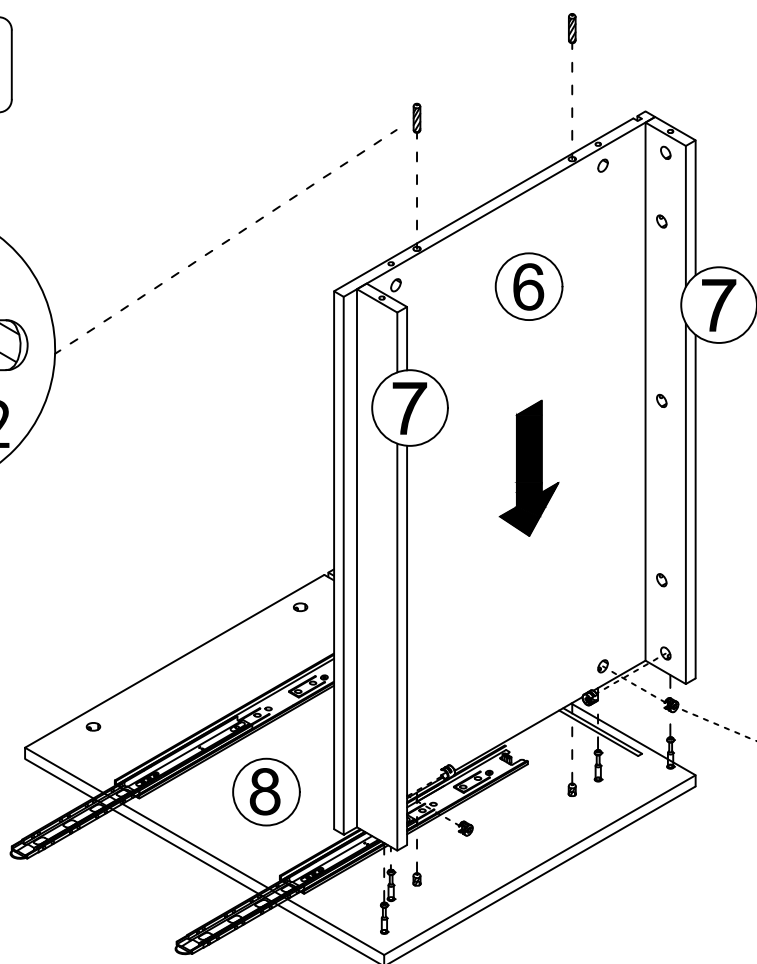



Step 15

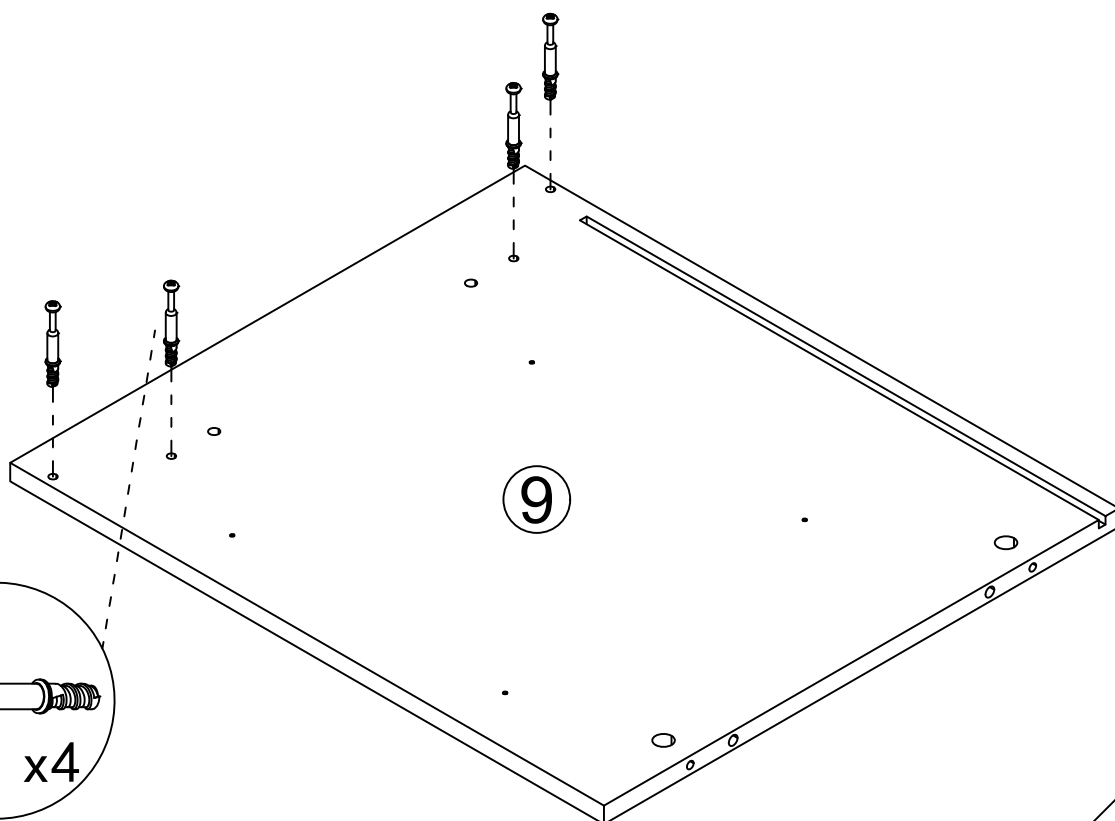

Step 16

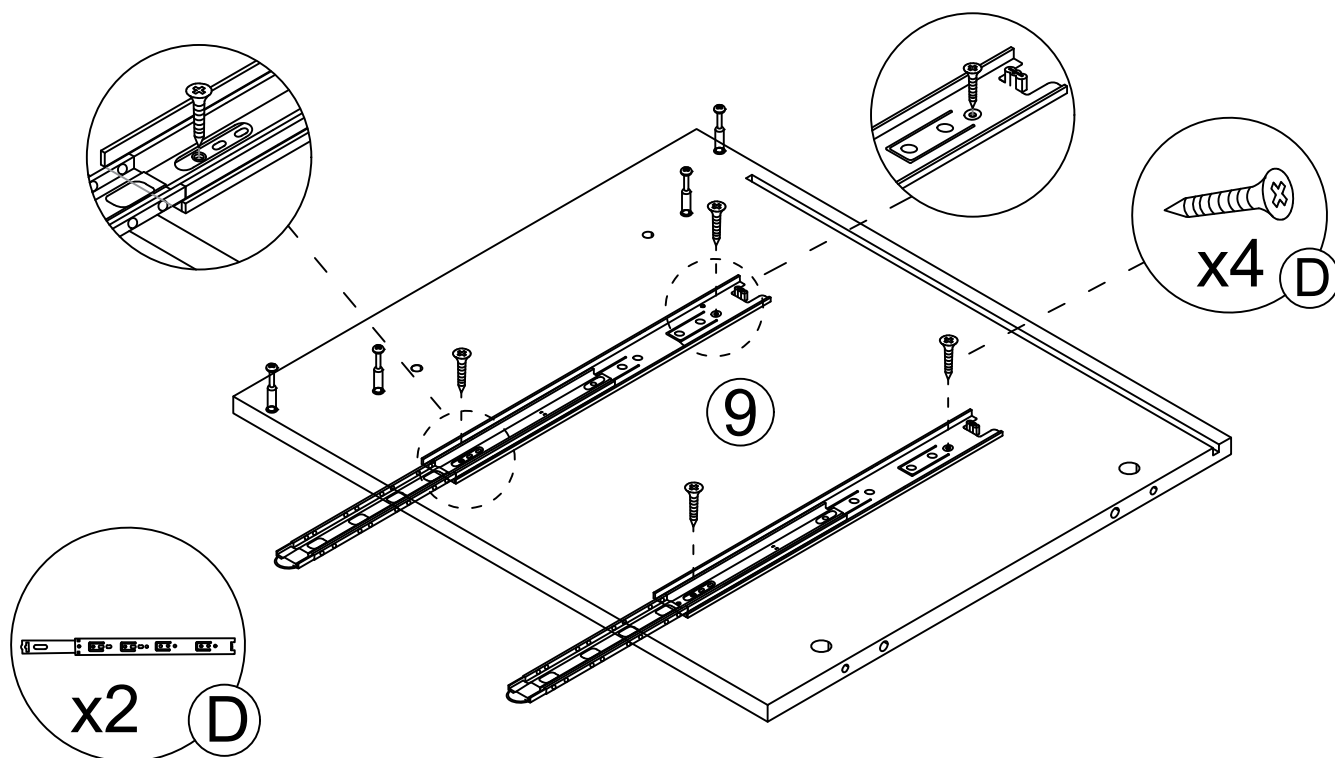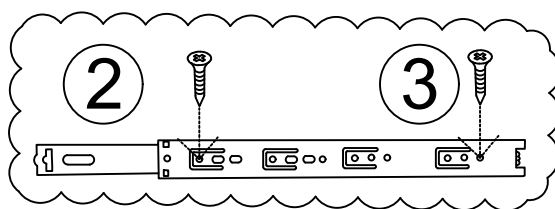

Step 17

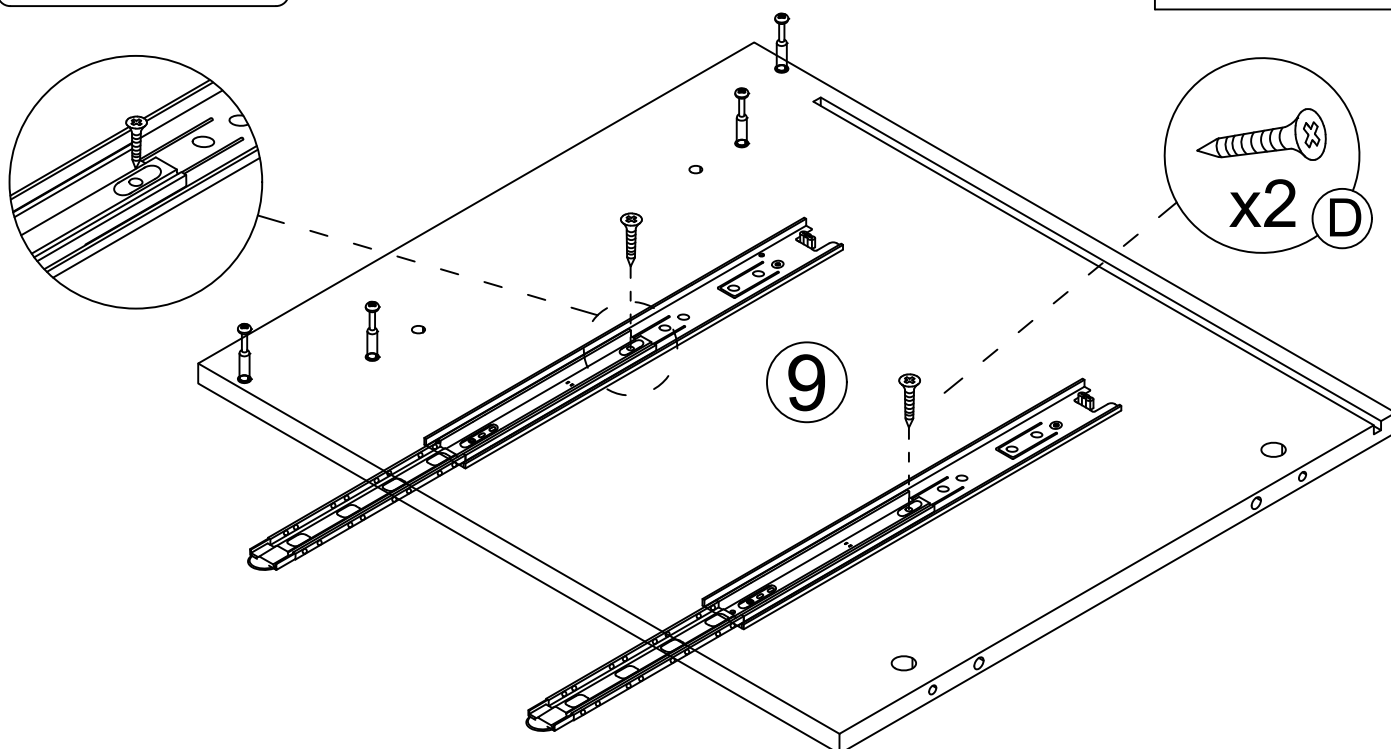


This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 18


Ⓑ






x4

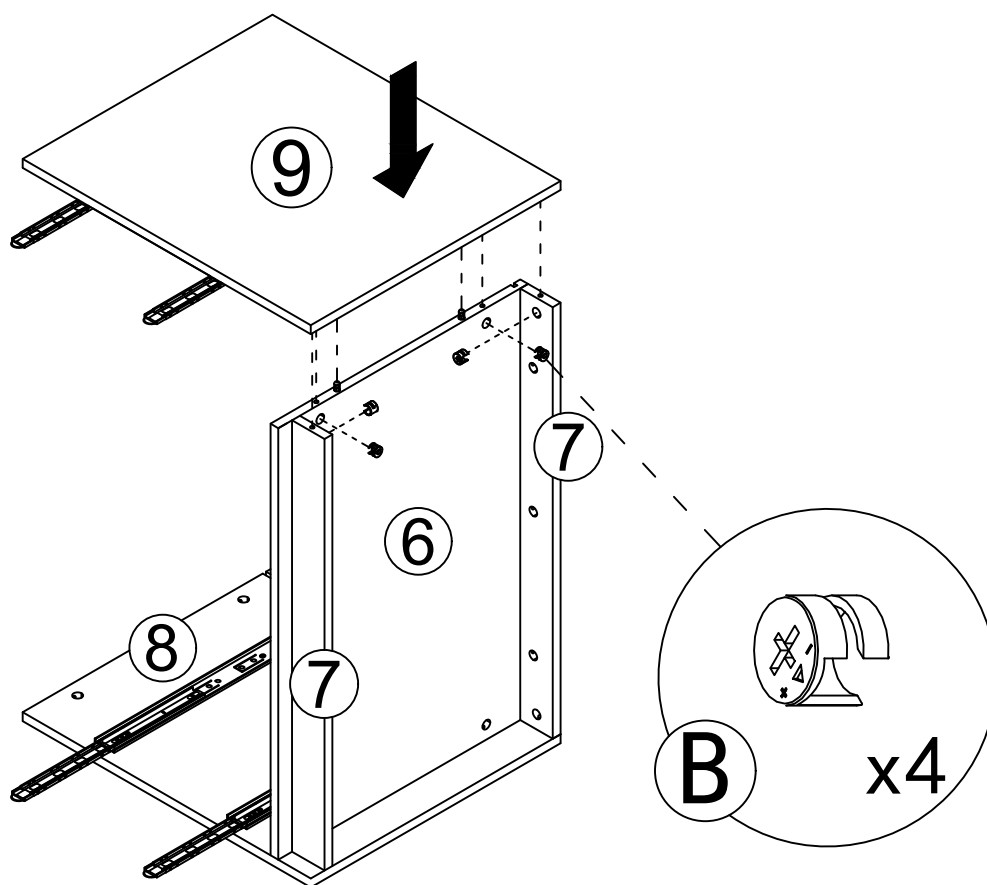




Step 19

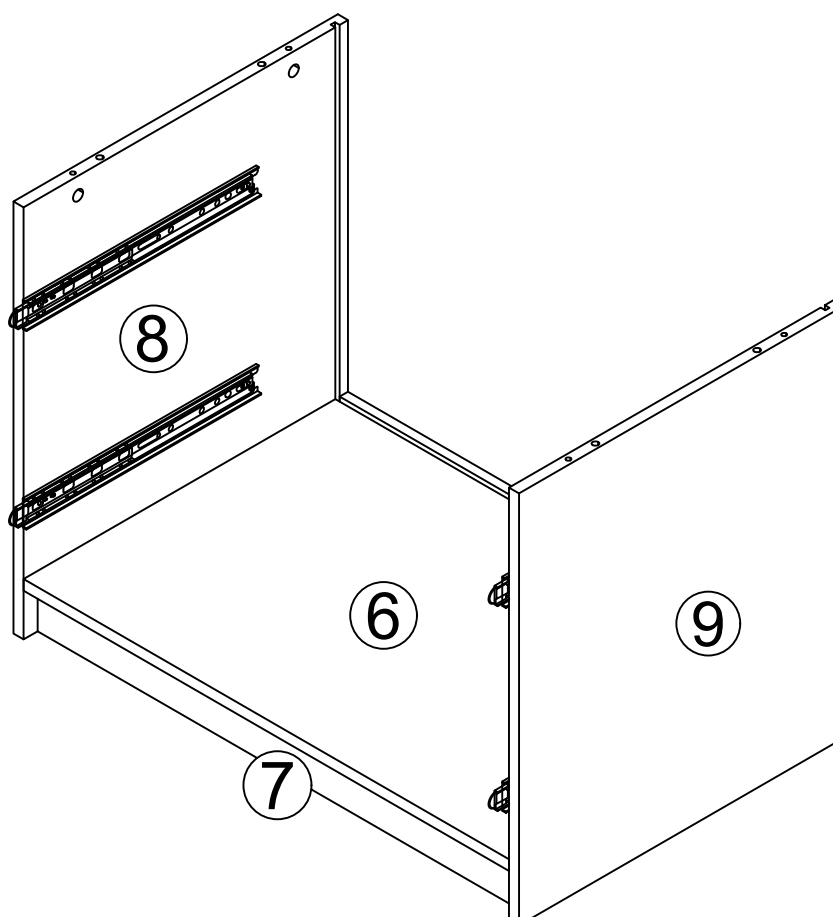

Step 20

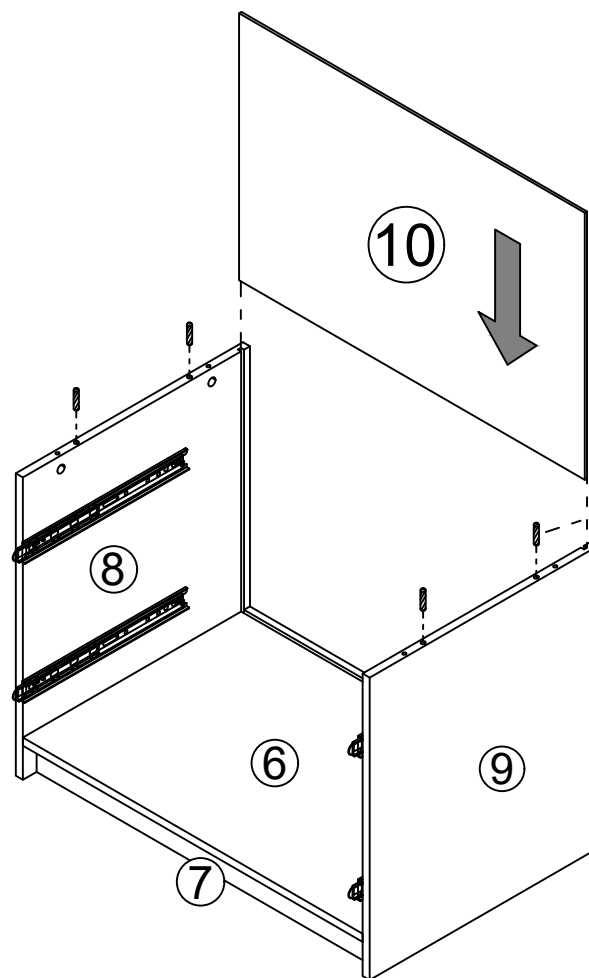


Step 21

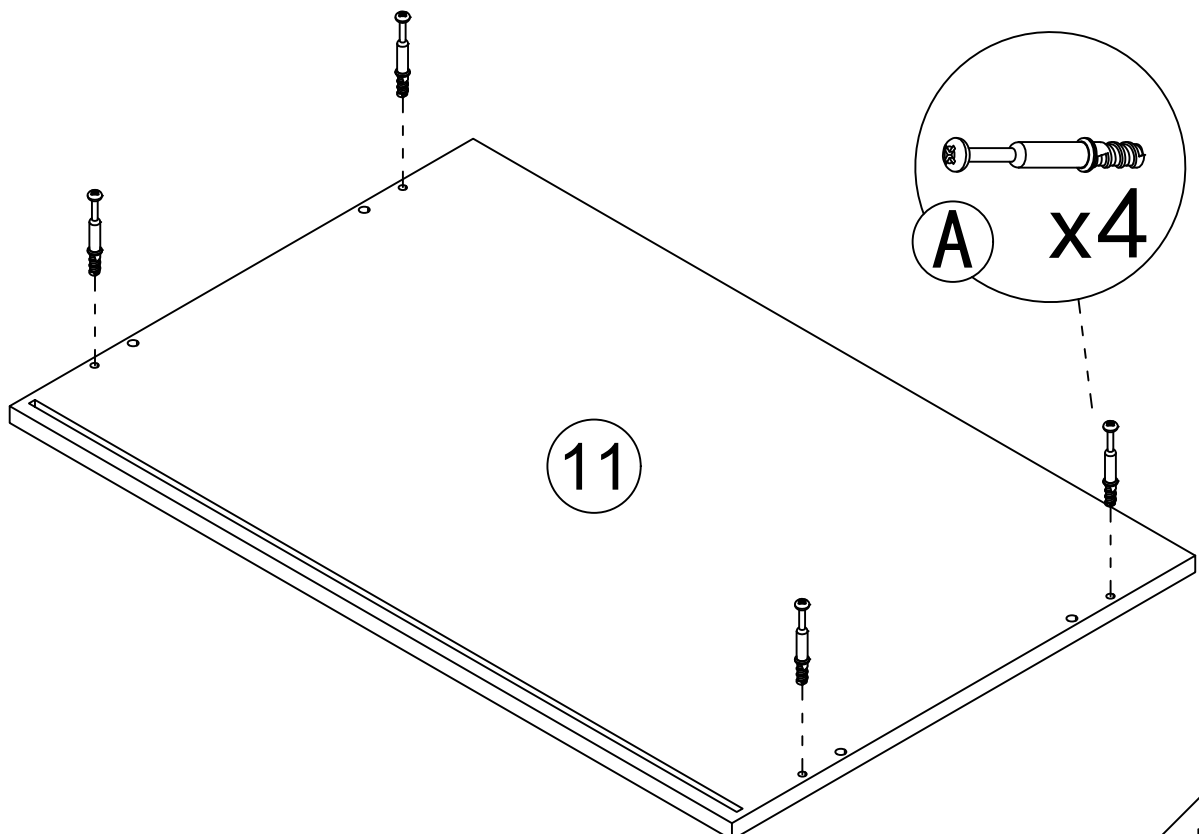

Step 22

Flip it over


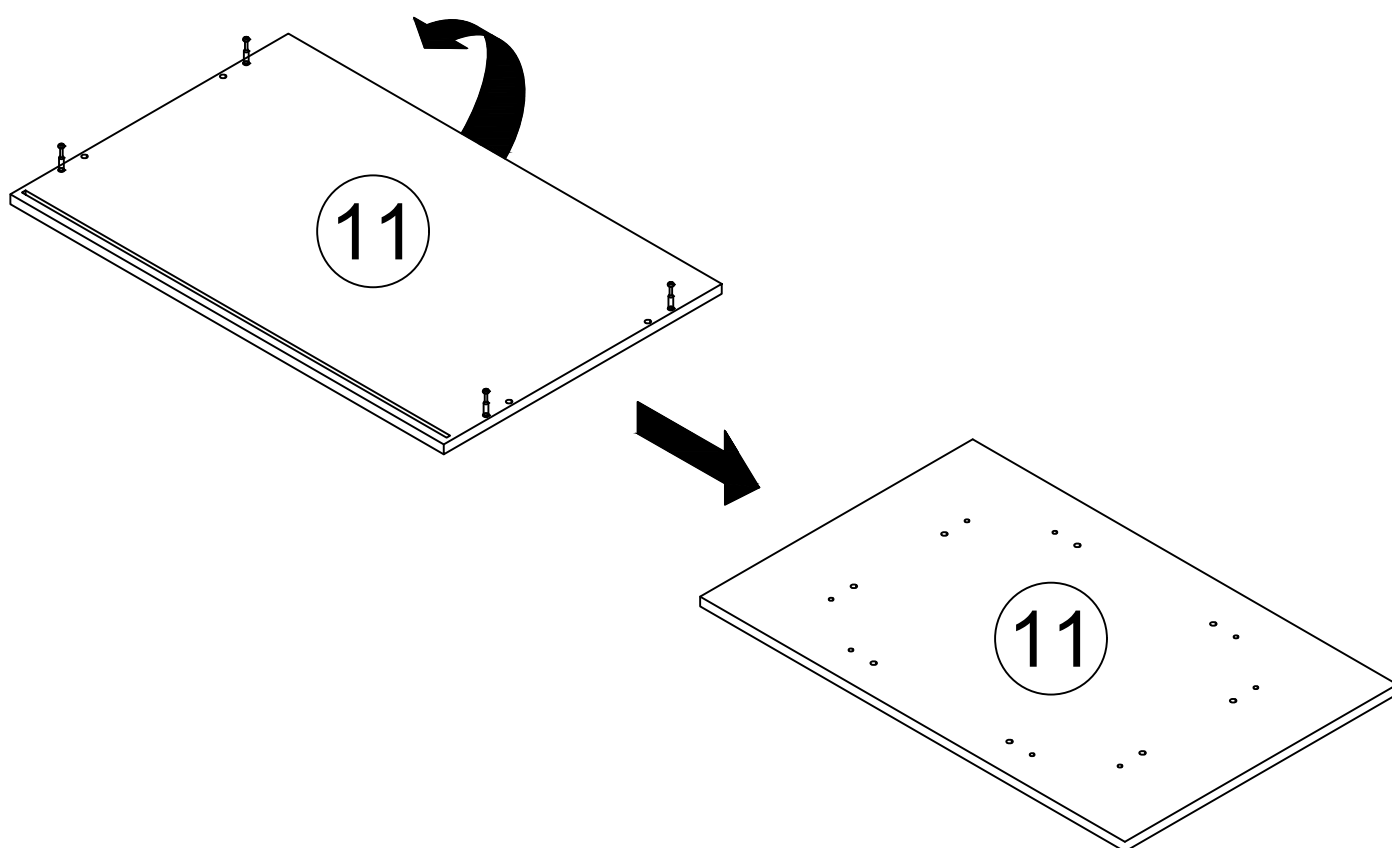


Step 23


(B)



x4

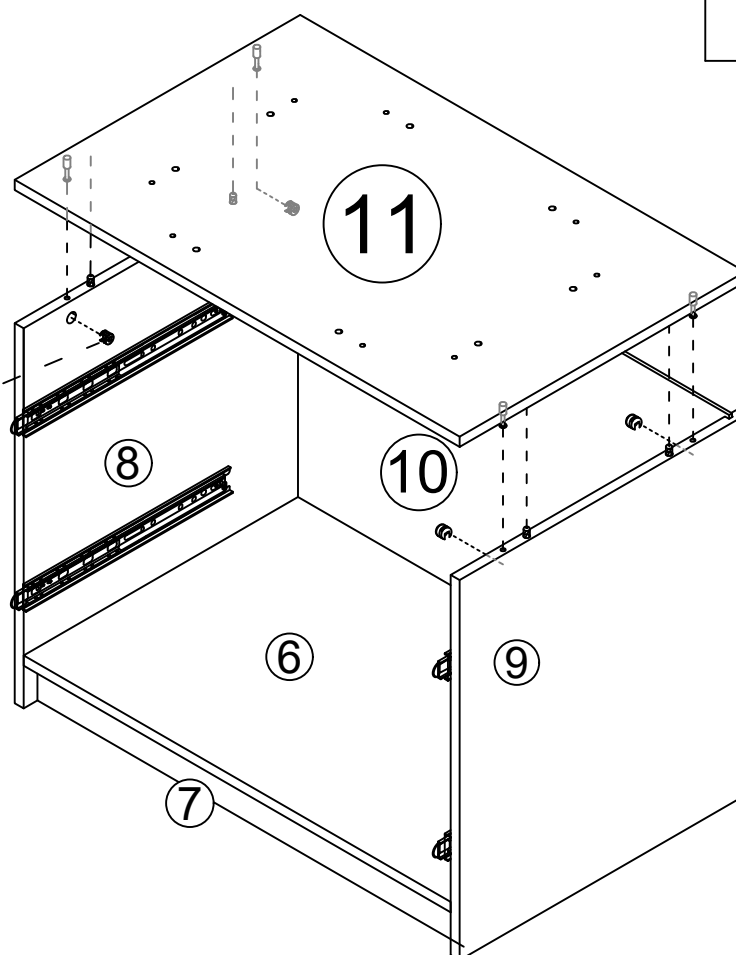


Step 24

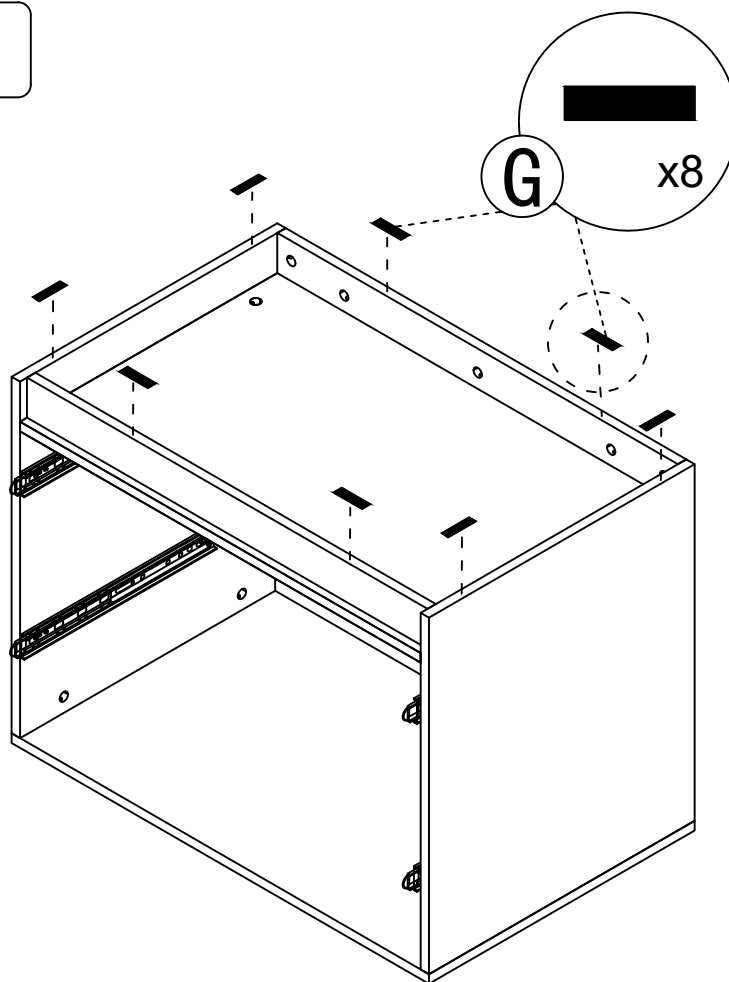


Ⓒ

x8



Step 25

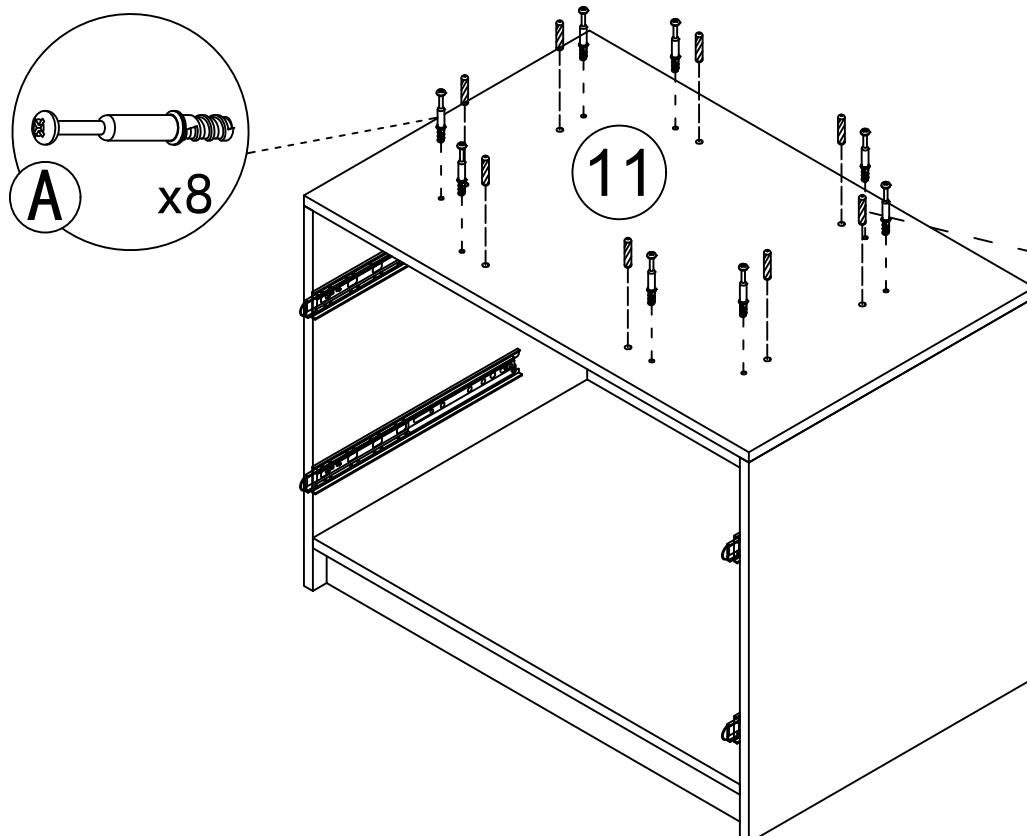

Ⓐ

x8

Ⓒ

x8


Ⓐ

x8



Ⓒ

x8


Step 26

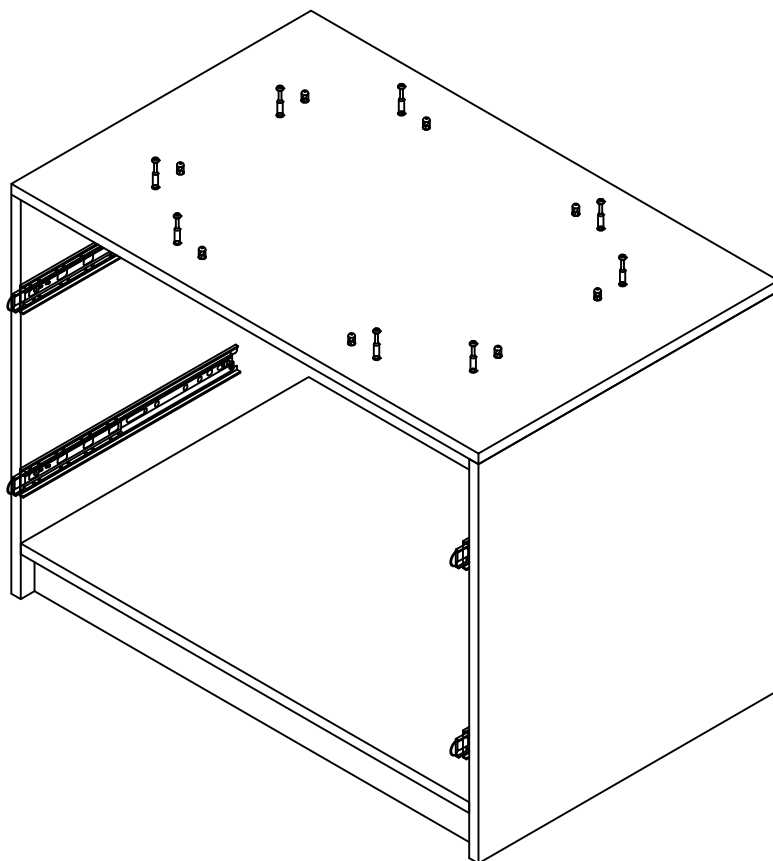



Step 27

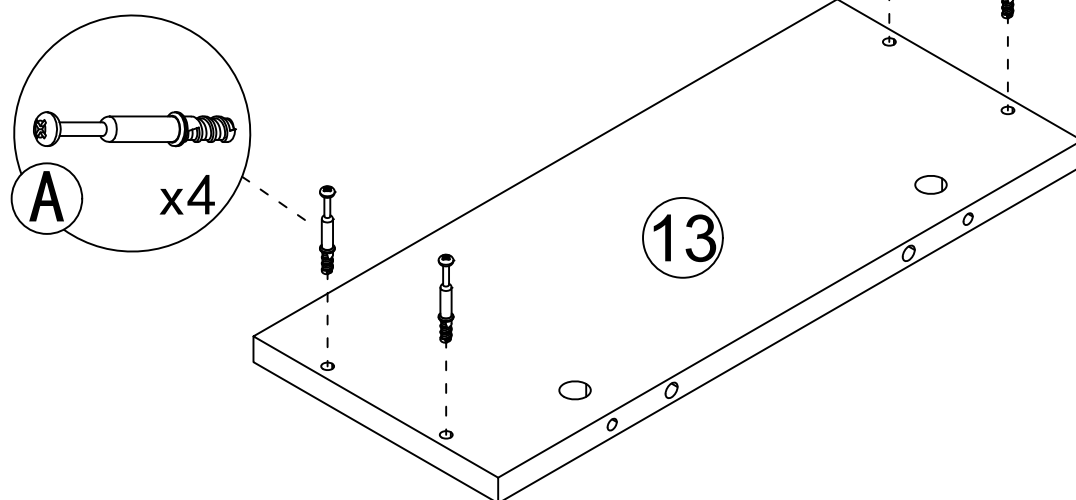

Step 28

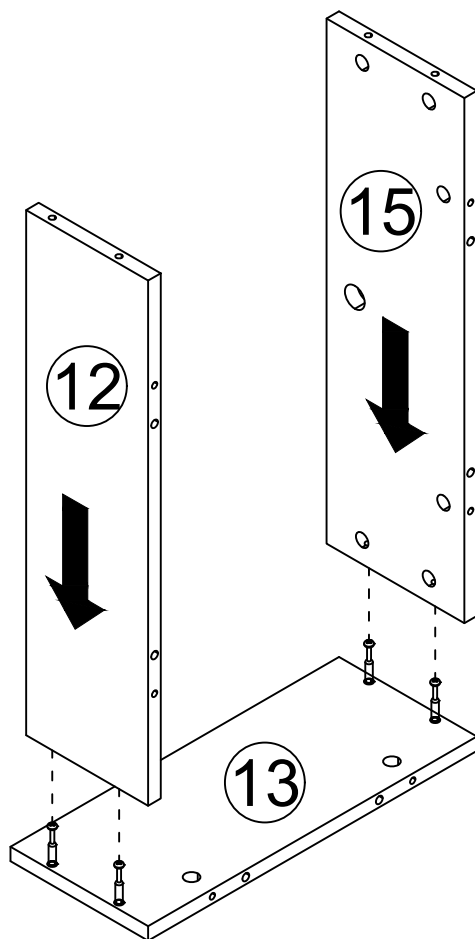

Step 29

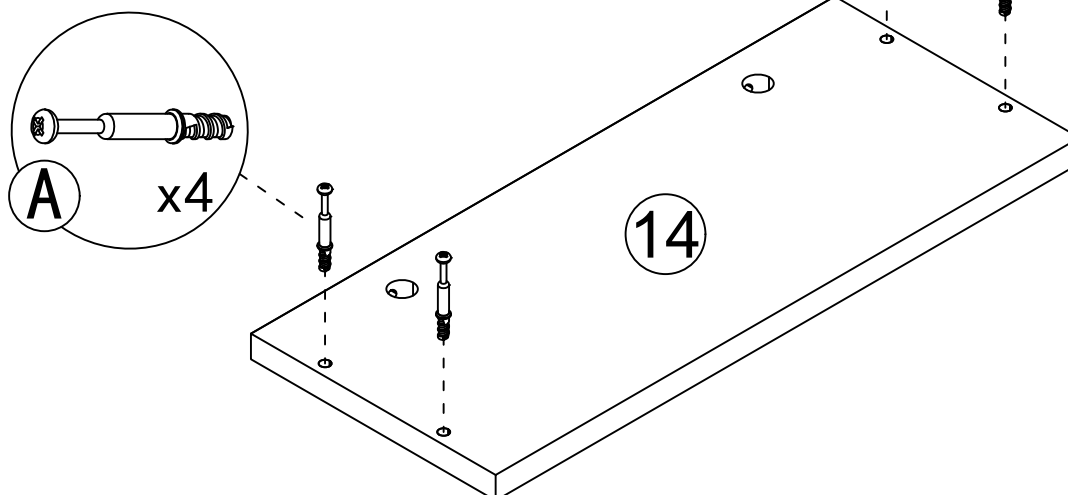



Step 30


Ⓑ




x8

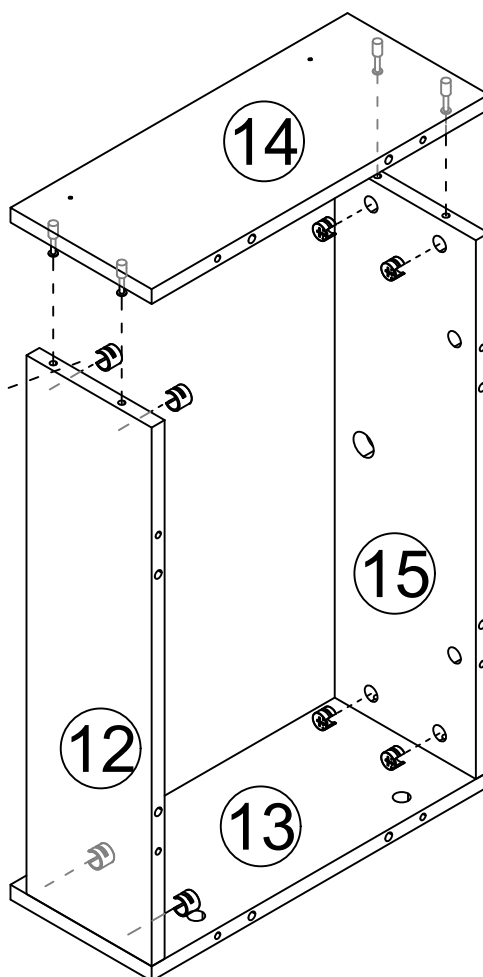


Step 31

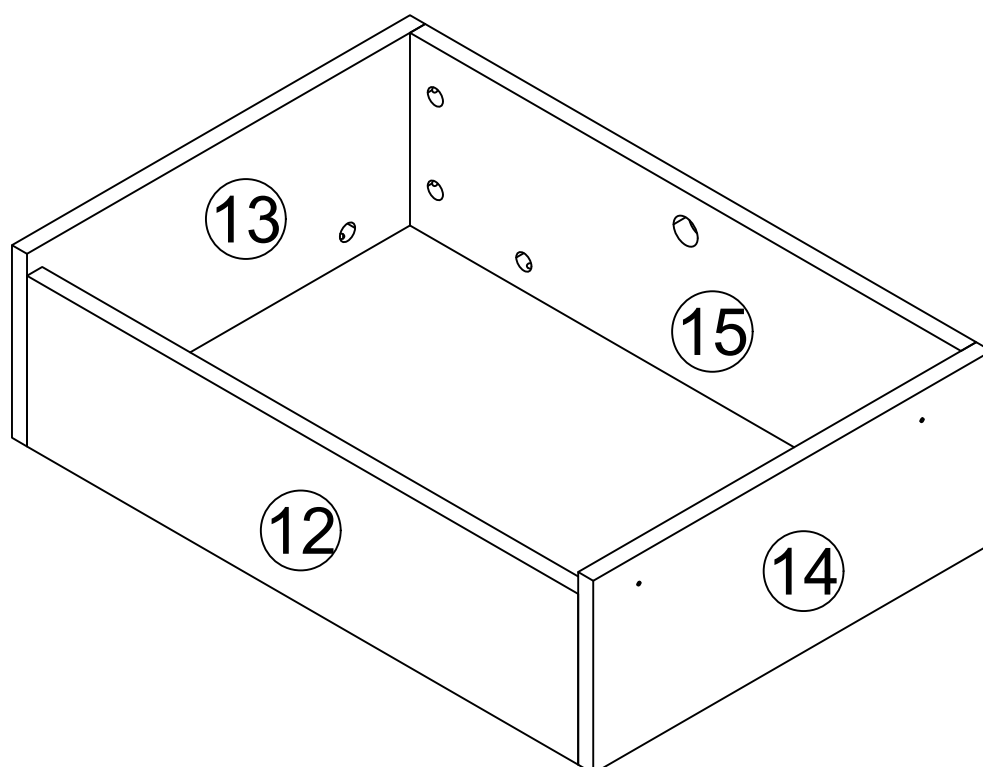


The decomposition of the lock



①



②




③



④


Step 1

1. Facing the direction of the keyhole position with the teeth, clamp the wooden board tightly
2. Insert part 1 into the hole of the K plate first, and then lock the hex nut

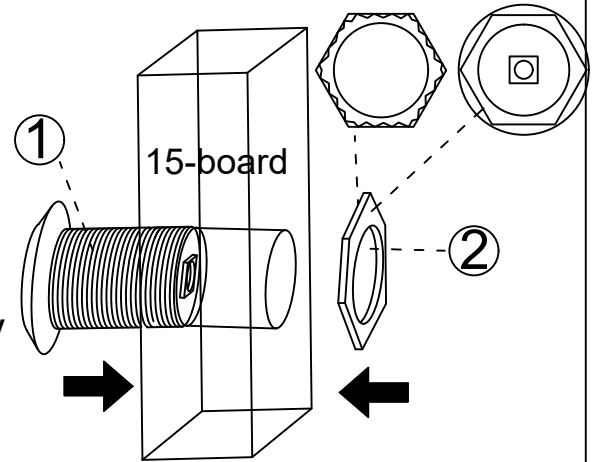


Step 2

1. Clip part 3 into the tail of part 1
2. The hole position of the key and the direction of the iron plate are the same

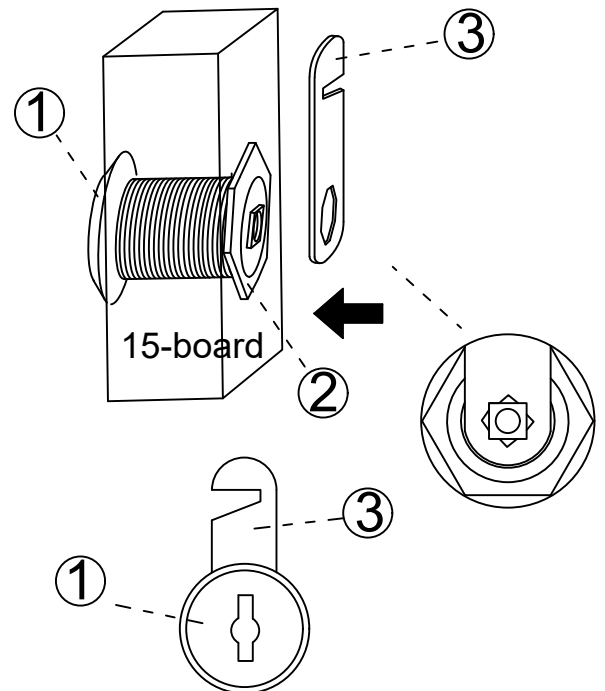


Step 3

1. Twist screw 4 into the hole position at the tail of 1


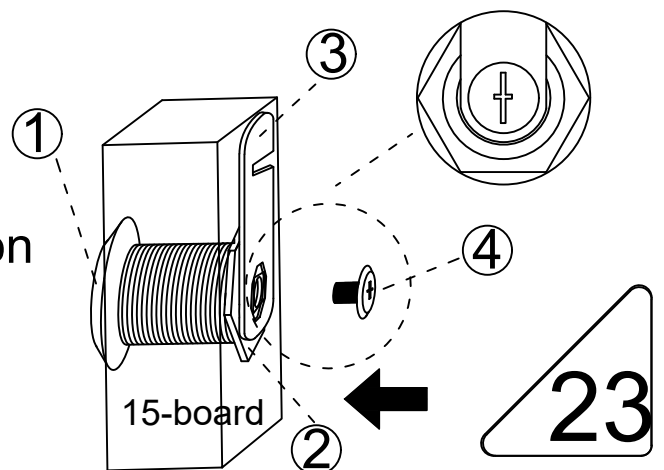


Unlock steps

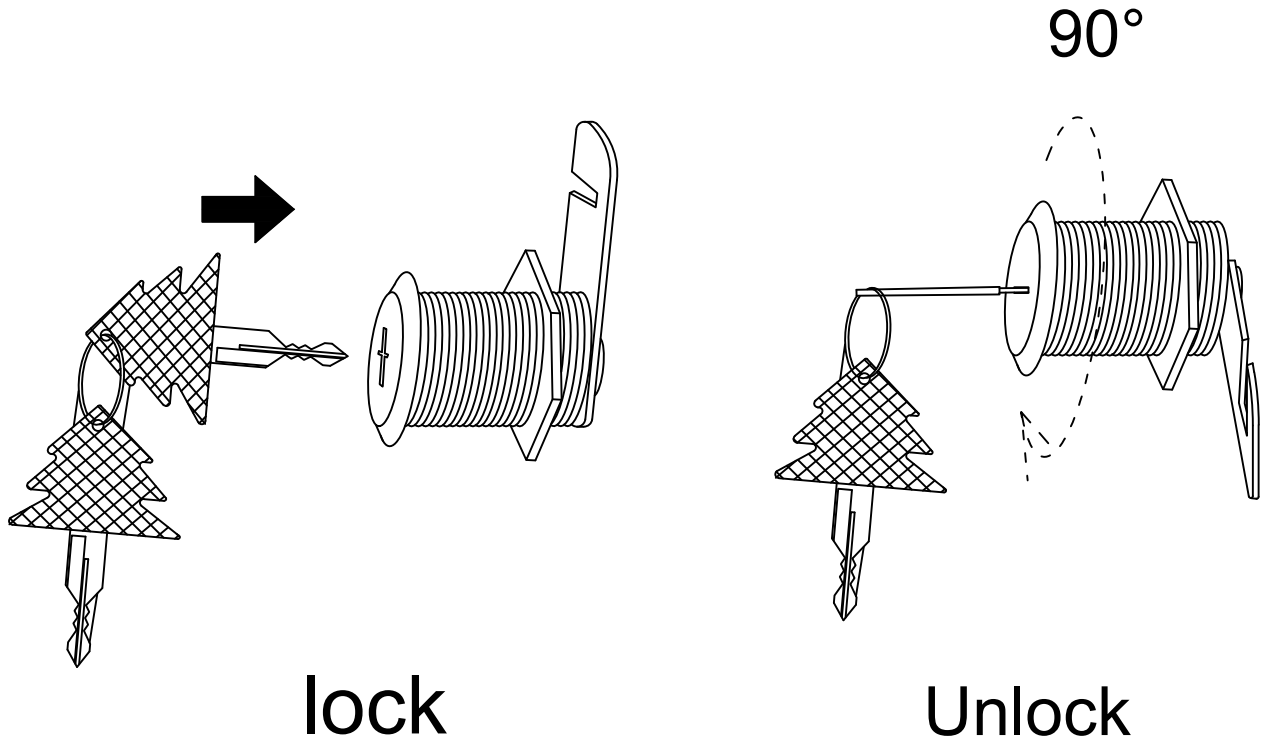


Step 32

Pay attention to the direction of the hole position

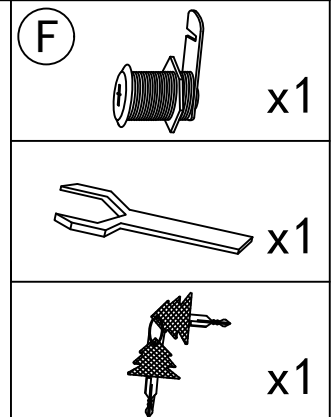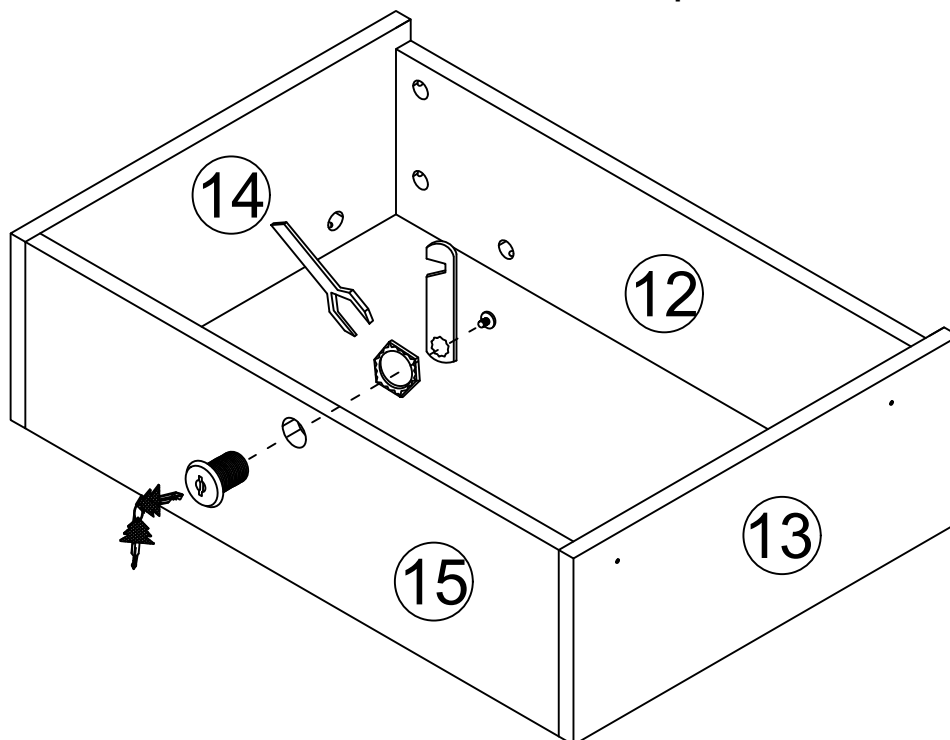



Lock the hex nut with a wrench

Drawer rail breakdown diagram

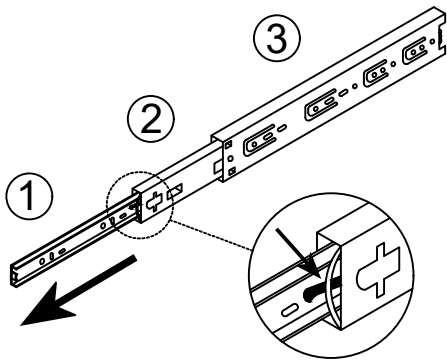


Step 1 : Pull the rails apart

Step 2 : Push the nylon buckle outward ①

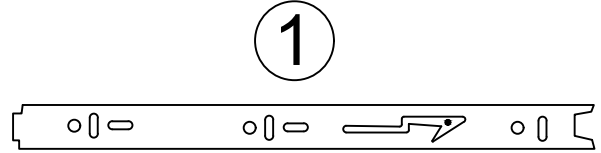

②

③



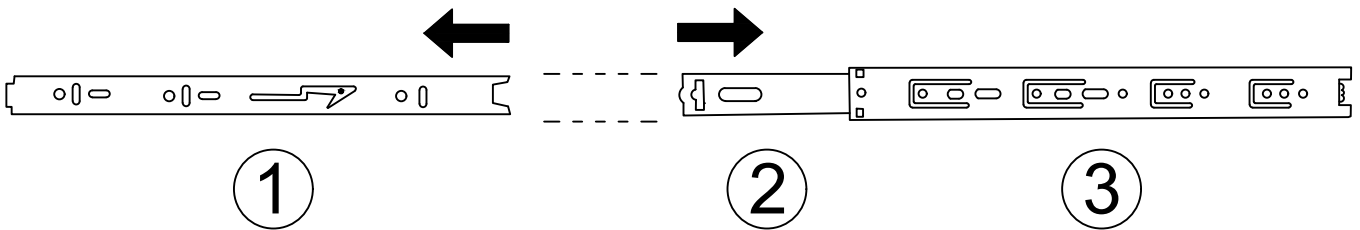


①

②


③

Step 33

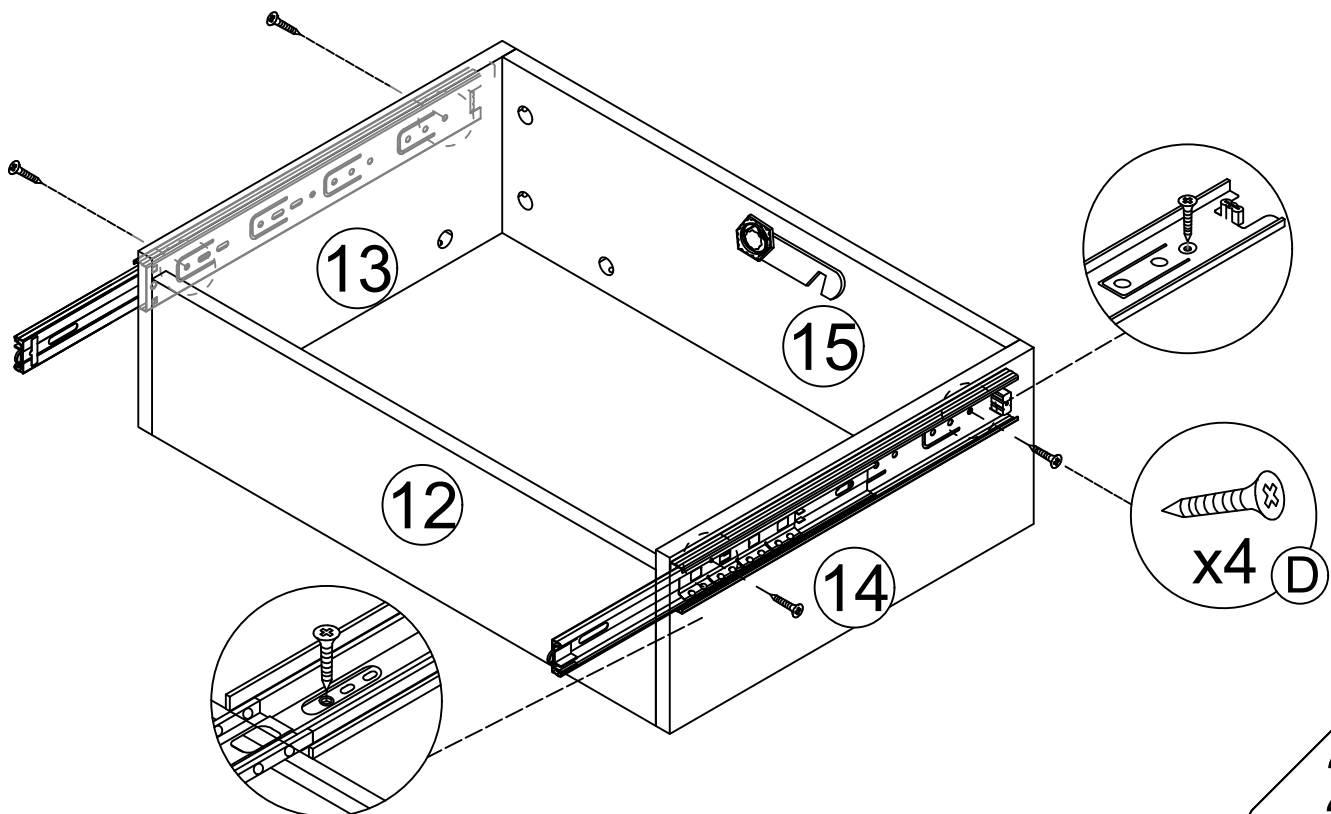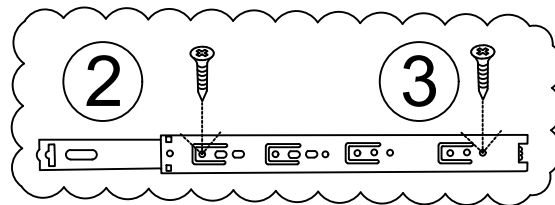


Step 34

ⓓ



x2

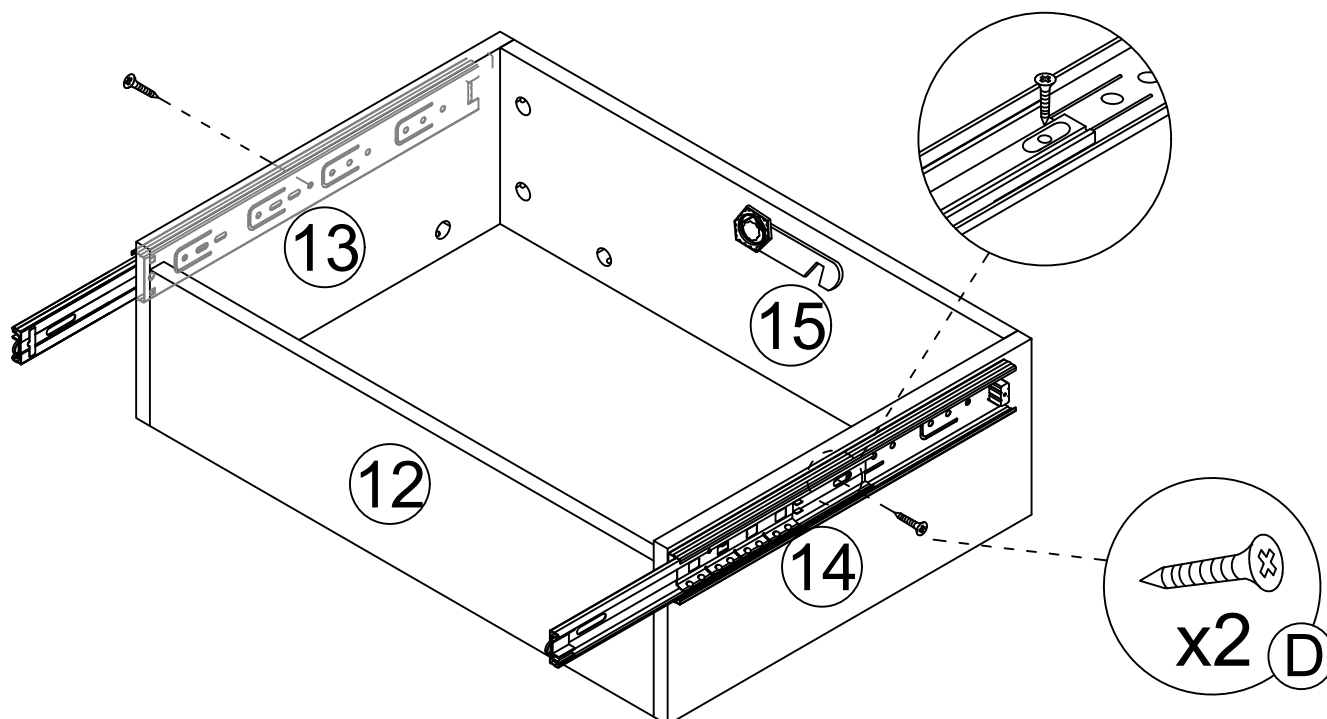


This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 35


ⓑ








x8

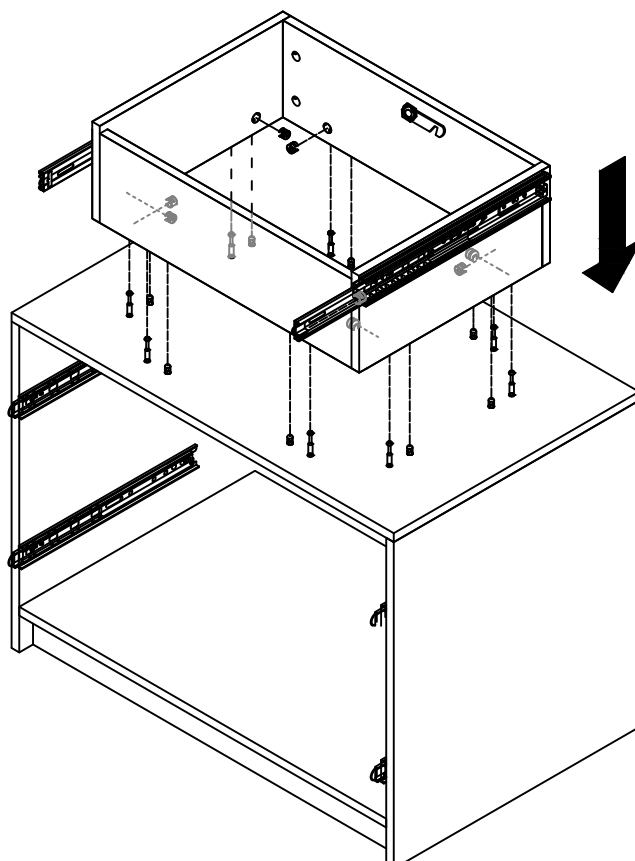



Step 36

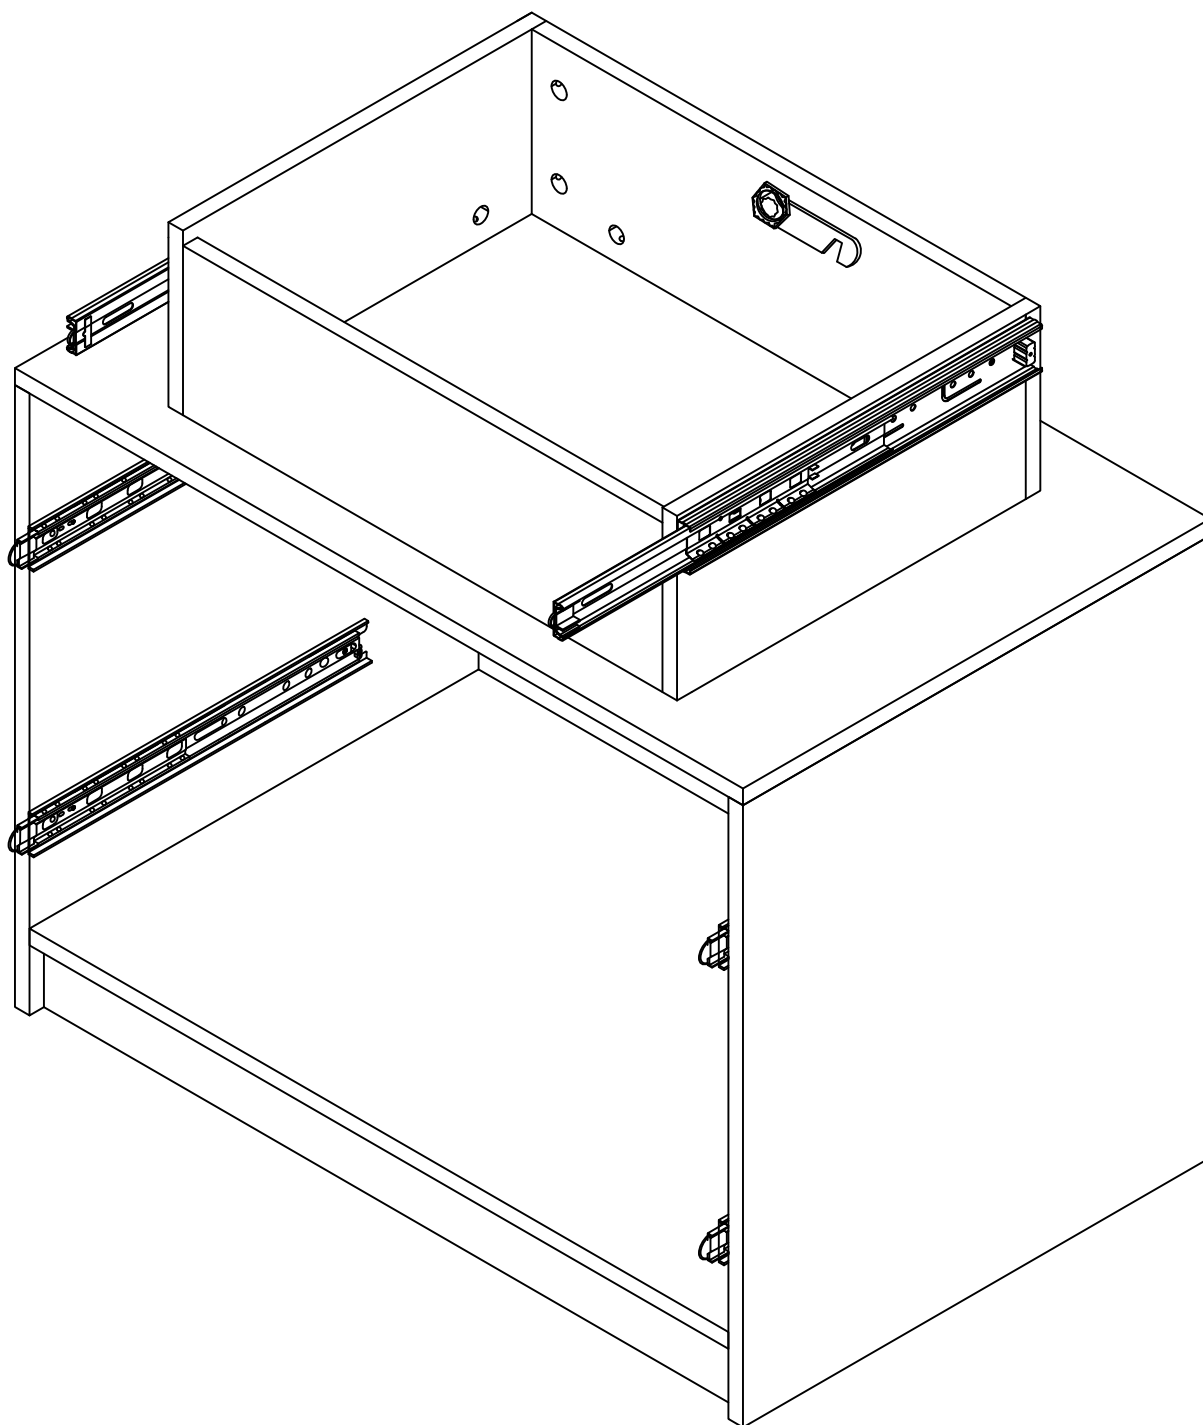


A		12pcs	C		6pcs
B		12pcs	D		2pcs 6pcs
E	 	4pcs			

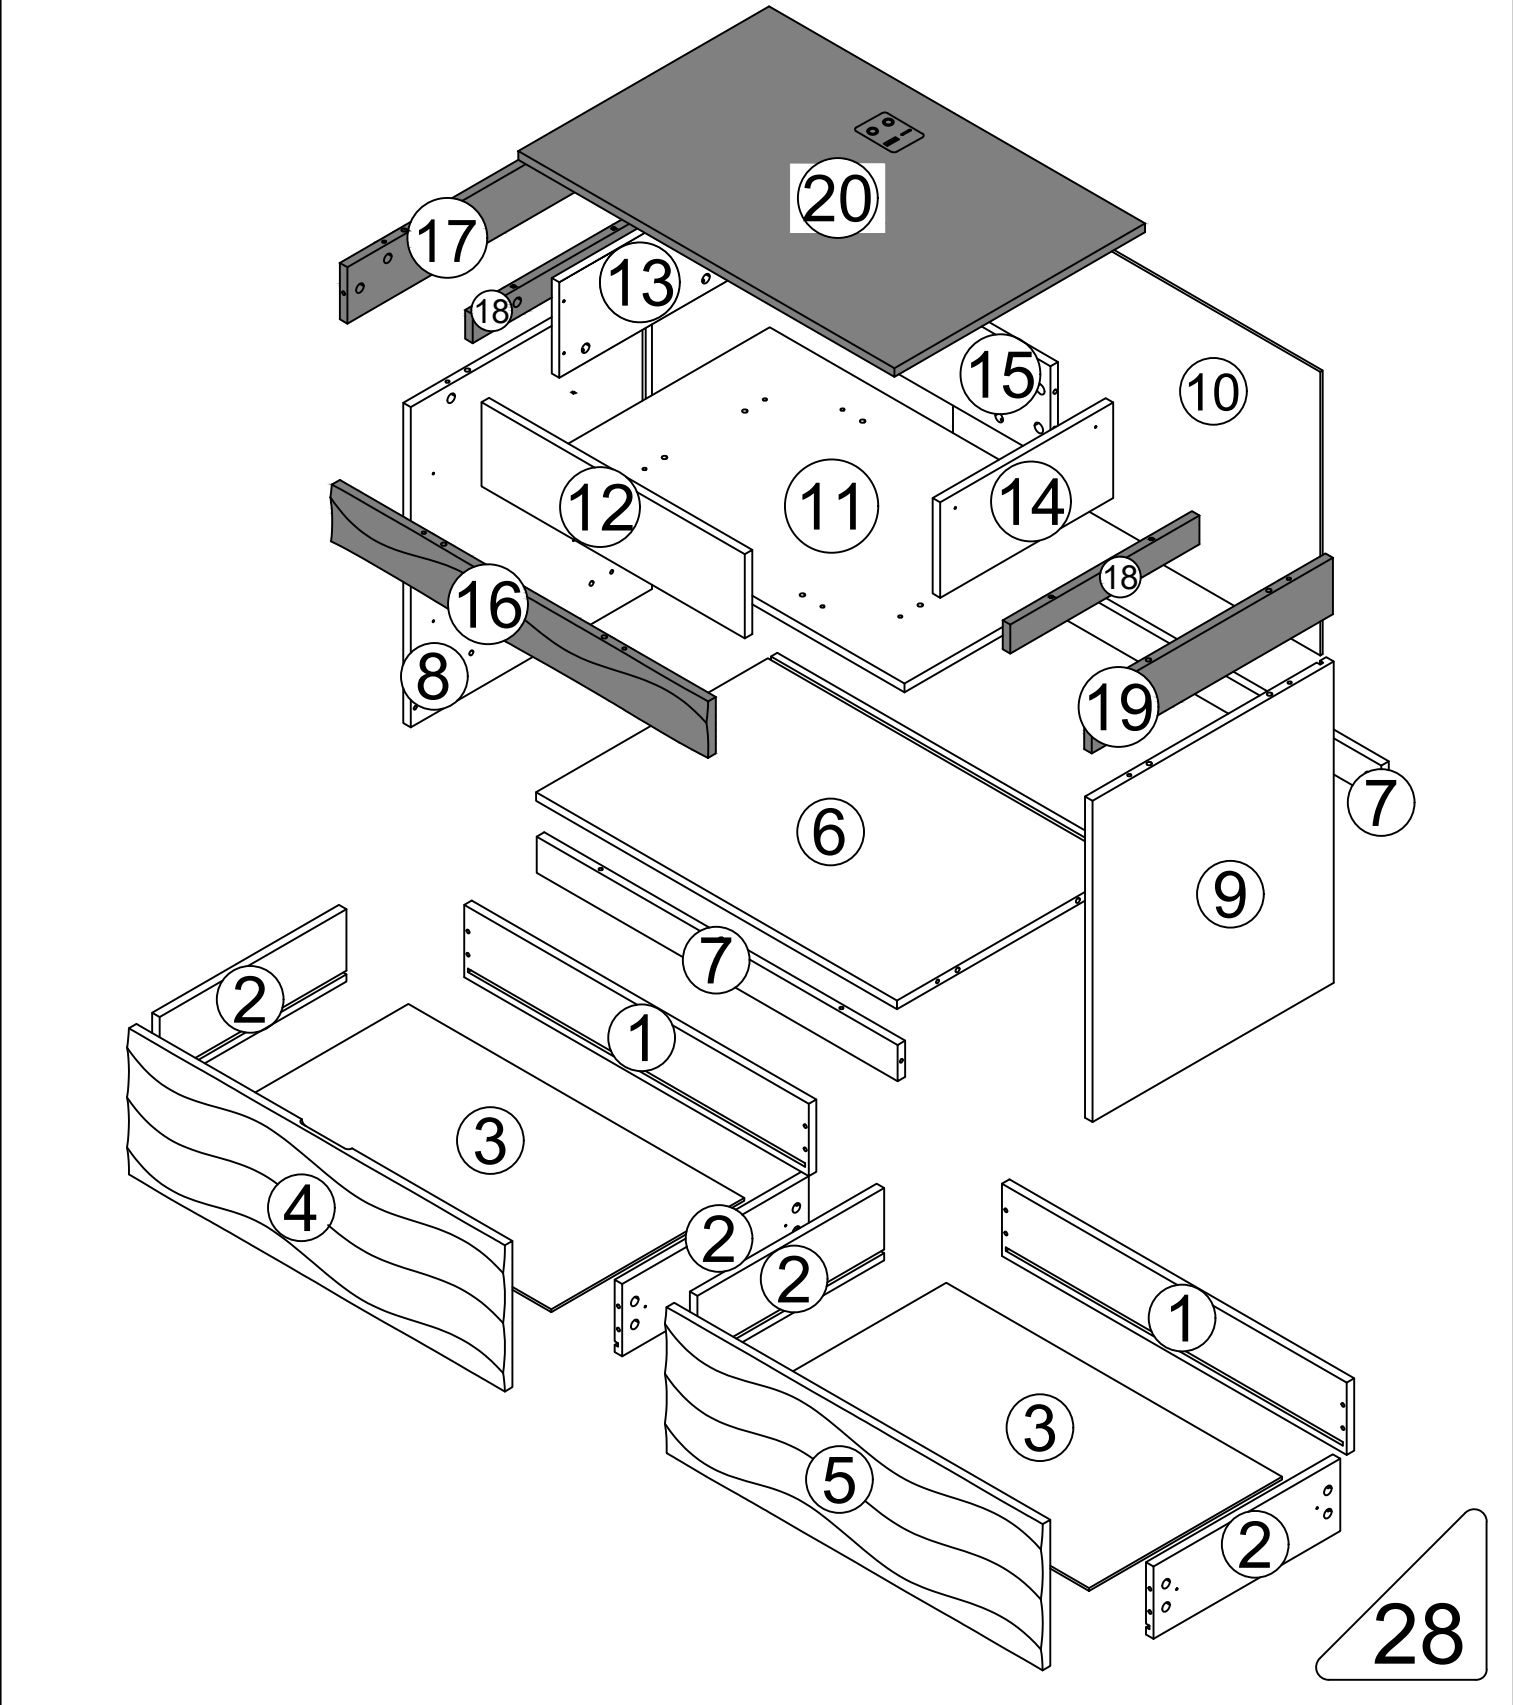


Step 37

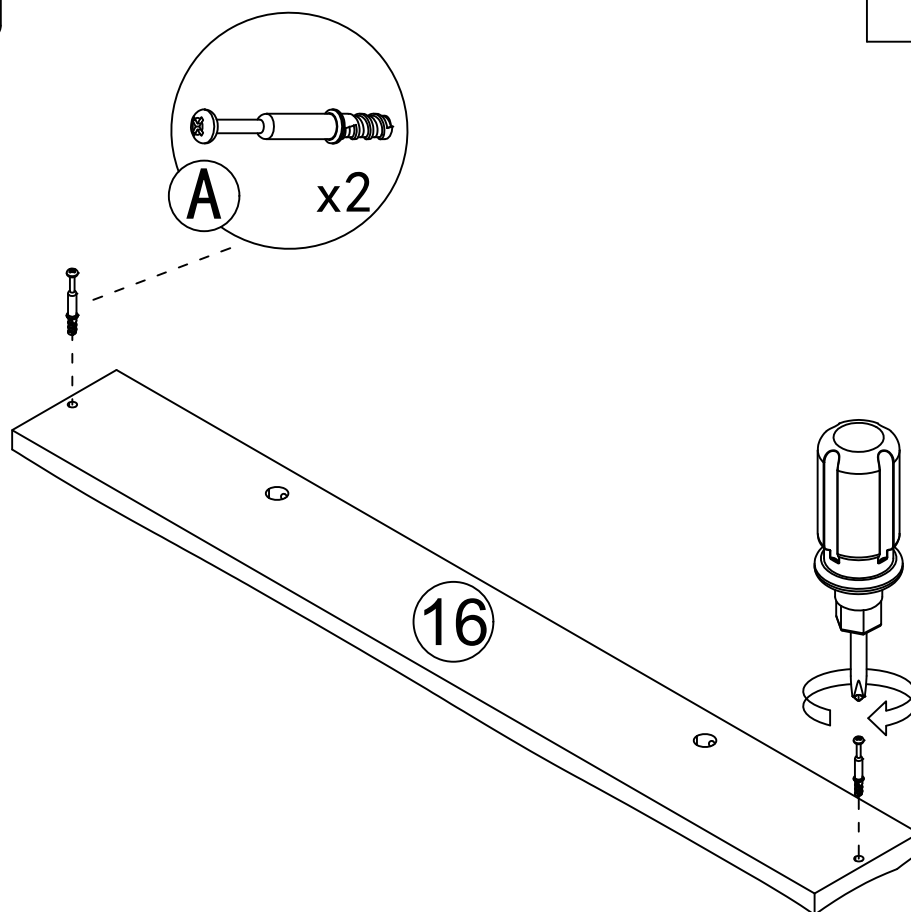


Step 38

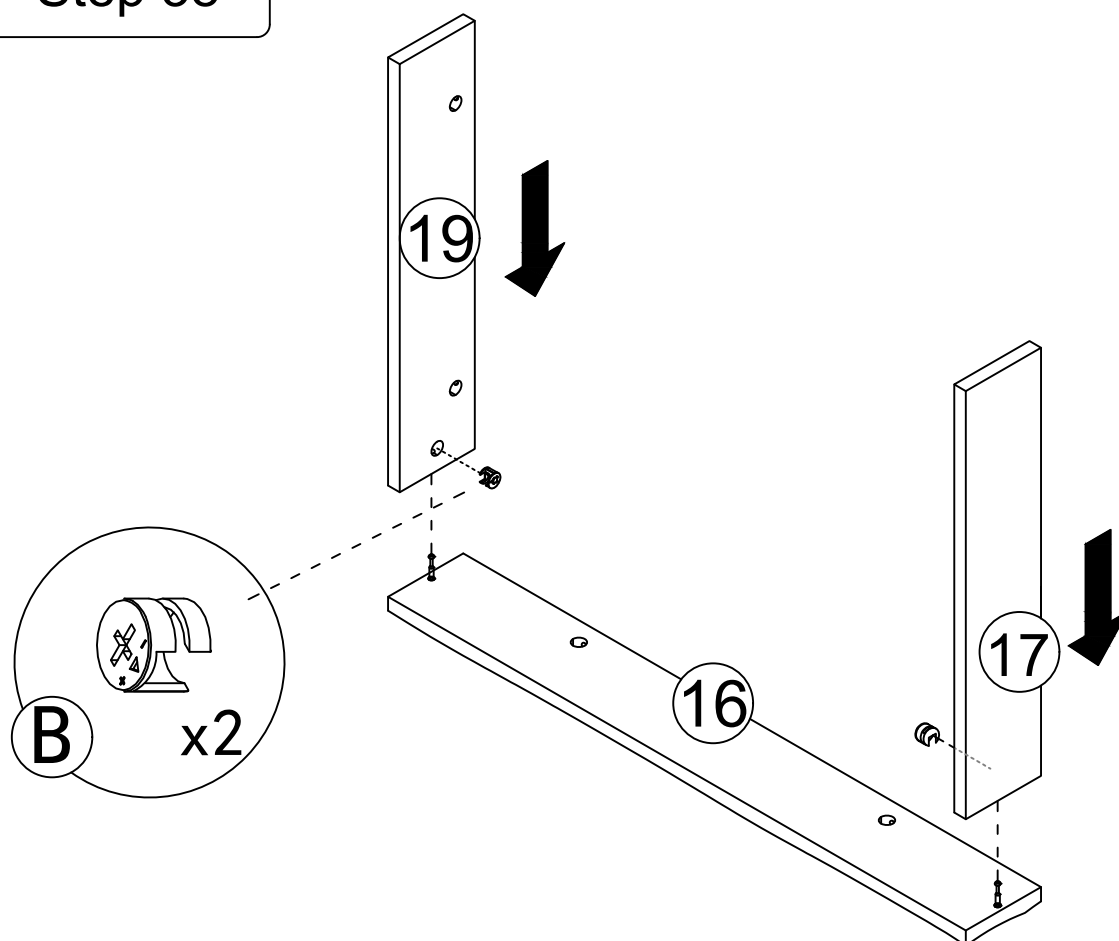

Step 39

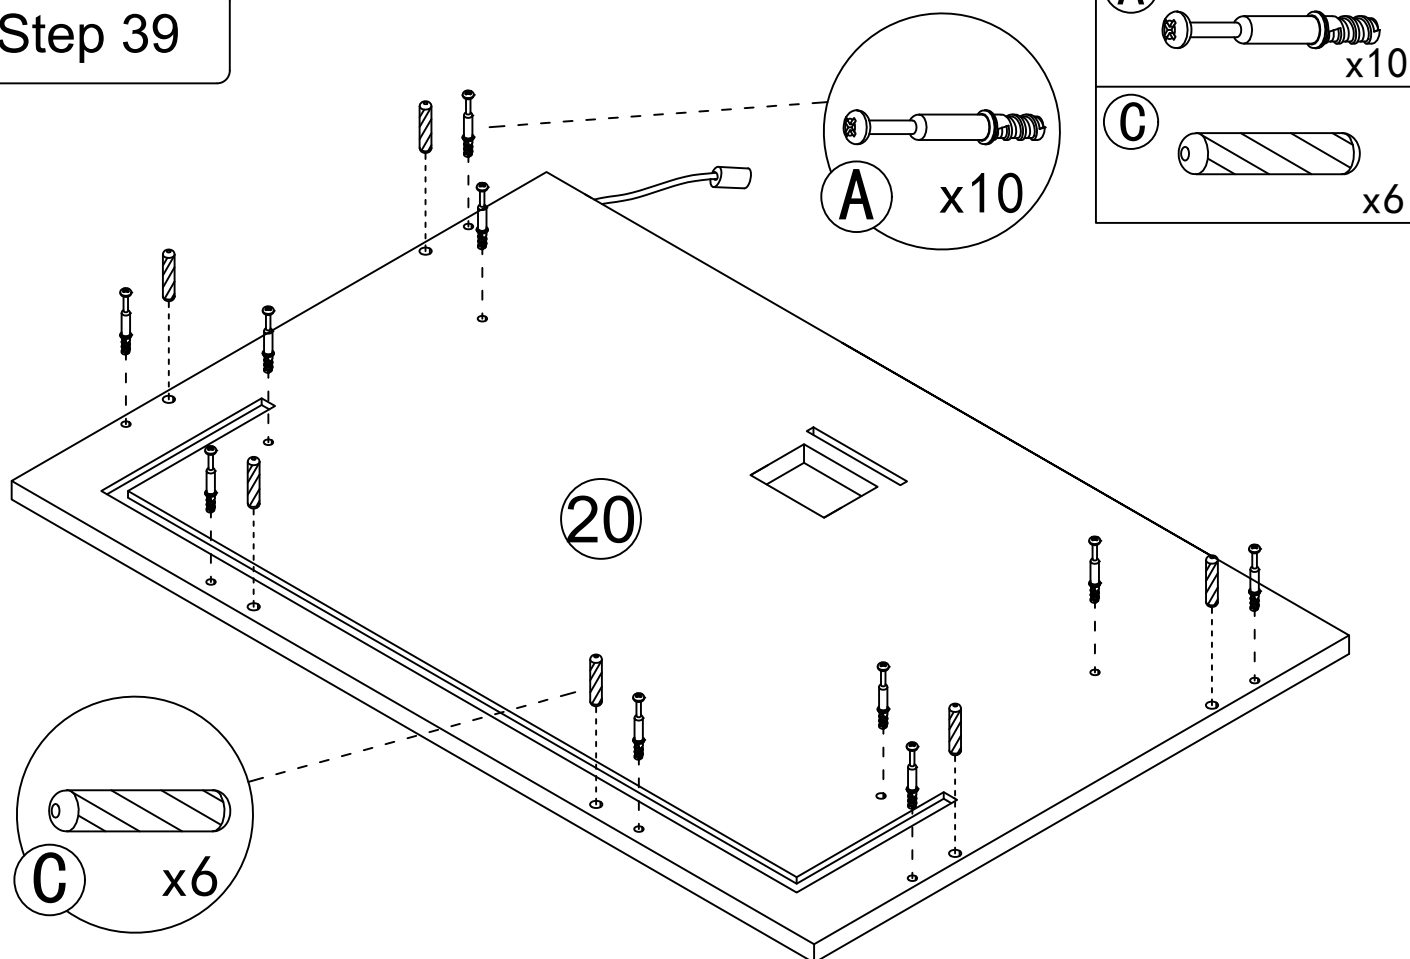

Step 40

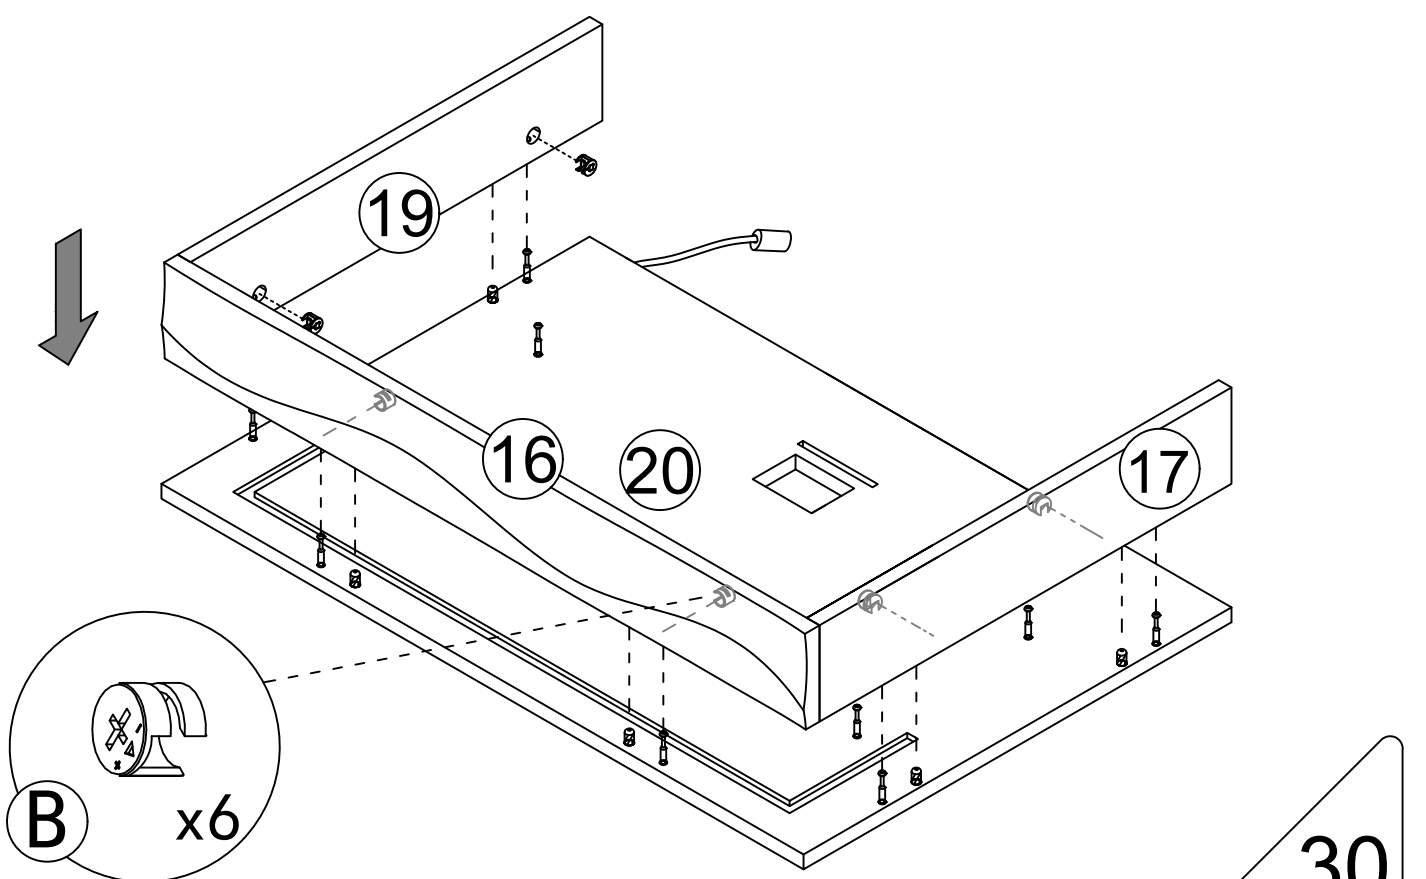


Step 41

(B)




x4

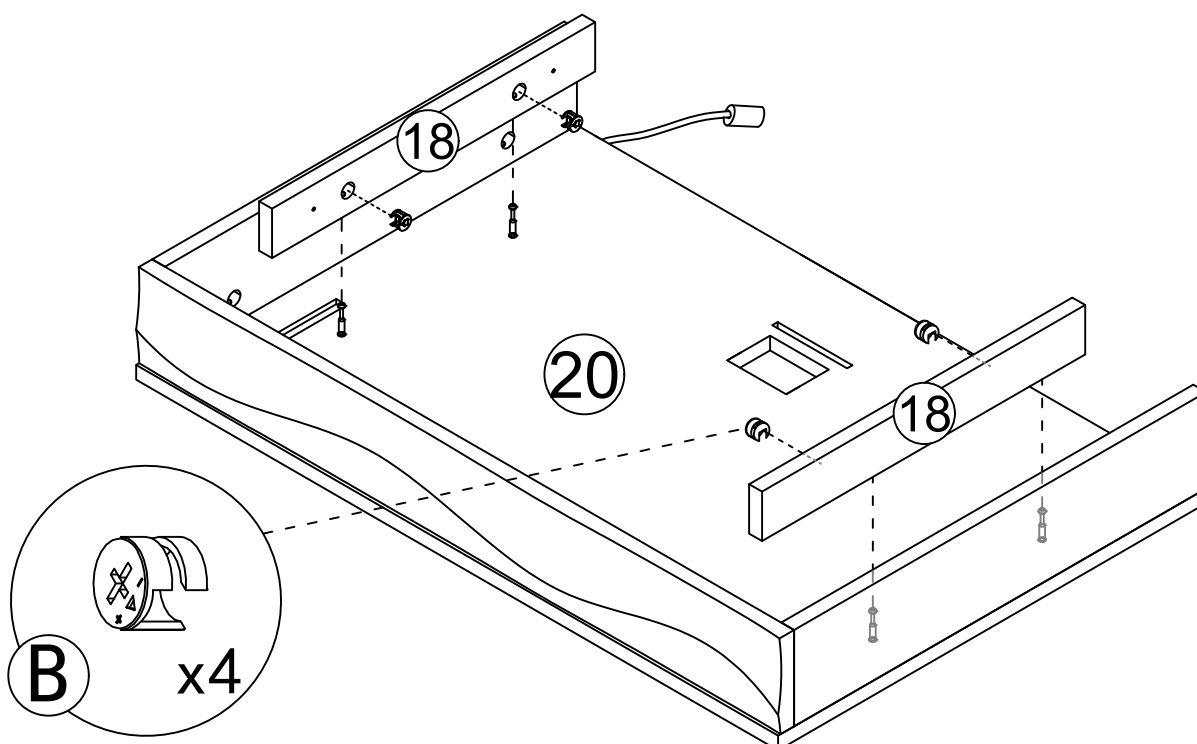

Step 42



(D)



x2




x4

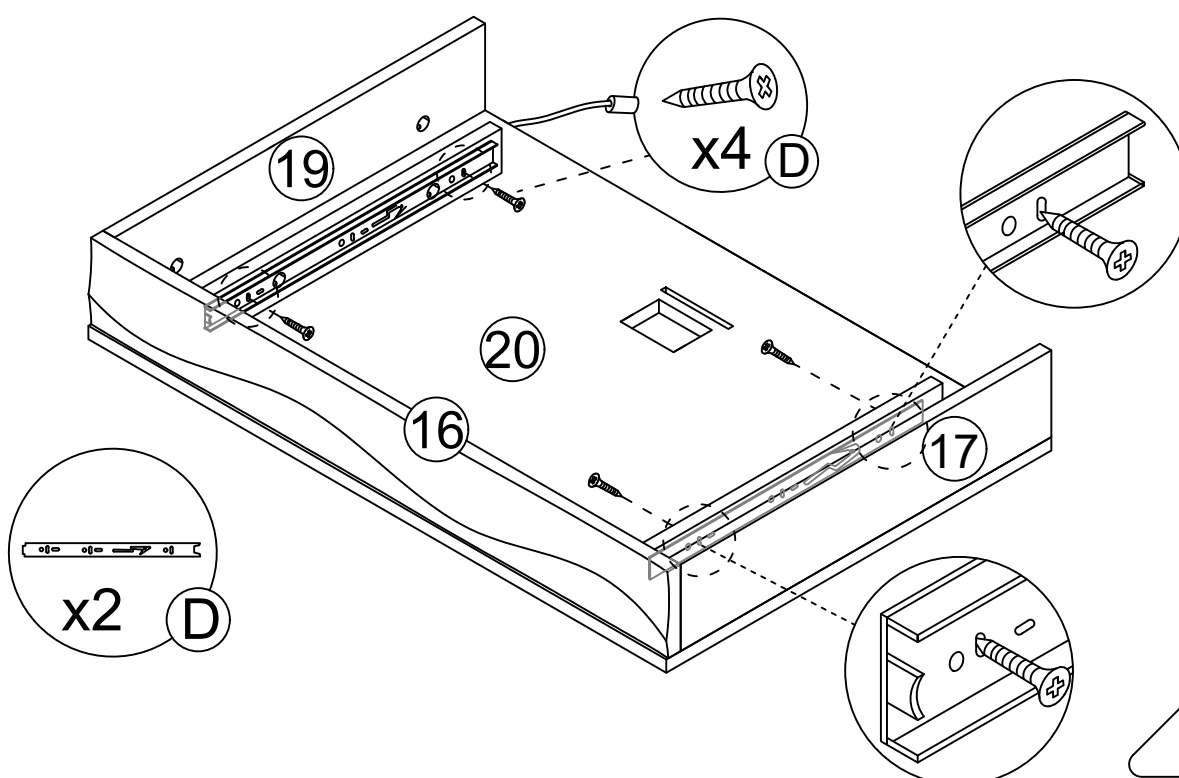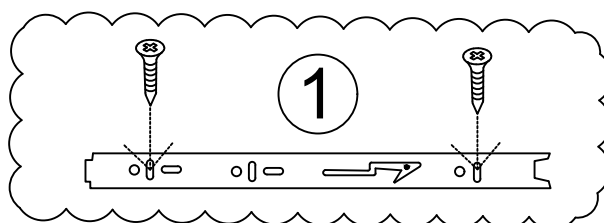


Step 43


D



x2

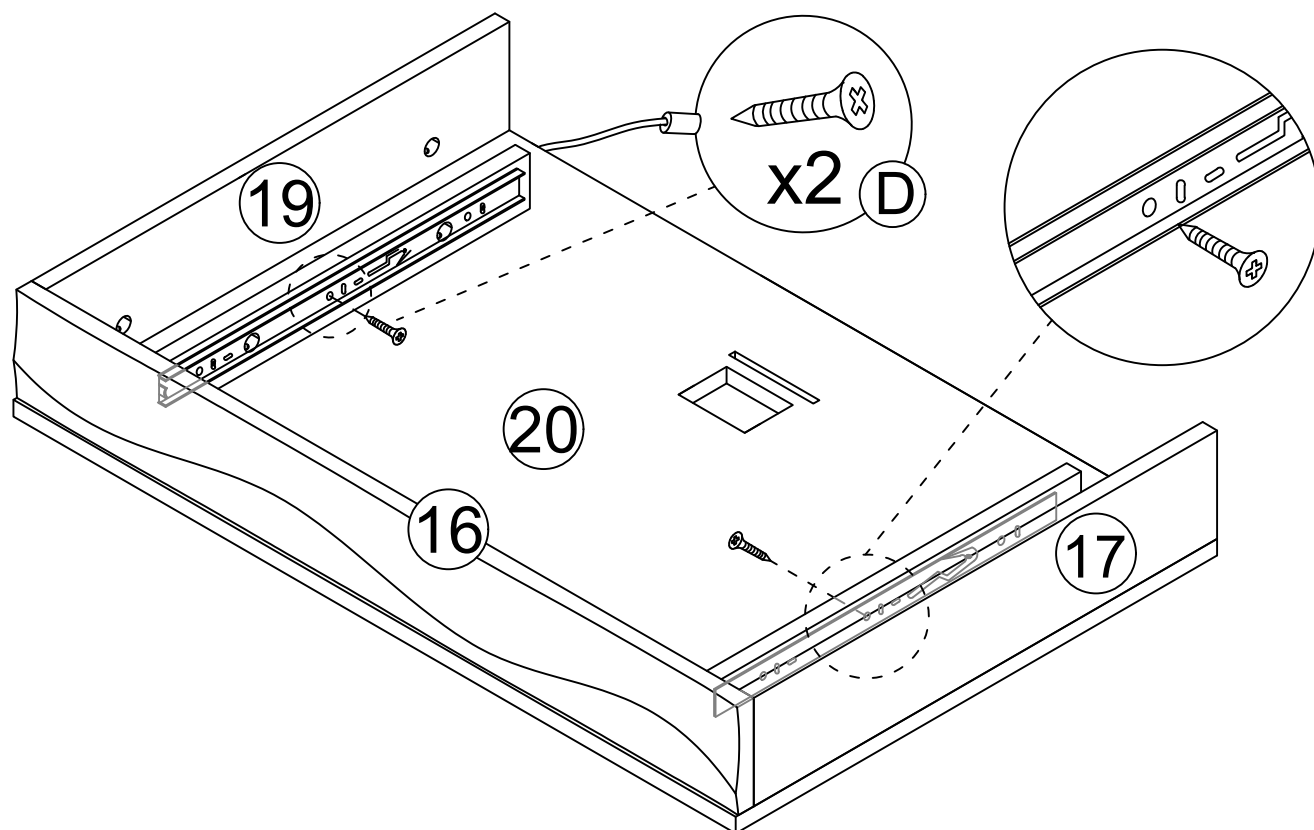


Step 44

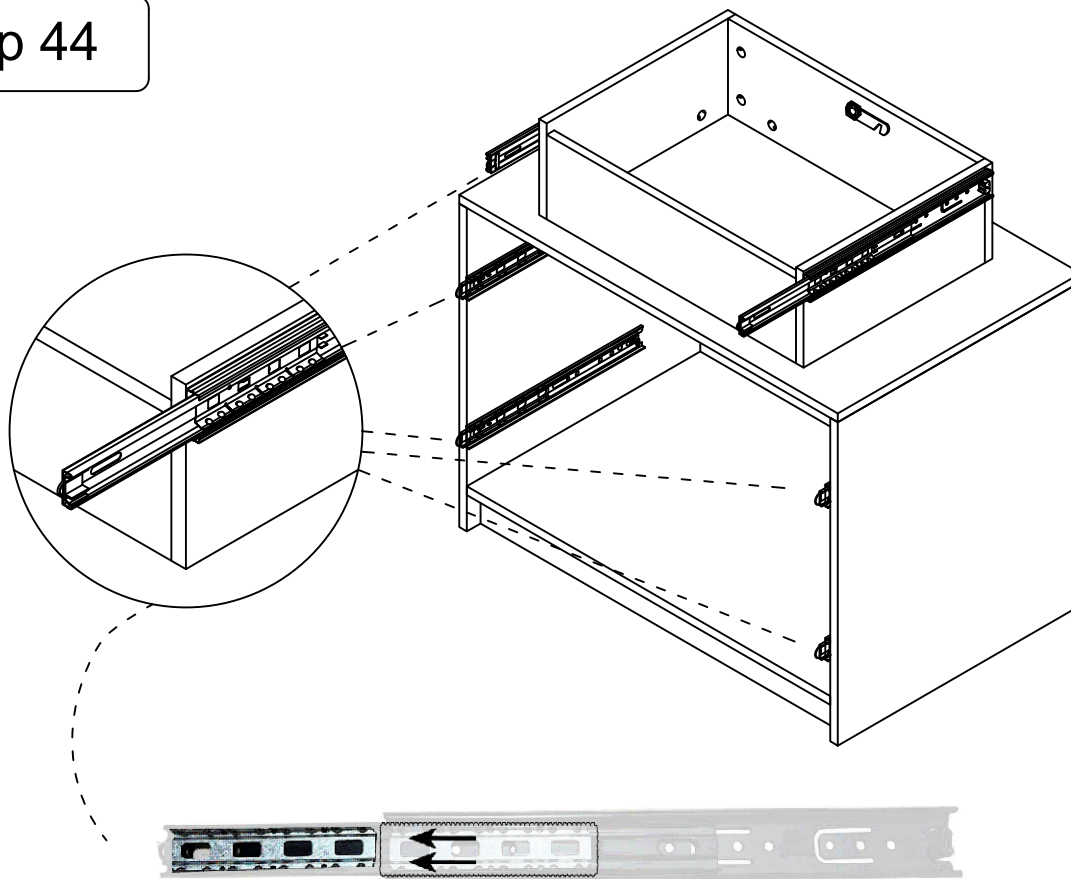

As shown, When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.


Step 45

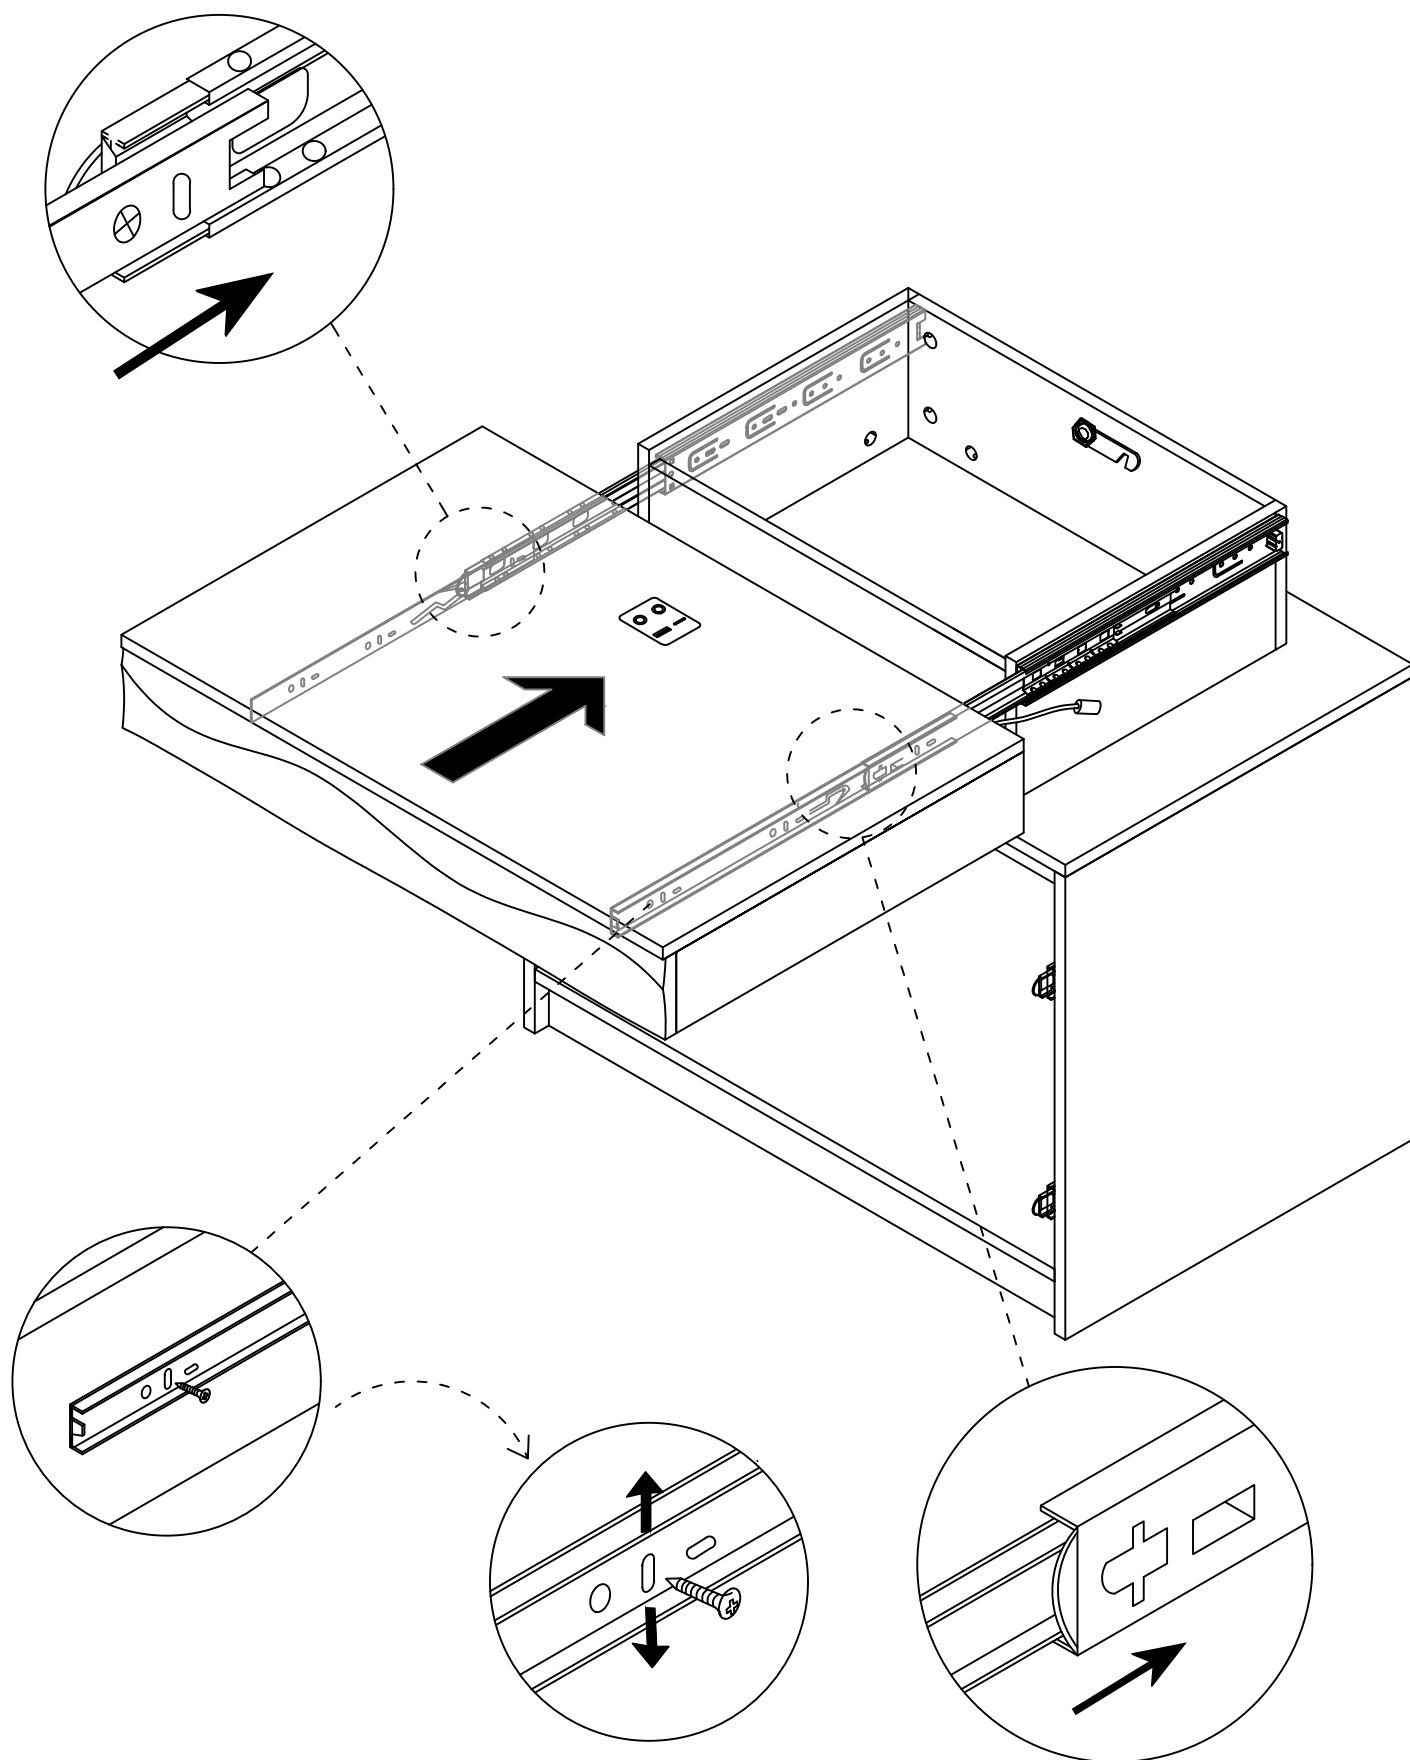

If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap.

Step 46

As shown, When installing the drawer, pull the guide rail out first, Slide beads are also pulled out.

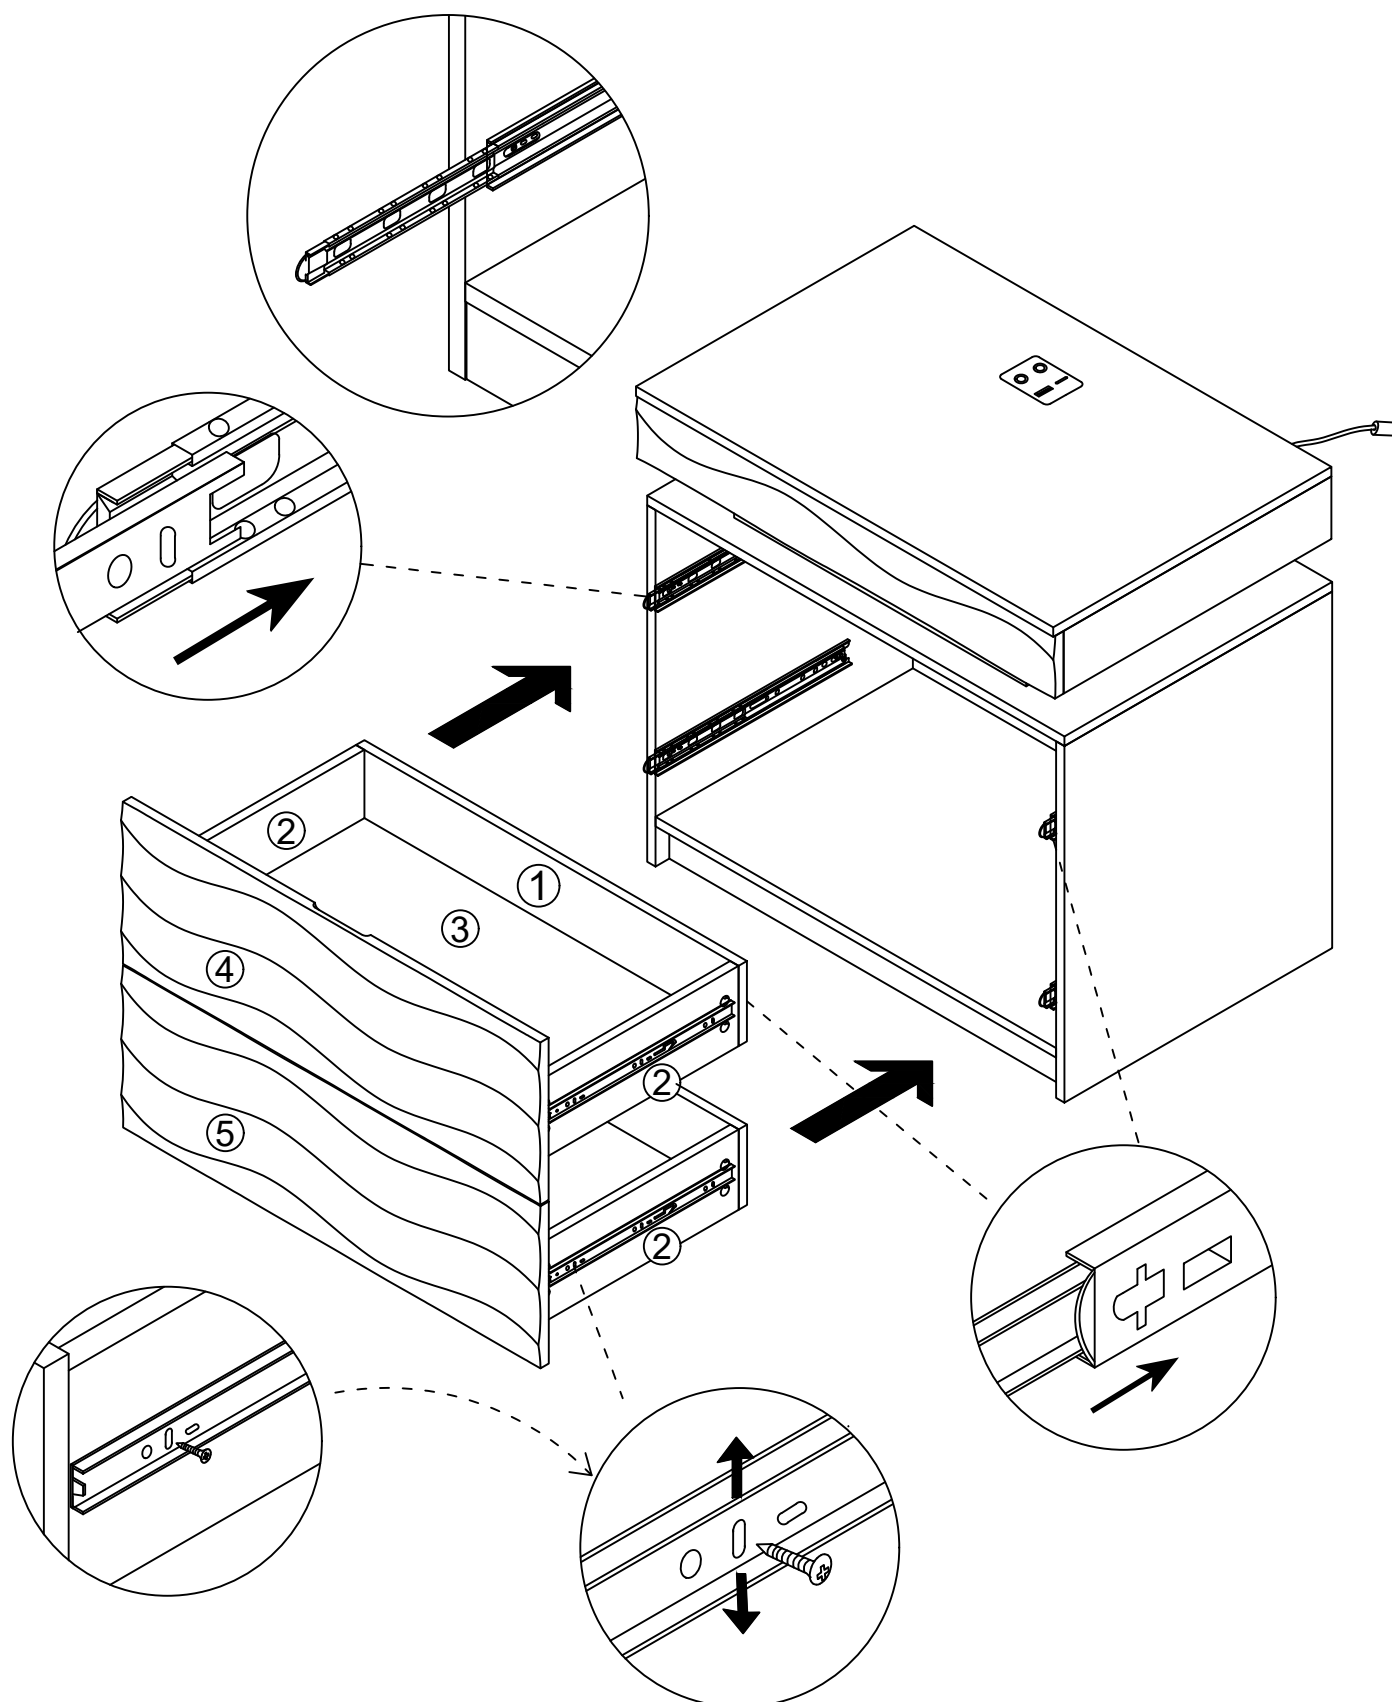


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap.

Step 47

Ⓔ




x4

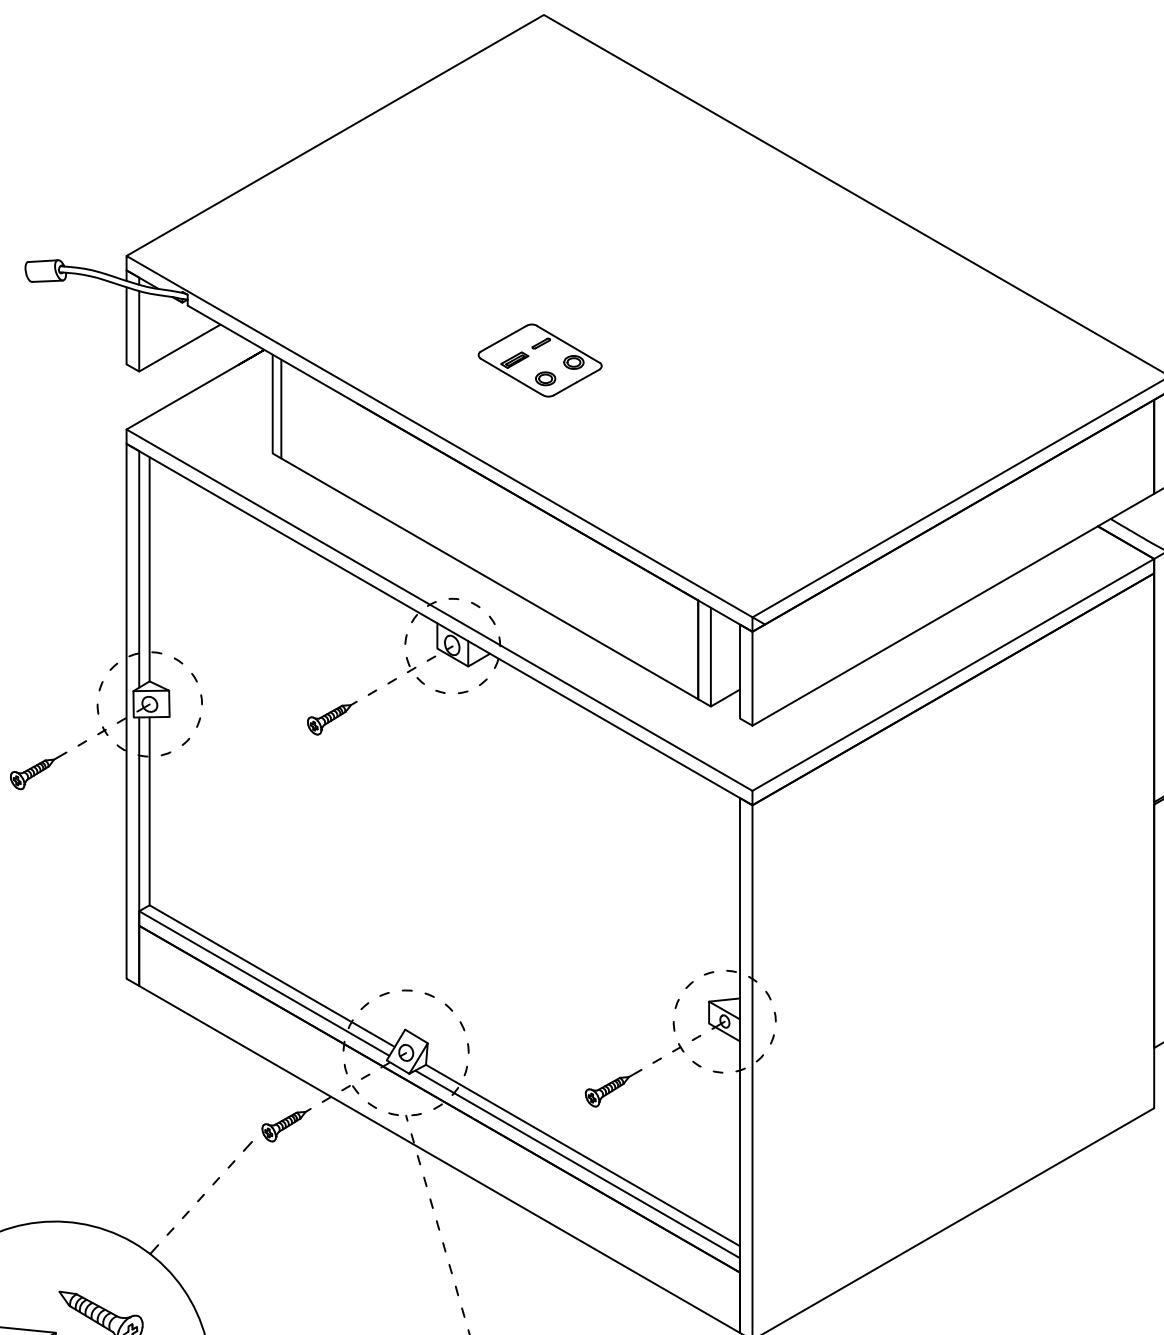


x4


Ⓔ



Step 48



x1

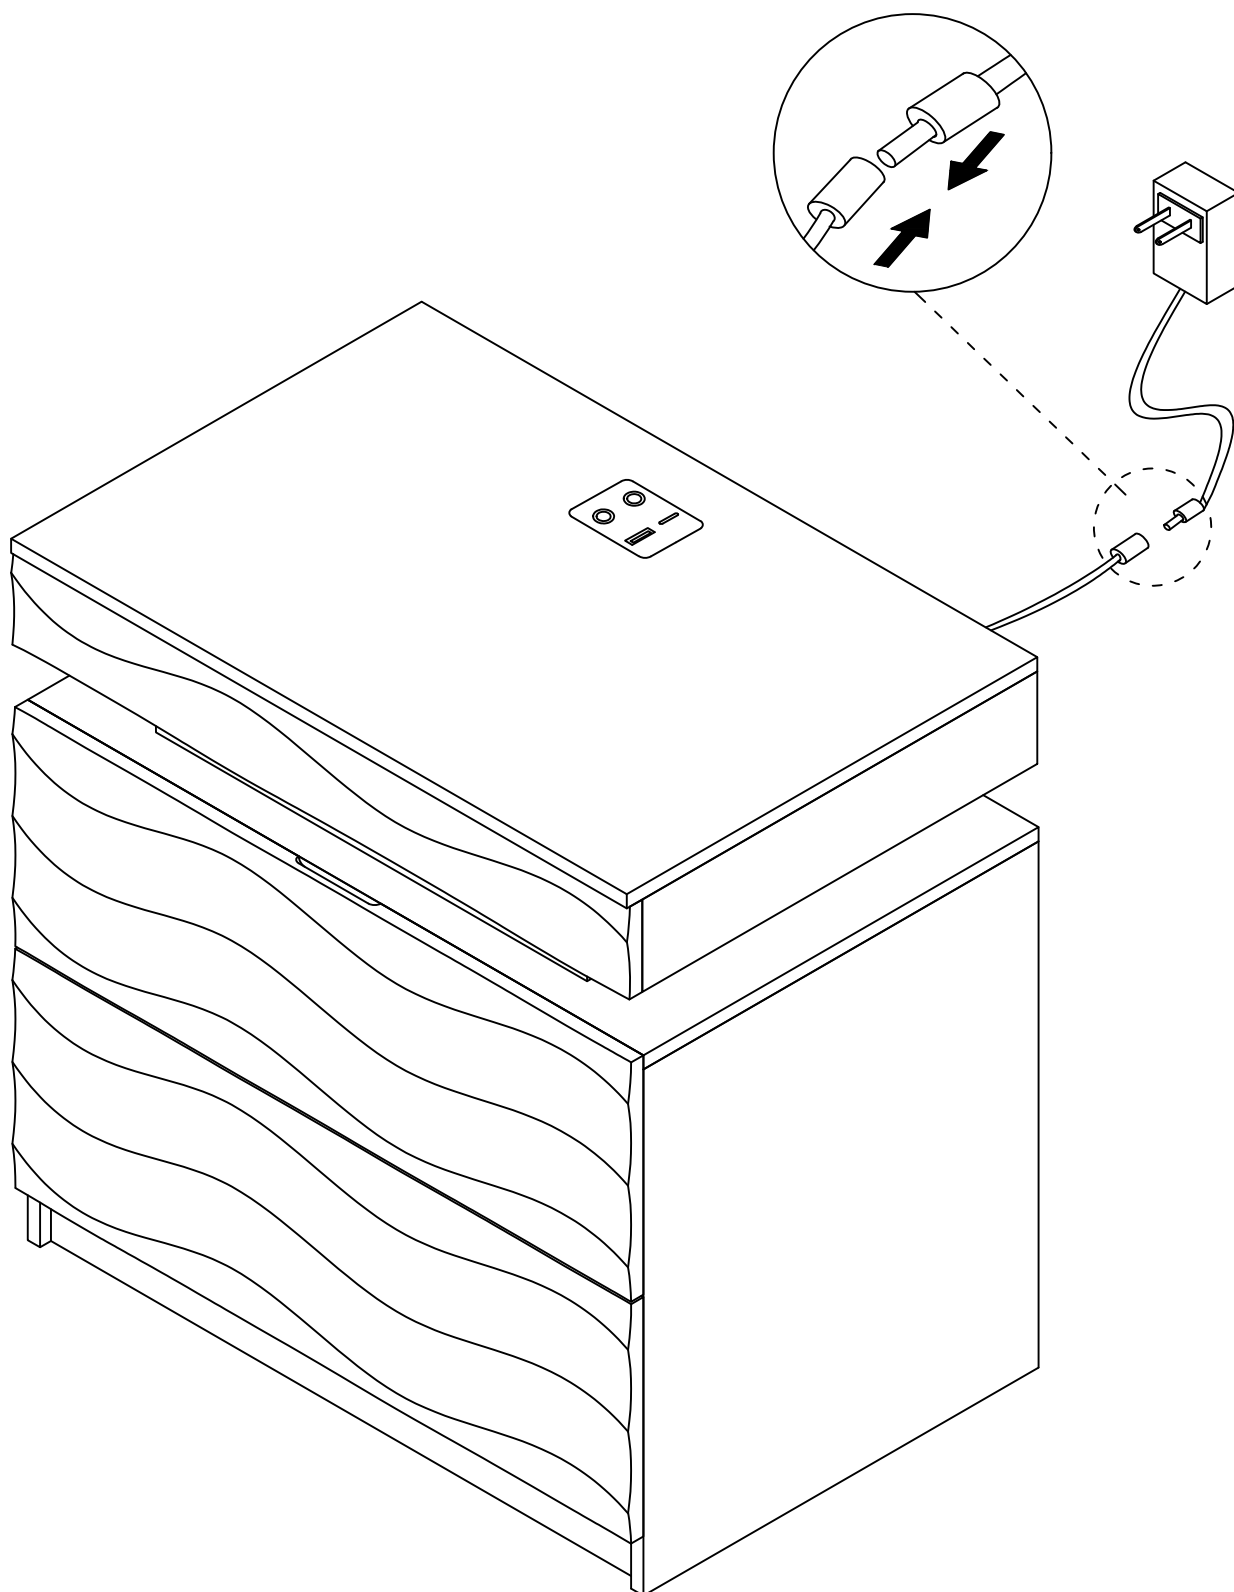


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. It has 1 USB port and 1 type-C port and can distribute the current output up to 5V DC-2A. With 2 touch buttons, it can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

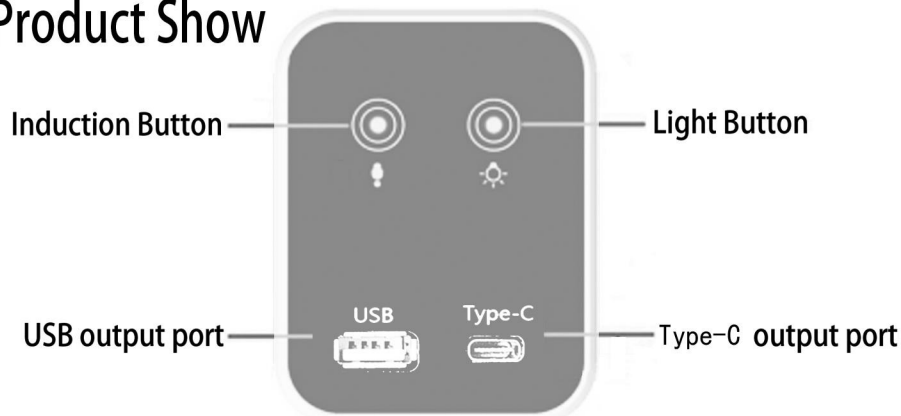

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A . Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B . Long touch to turn off the induction function.

C . Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.