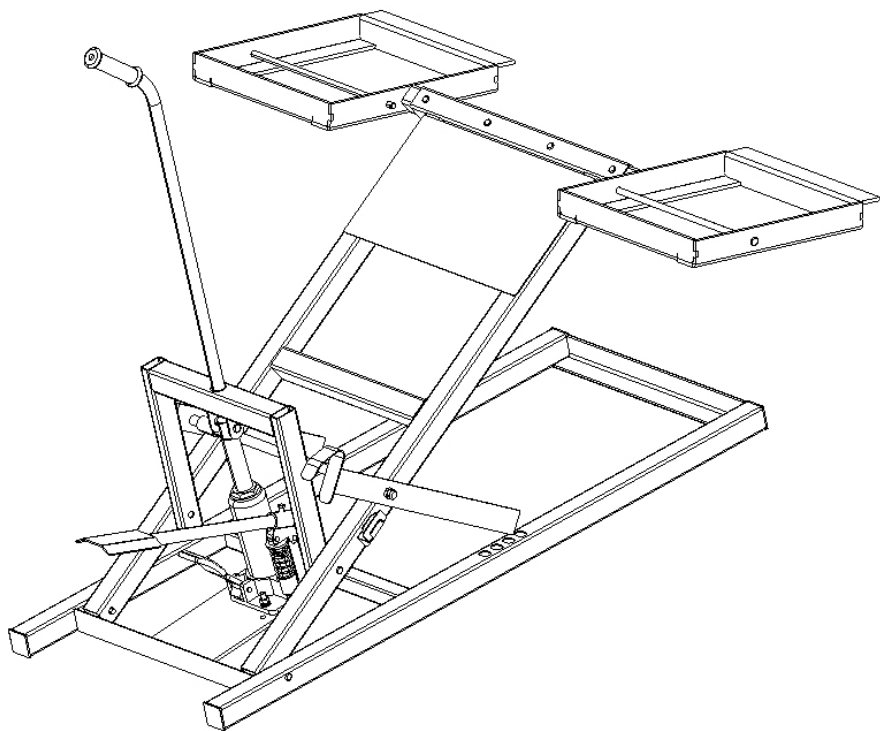


LAWNMOWER

500 lbs

Want more information or assembly tips

Instruction Guide



- Assembly
- Operation
- Maintenance
- Repair Parts

RULES FOR SAFE OPERATIONS

Remember, any power equipment can cause injury if operated improperly or if the user does not understand how to operate the equipment.



LOOK FOR THIS SYMBOL TO POINT OUT
IMPORTANT SAFETY PRECAUTIONS. IT
MEANS -
ATTENTION! BECOME ALERT!
YOUR SAFETY IS INVOLVED








Exercise caution at all times when using power equipment.


1. Read this owner's manual carefully for operating and service instructions before attempting to assemble or operate this equipment. Be thoroughly familiar with the proper use of this equipment.
2. Read the vehicle owner's manual and vehicle safety rules, and know how to operate the vehicle before using this equipment.
3. Children must not be allowed to operate the lift or its accessories, nor should adults who have not received proper instruction be permitted to do so.
4. The attachments on this 'lift' are sharp. Please exercise extreme caution when operating it.
5. No one is permitted to ride on or sit on the lift frame or its attachments.
6. Keep the area of operation clear of all persons, particularly small children and also pets.
7. The vehicle braking and stabil may be affected with the attachment of this equipment. Be aware of changing conditions on slopes. Refer to safety rules in the vehicle owner's manual concerning safe operation on slopes.



STAY OFF OF STEEP SLOPES.




8. Always operate up and down a slope, never across the face of a slope.
9. This equipment should be operated at reduced speed on rough terrain, along creeks and ditches and on hillsides, to prevent tipping and loss of control. Do not drive too close to a creek or a ditch.
10. Do not tow this equipment on a highway or any other public thoroughfare.
11. Follow the maintenance instructions as outlined in this owner's manual.

Accessories and screws


①  1 Pc	②  1 Pc
③  1 Pc	④  1 Pc
⑤  1 Pc	⑥  1 Pc
⑦  1 Pc	⑧  1 Pc
⑨  1 Pc	⑩  1 Pc
⑪  1 Pc	⑫  2 Pcs

A		B		C		D	
M8x35 Hexagon Screw		M8 Nut		Spring washer M8		Flat washer M8	
2 Pcs		2 Pcs		2 Pcs		2 Pcs	


E		F		G		H	
M10 Nut		Flat washer M10		M6x12 Hexagon Screw		M10 x 50 Pin	
2 Pcs		2 Pcs		1 Pc		5 Pcs	

I		J		K		L	
M10 x 75 Pin		M10 x 95 Pin		Type B Pin		Tying Rope	
2 Pcs		2 Pcs		12 Pcs		2 Pcs	

Assembly Tools



Open-end spanner 10-14-1pc




Open-end spanner 17-19-1pc

Assembly Instructions


STEP 1

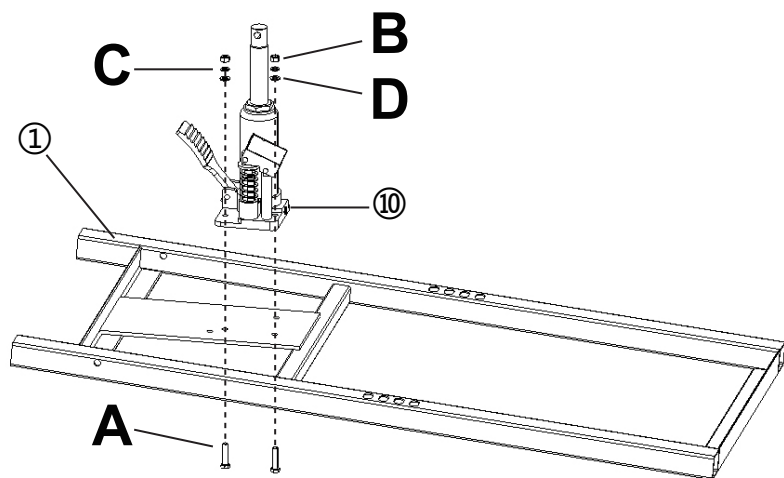所图所示，将①和⑩的孔位对齐，使用配件 A+B+C+D 将其紧固





STEP 2

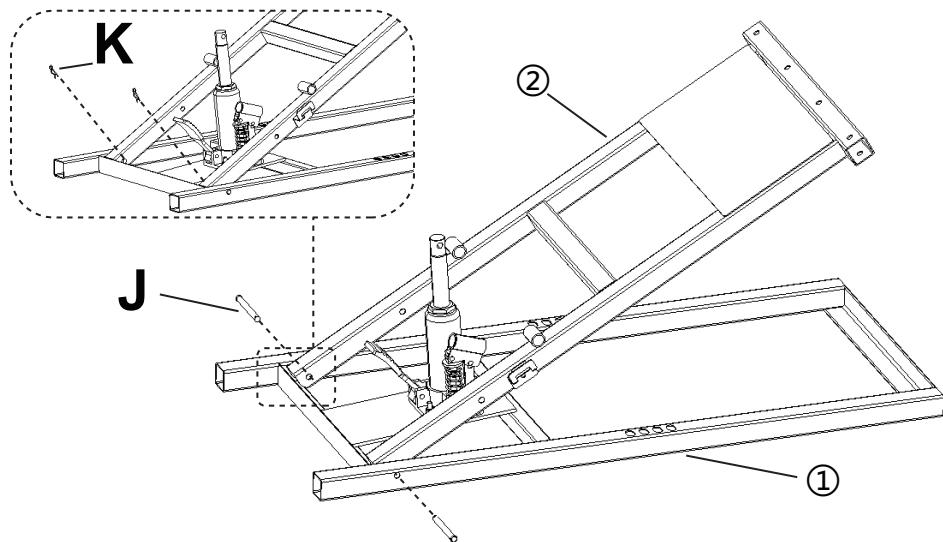将①和②孔位对齐，分别插入配件 J，再用配件 K 将其紧固




STEP 3

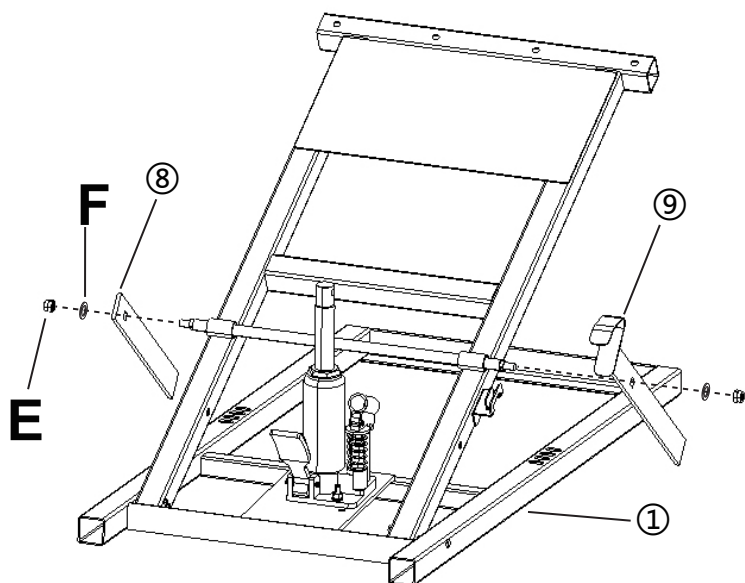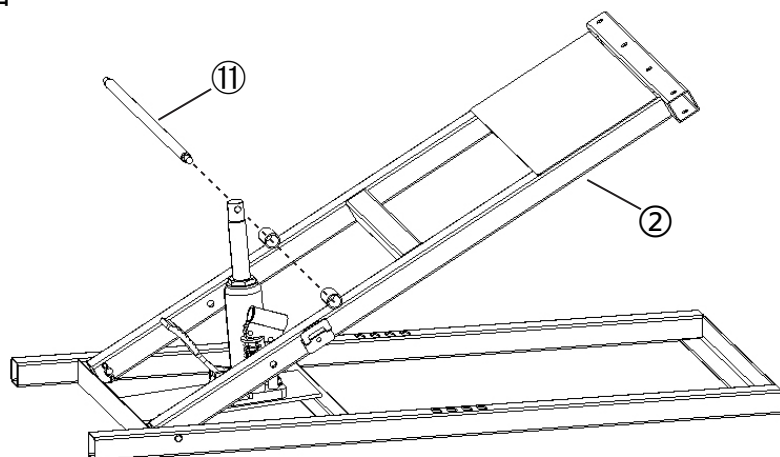所图所示，先将⑪穿入②的两侧圆管，再将⑧和⑨孔位分别对齐⑪两侧并穿入且使另一端插入①至合适孔位，使用配件 E+F 将其紧固



STEP 4

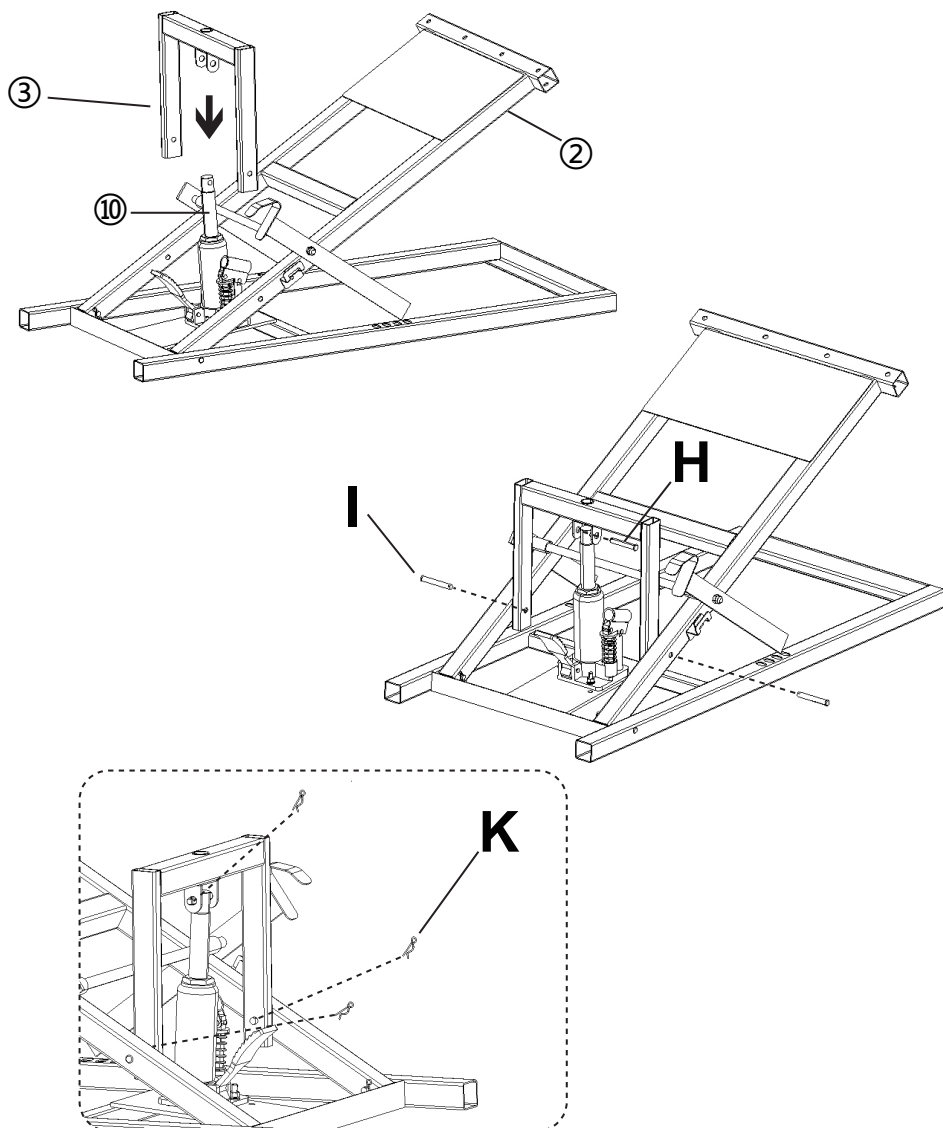
如图所示，将③分别与⑩和②的孔位对齐，并且使用配件 H+K 将③与⑩紧固，使用配件 I+K 将③与②紧固



STEP 5


所图所示，将④插入③圆孔；

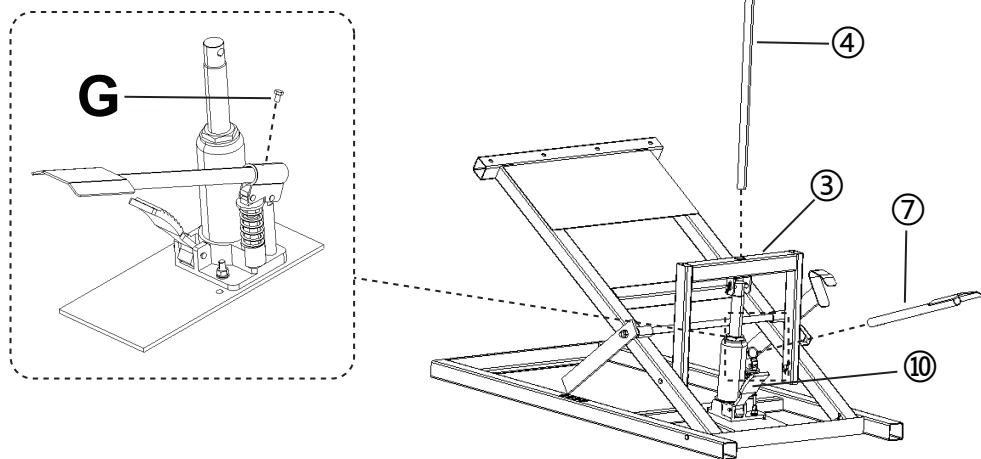将⑦插入⑩的圆管，使用配件 G 将其紧固




STEP 6

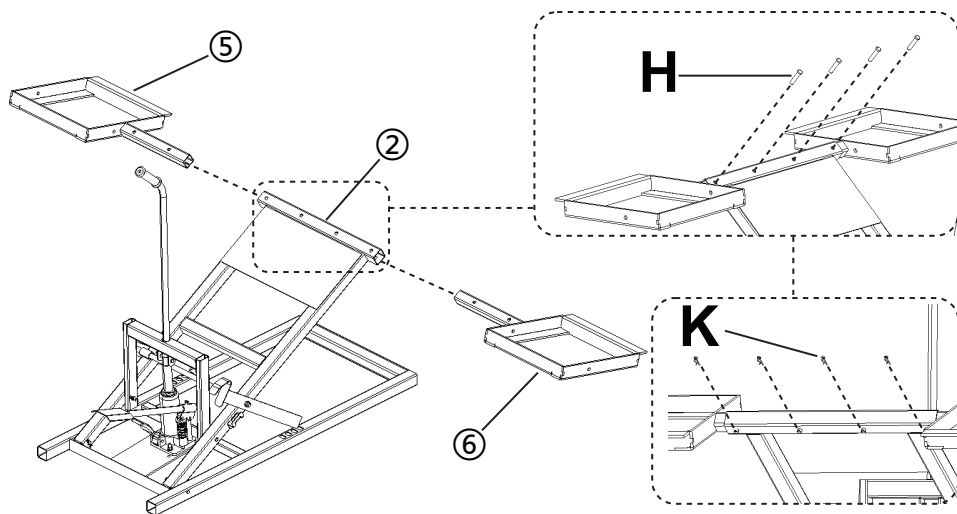所图所示，将⑤和⑥分别插入②，并使用配件 H+K 分别将其紧固



STEP 7

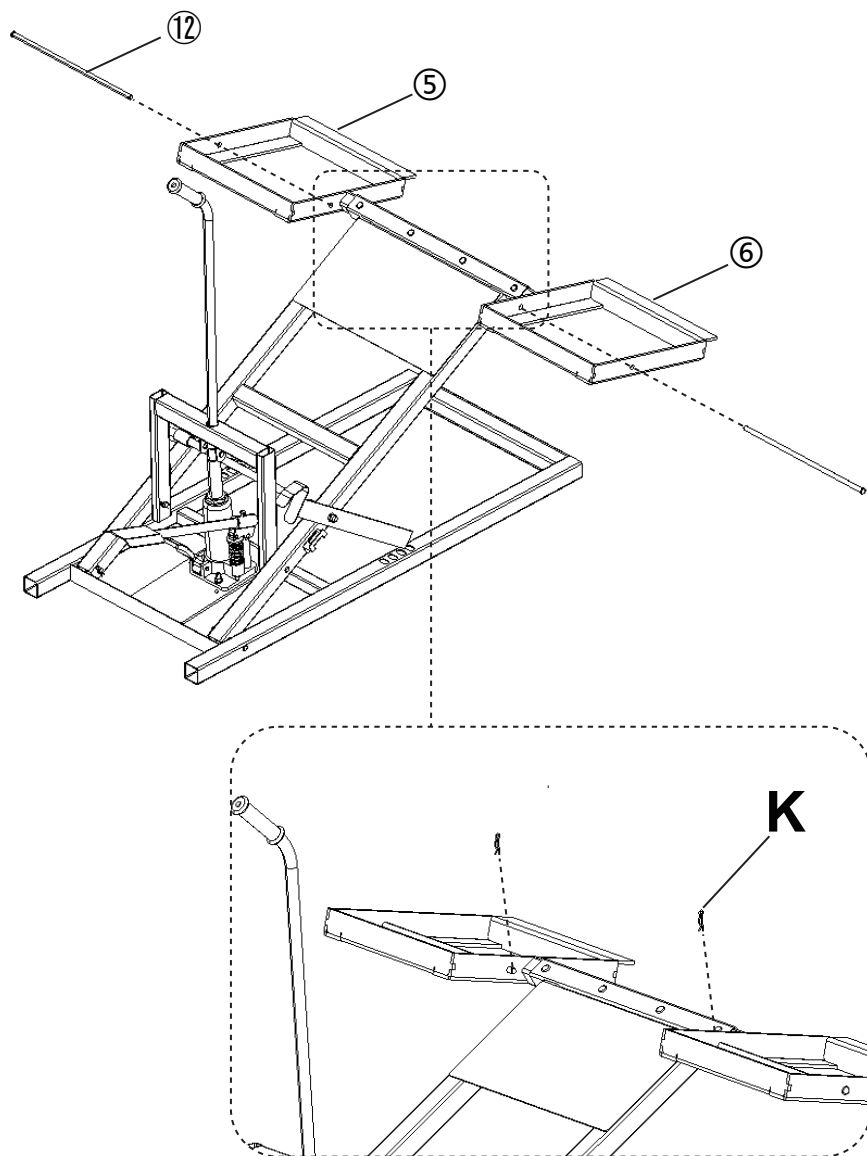将⑫分别从⑤和⑥的两侧孔位插入，使用配件 K 分别将其紧固



HELP CENTER

Support Ready

Do you have questions about your product? We're here to help! Contact us anytime, and we'll provide prompt and effective solutions to ensure your satisfaction.

Fast-Track Resolution

To resolve your issue quickly, please attach pictures of the product or any relevant parts when you contact us. This helps us better understand the issue and provide the most effective support.

Our Commitment

Your trust is our priority, and we're committed to making your experience seamless and enjoyable.