


80079 Product Installation Instructions

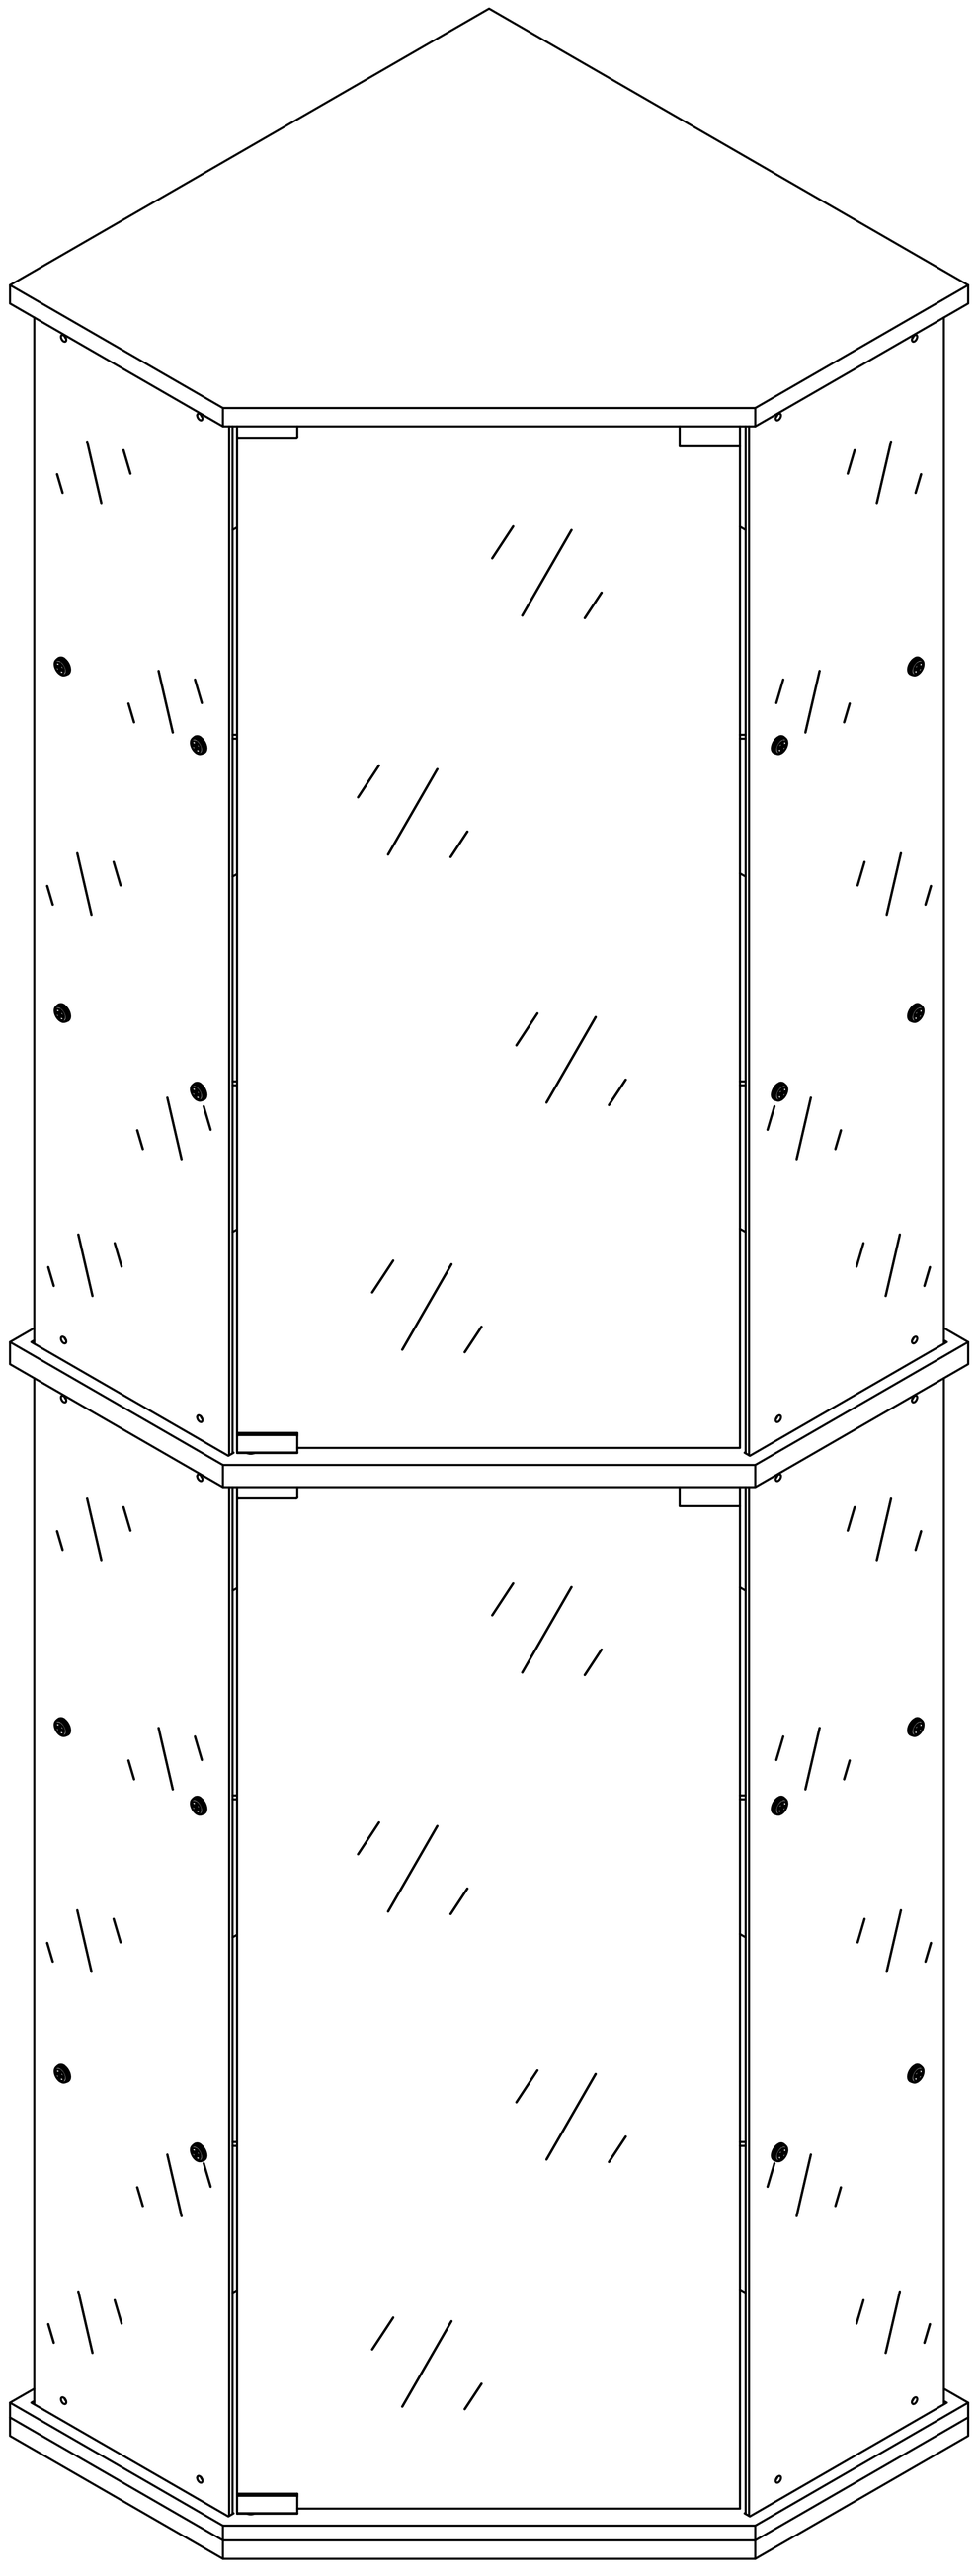


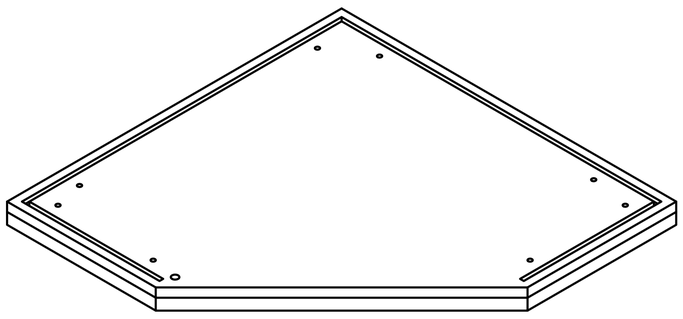


Ax1

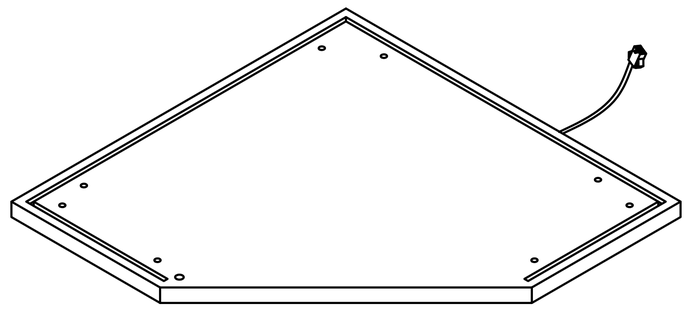


Bx1

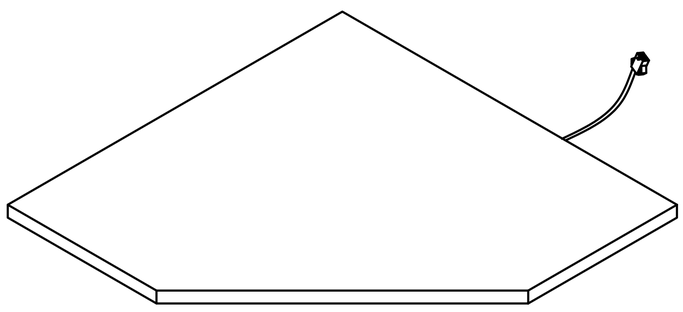


Cx1

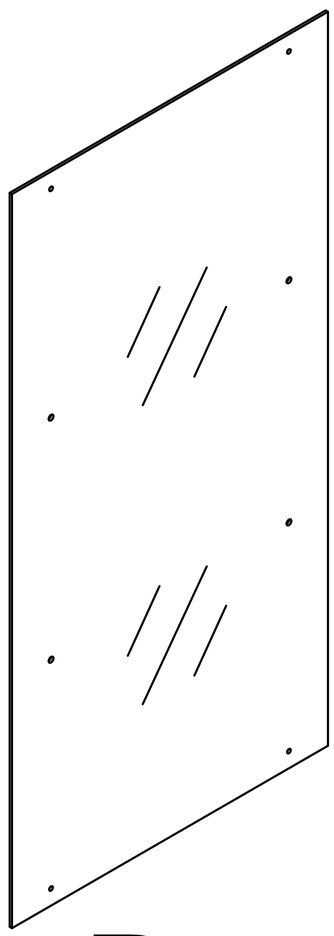


Dx2

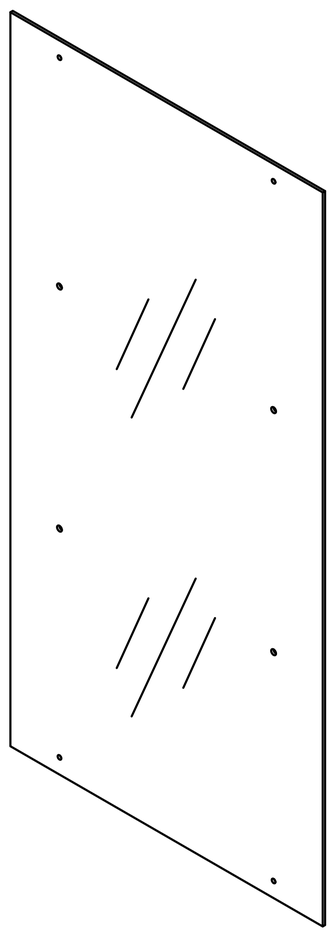


Ex2

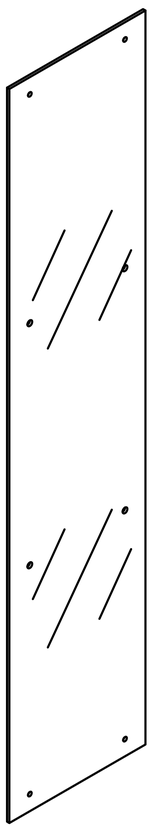













Fx4

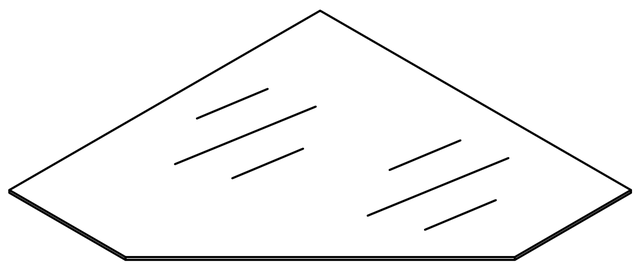


Gx4

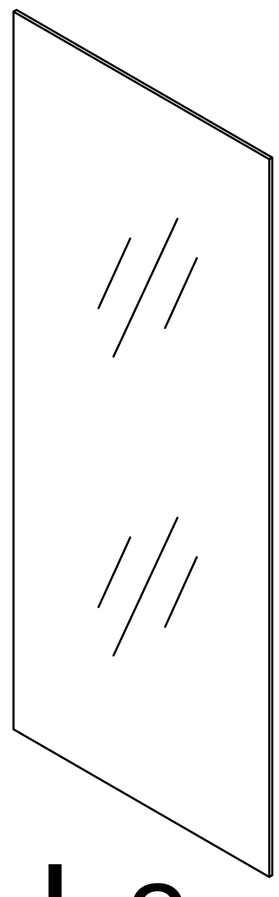


Hx2

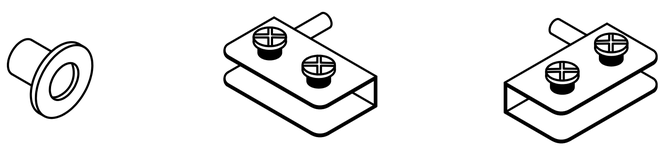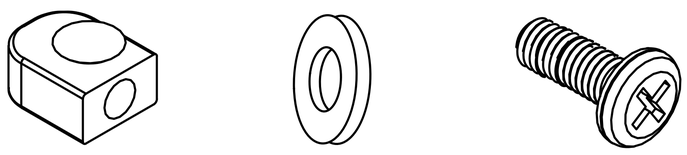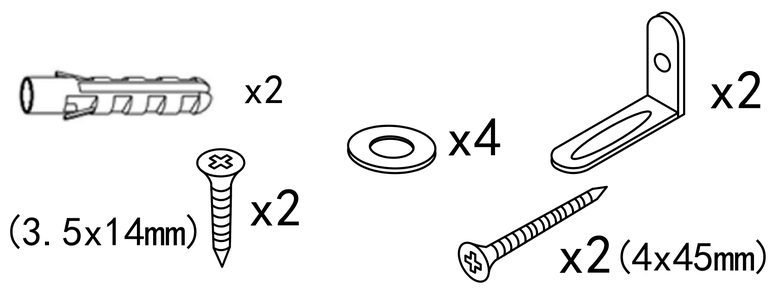①		Non-slip pads (24x24mm)	4pcs +2pcs
②	  	Corner Bracket,Screw (4x8mm)	32pcs +2pcs
③		Screw (4x8mm)	32pcs +2pcs
④	 	Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Hinge	2pcs
		Iron sheet	4 pcs / 2 pcs / 2 pcs
⑤		Laminate Support Nail& Screw (6x16mm)	32pcs +2pcs
⑥		Wire clamp	3pcs +1pcs
⑦		Double end connecting line	1pcs
⑧		LED Strip Controlle	1pcs
⑨		Anti Fall Hardware	1pcs


AC/DC Adapter (12V ⎓ 3.0A)

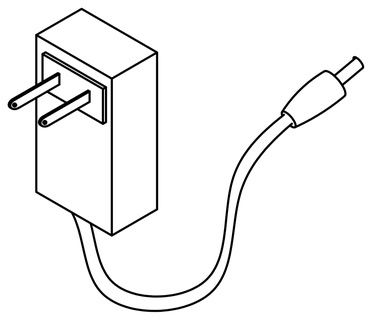

1pcs

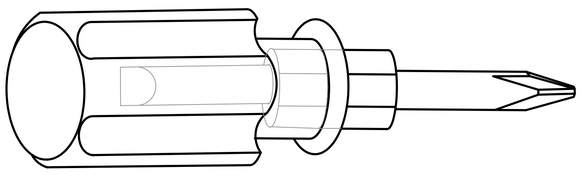


1pcs

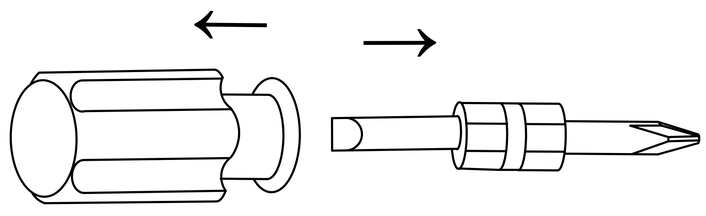



Double-head screwdriver, use as required

Product structure decomposition

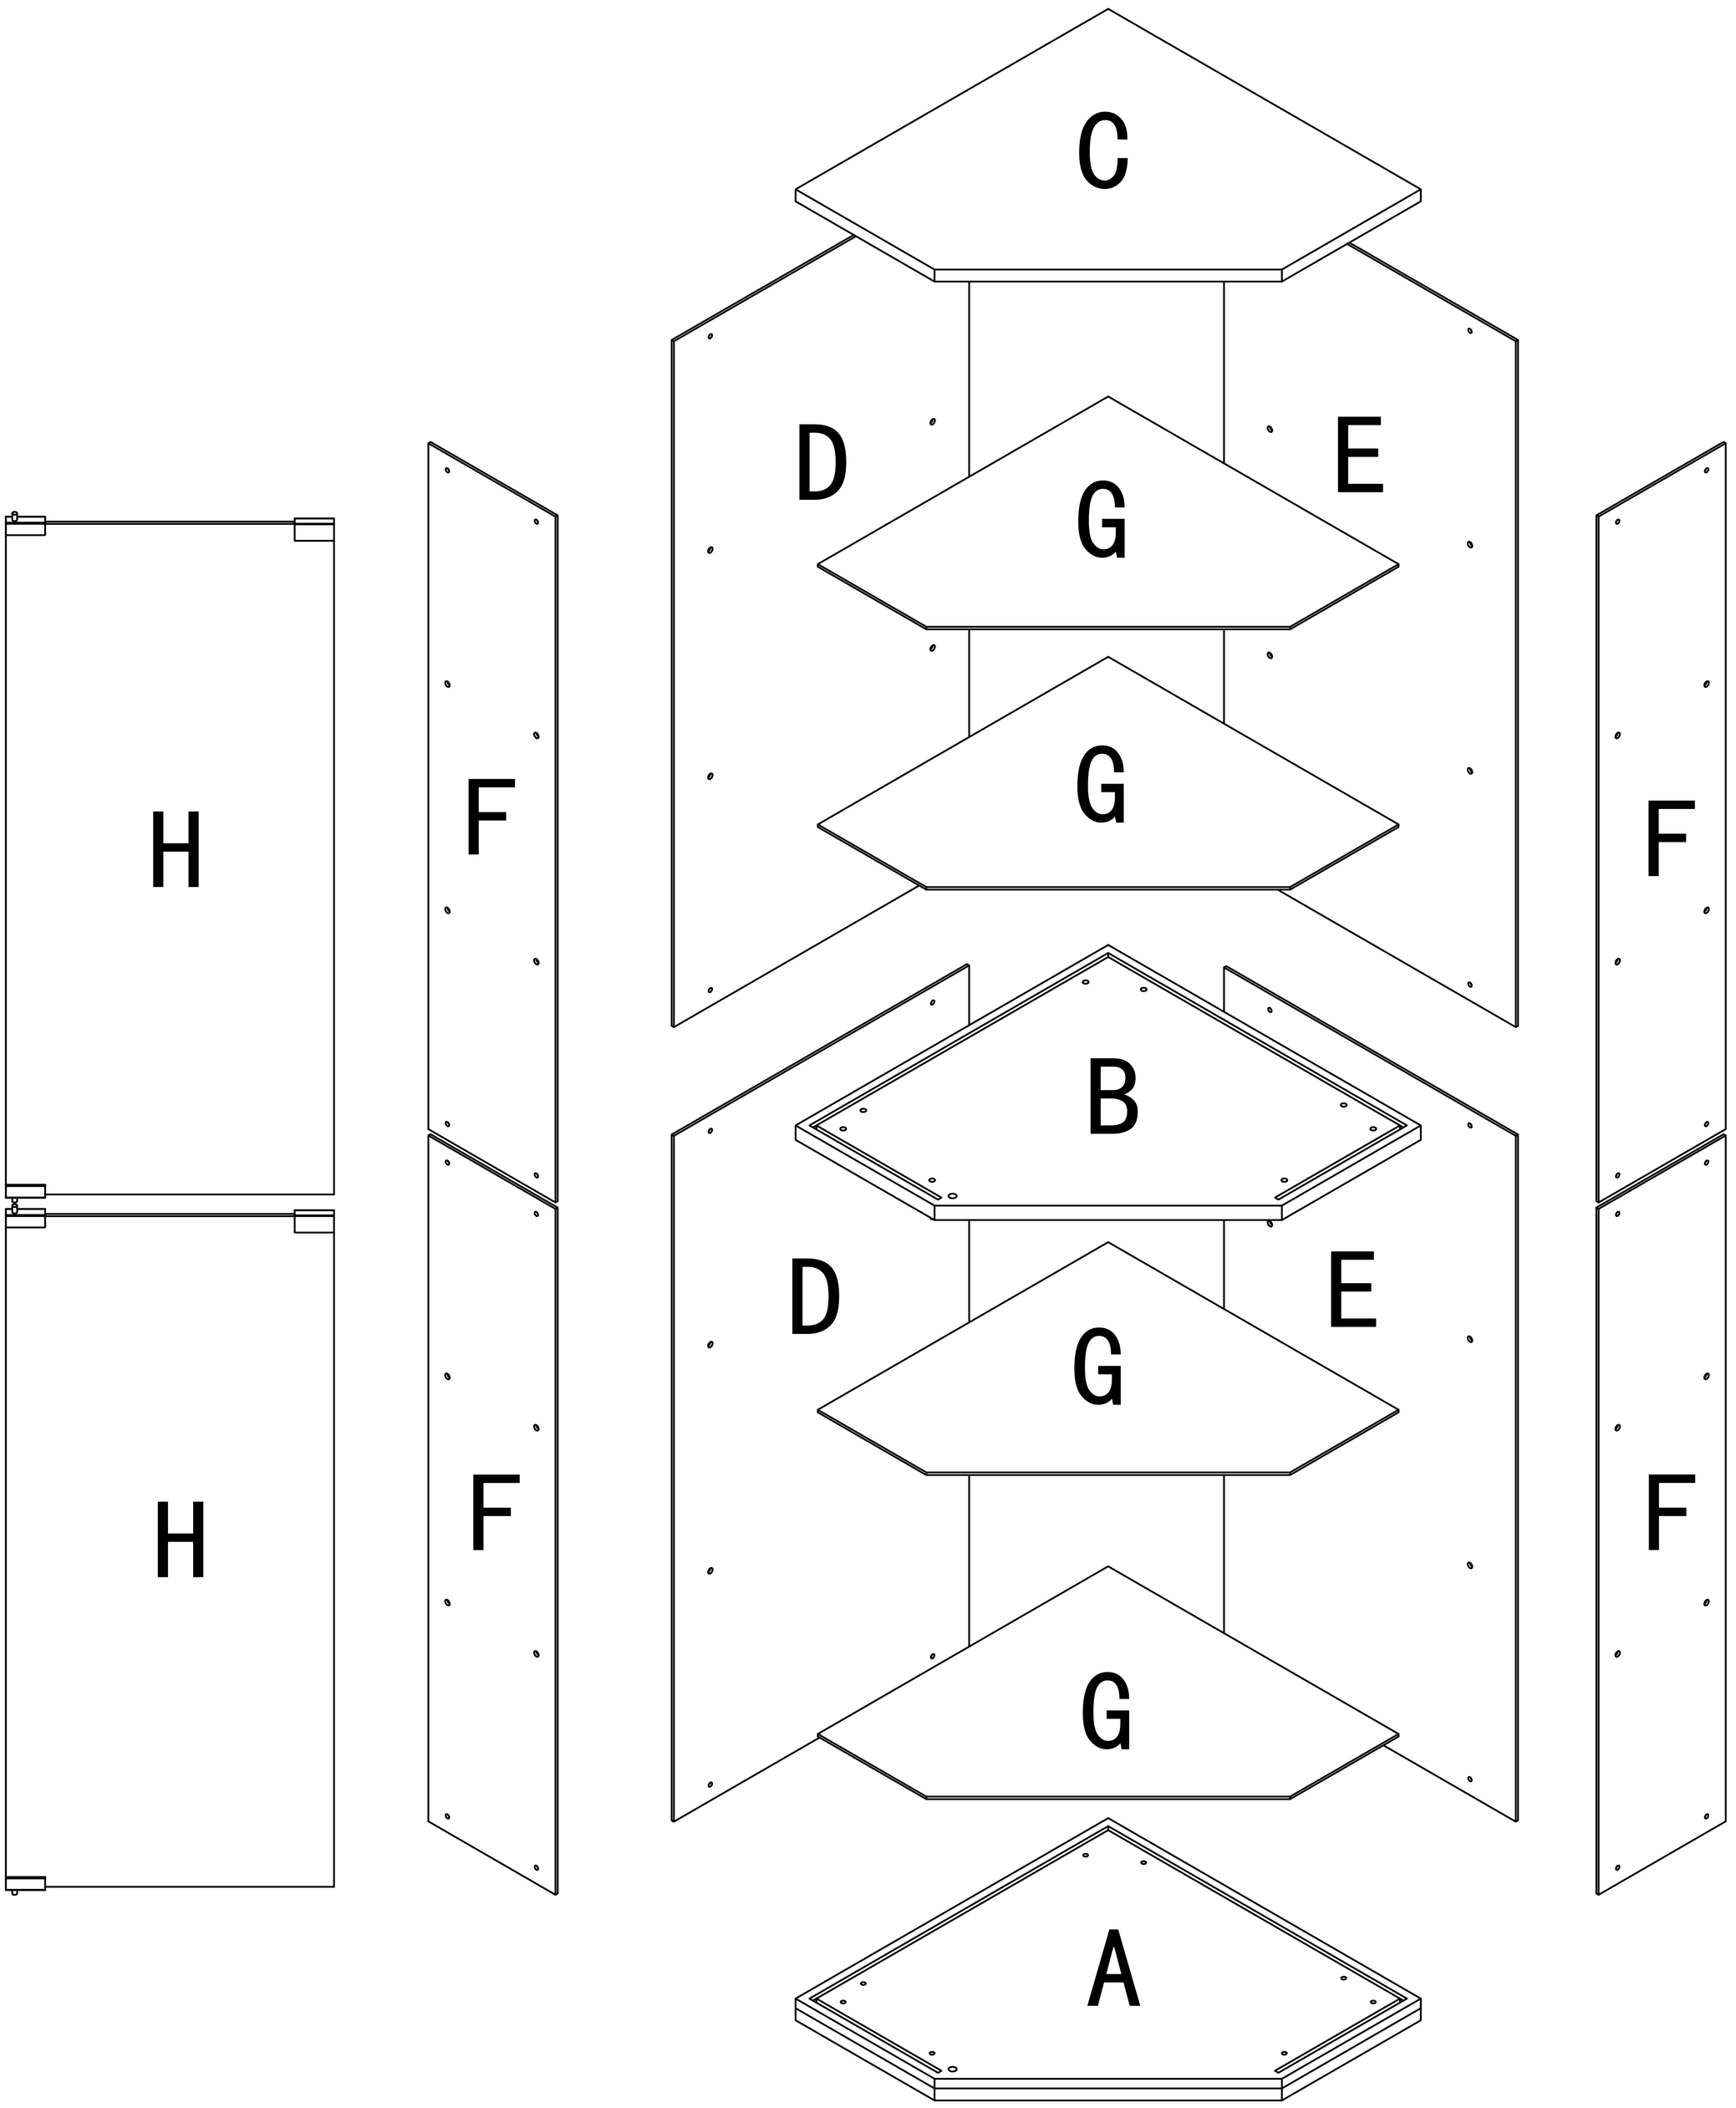

Step 1

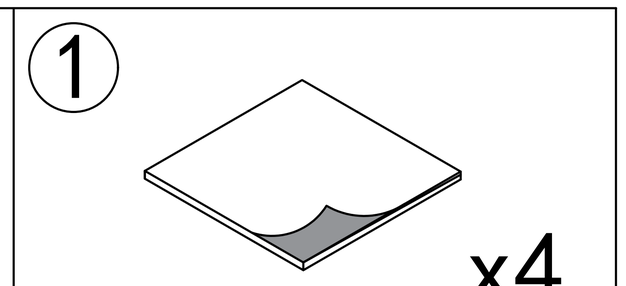


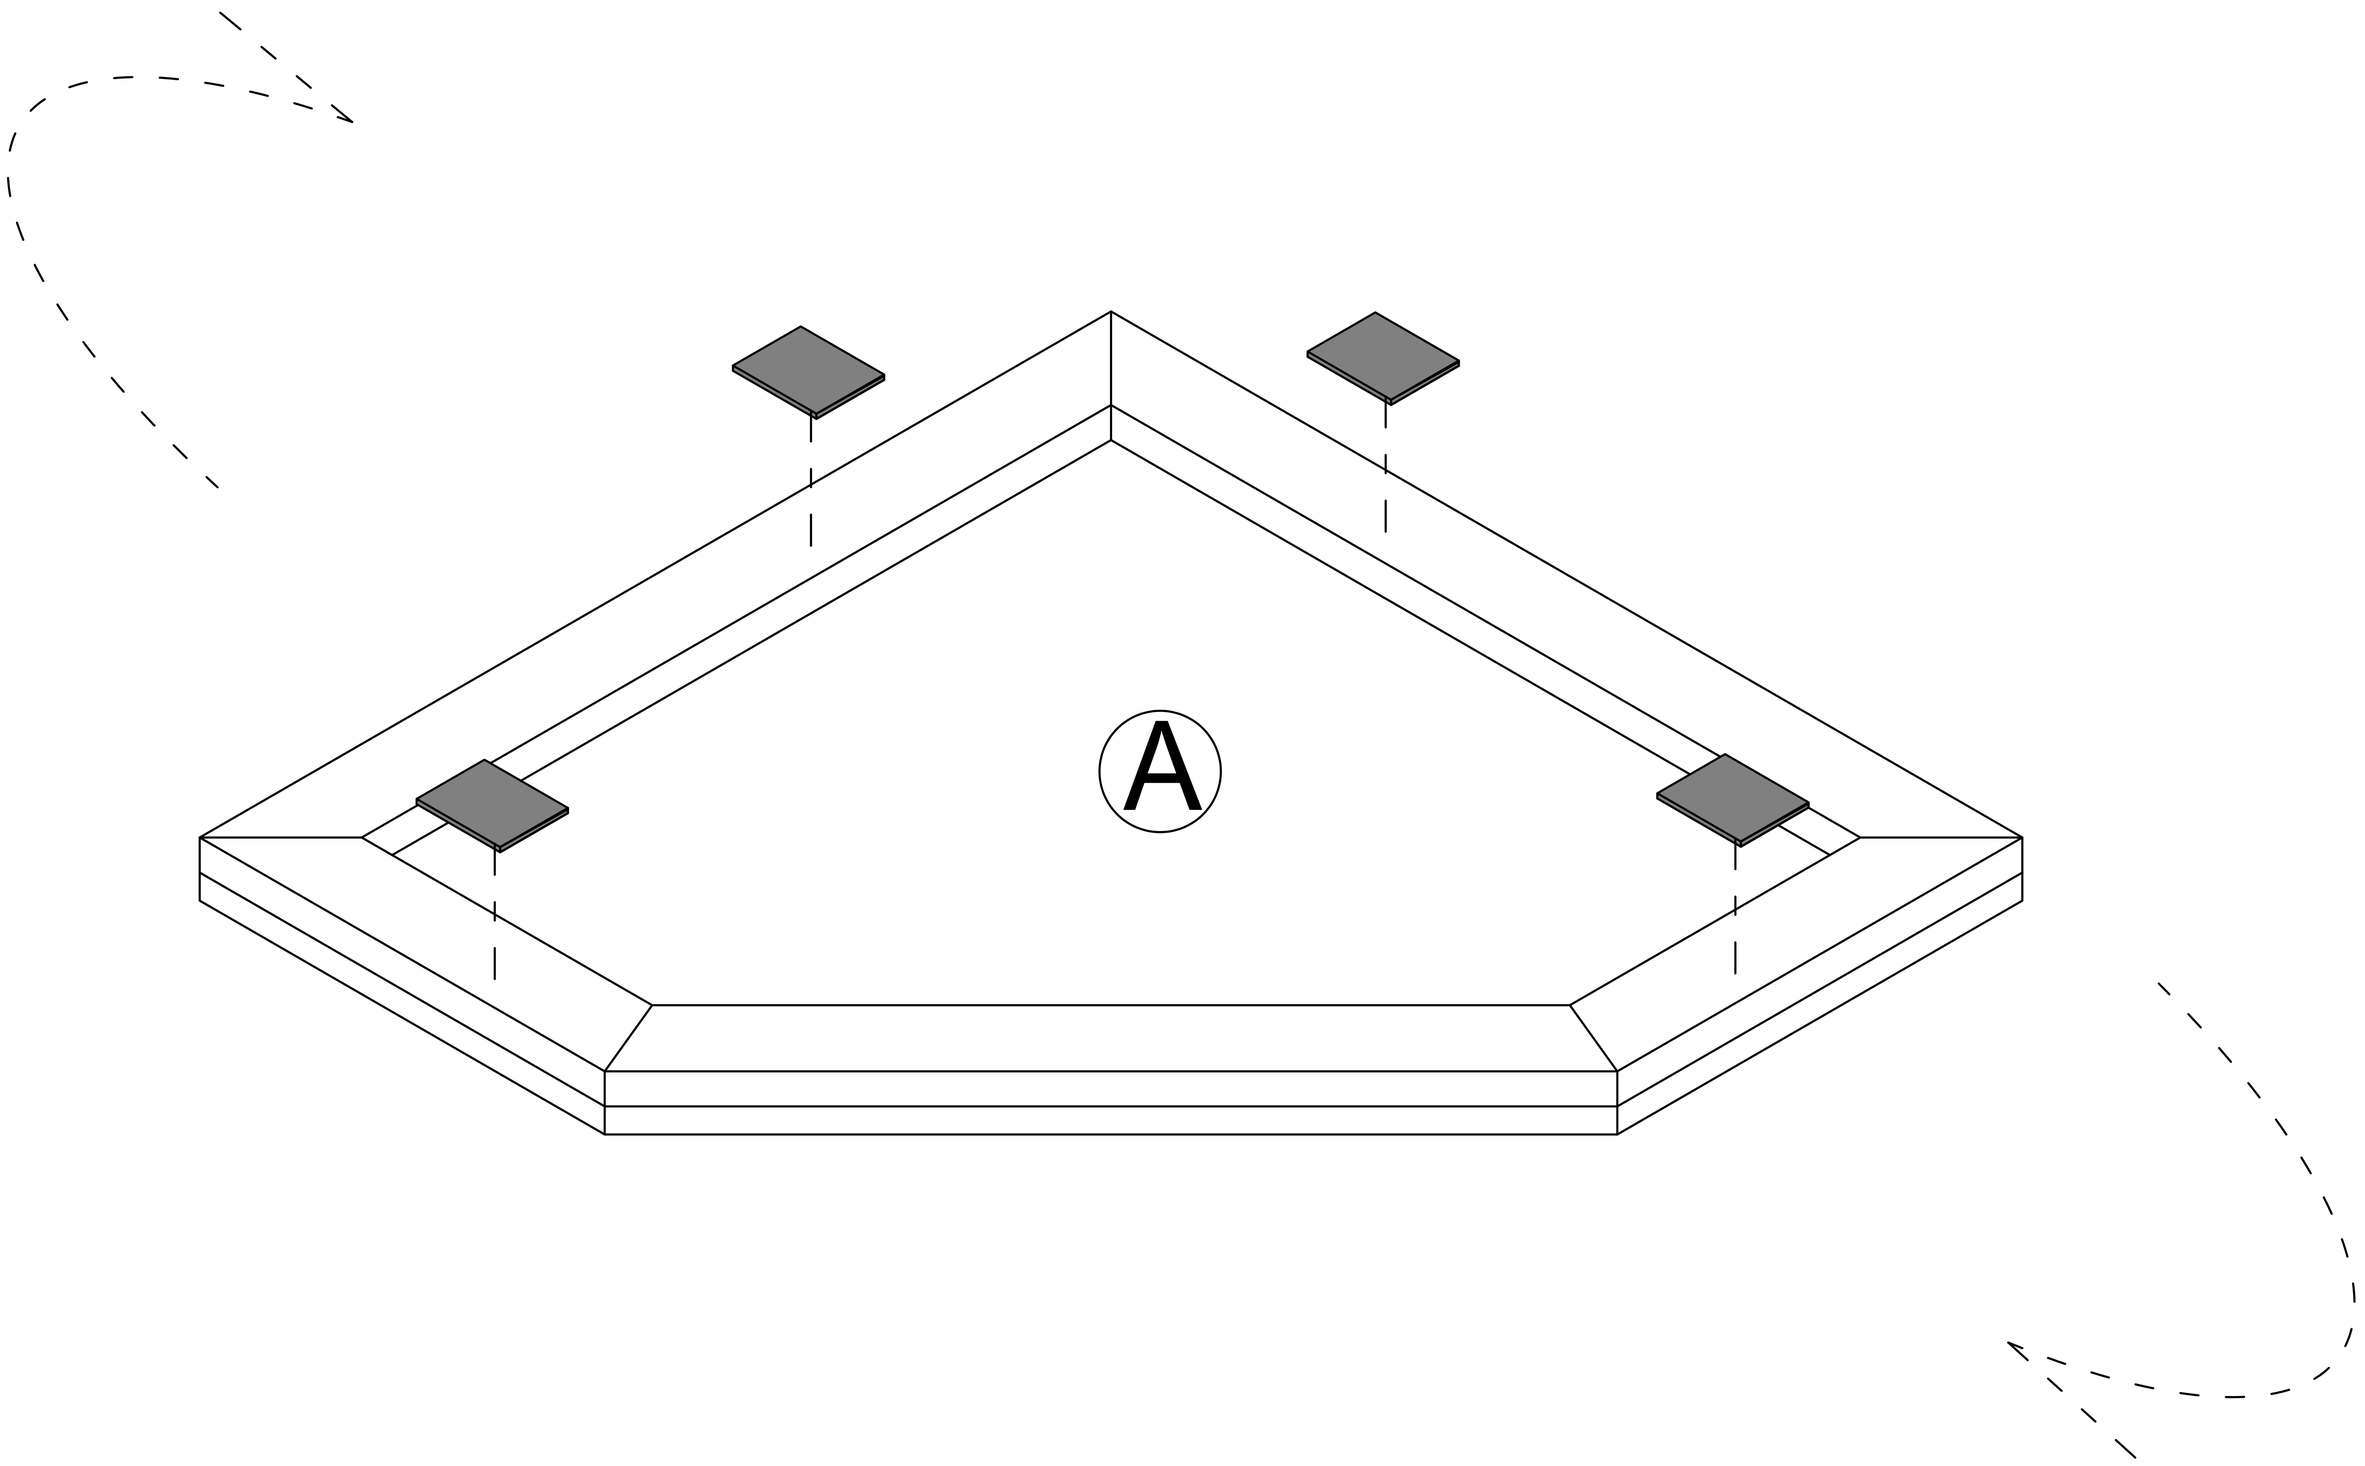

Tear off release paper and stick
the black foot pad on the board


Step 2


② x8	③ x8

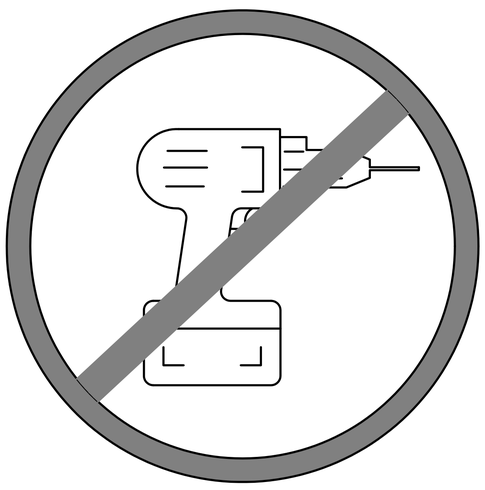


Prohibited: Electric screwdriver use.


Do not fully tighten the screws.

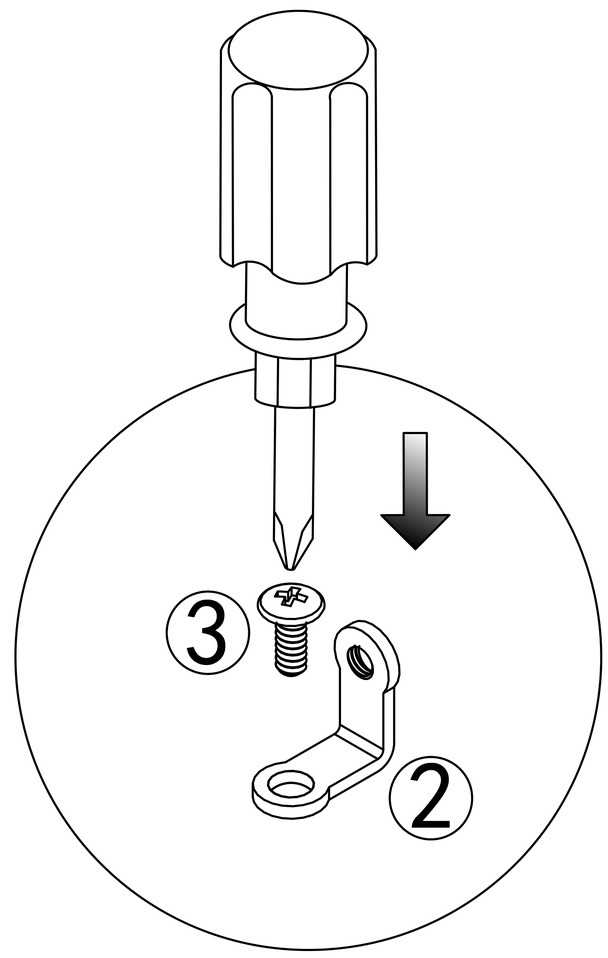

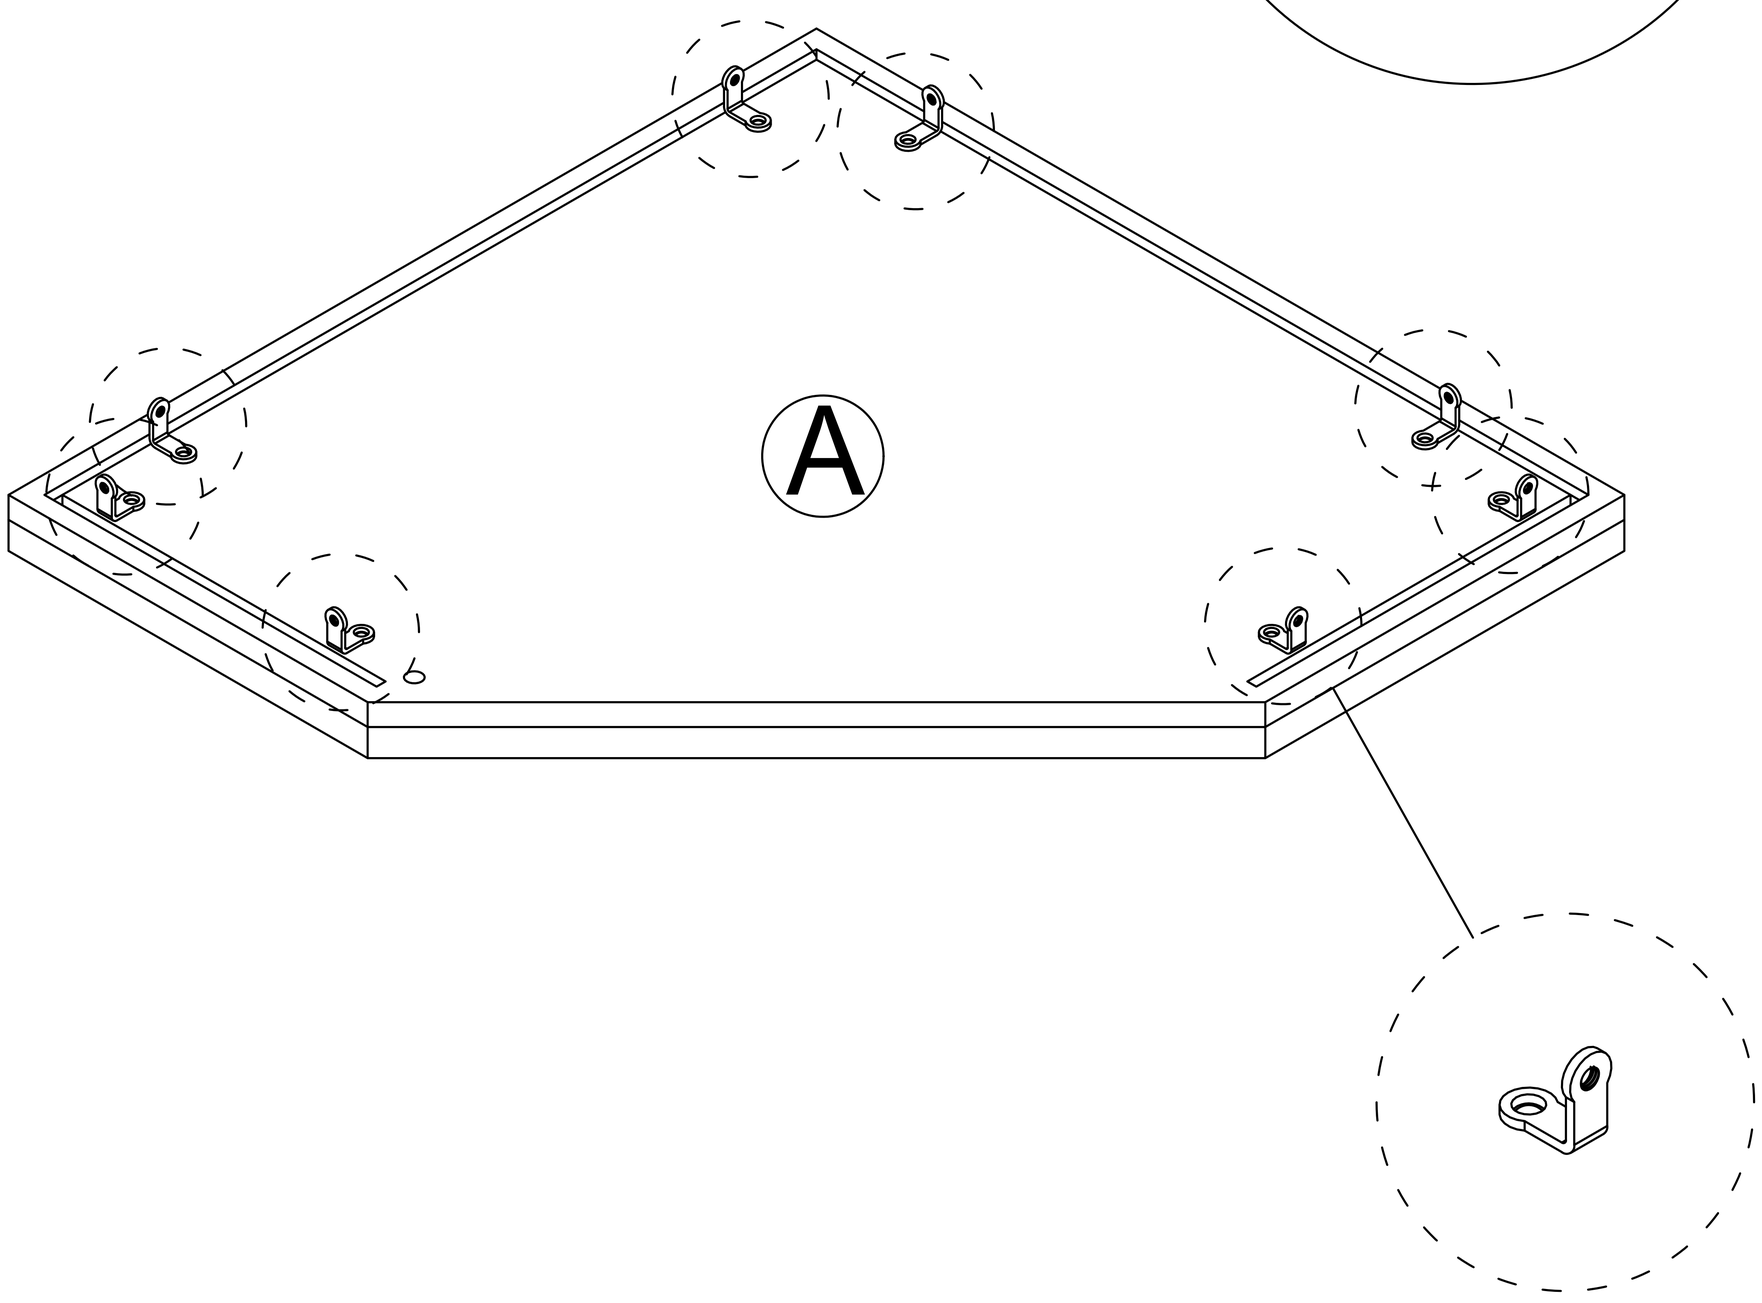



Install this hole

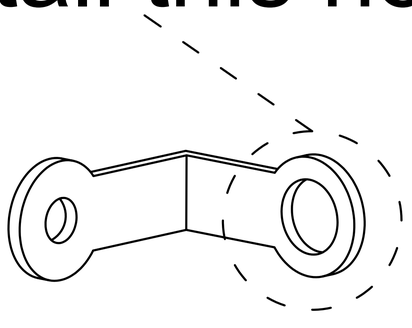

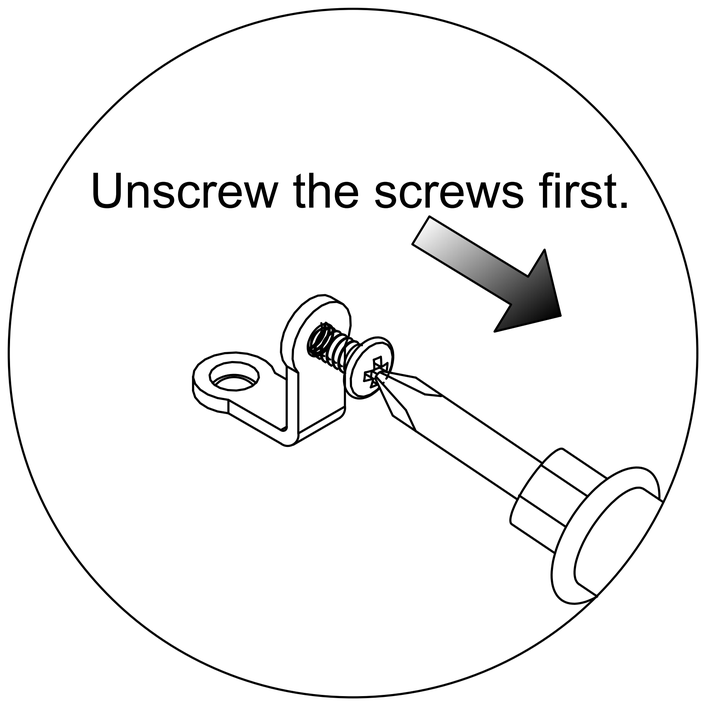


Step 3

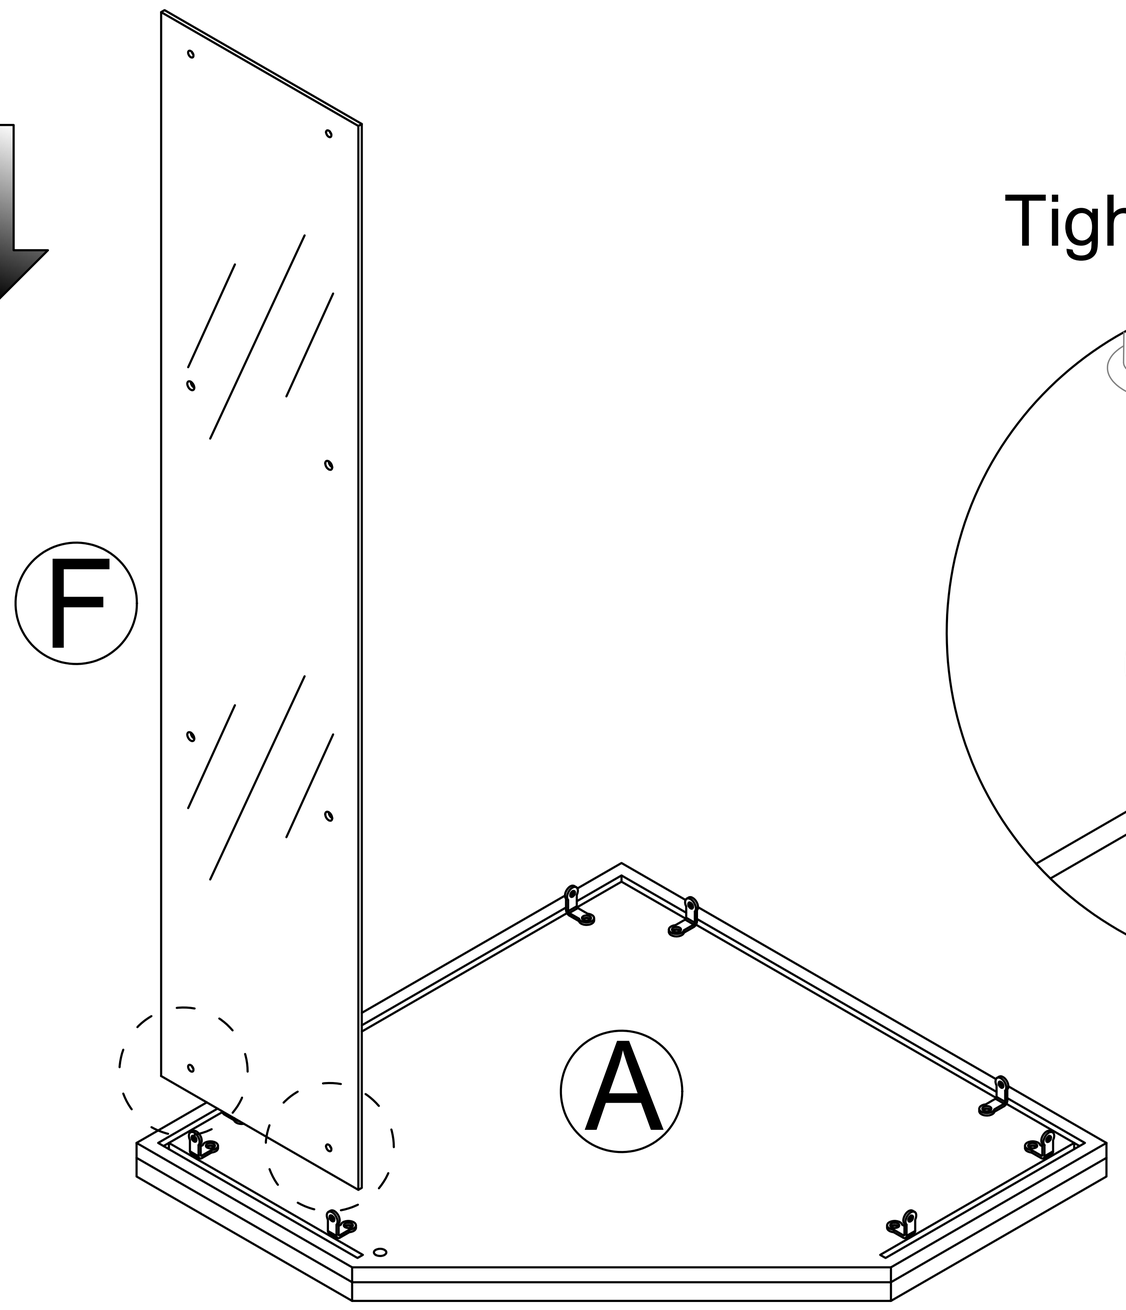

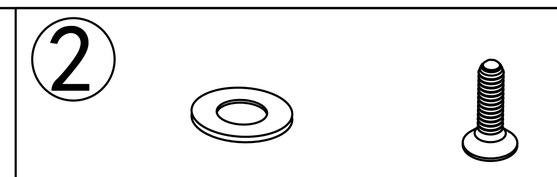



Tighten all screws.

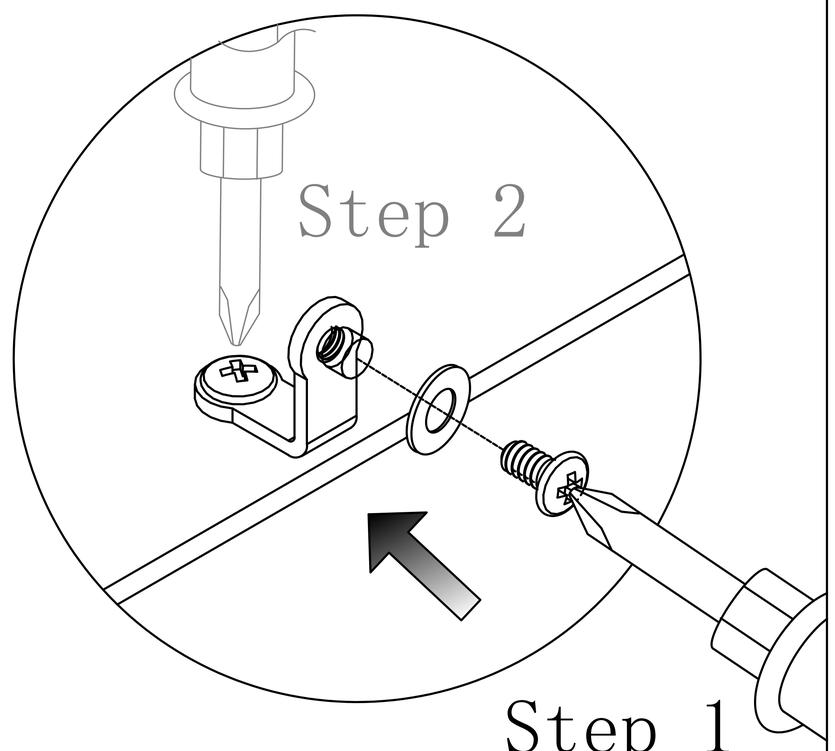


It is recommended to have two people assist with the installation.

Step 4

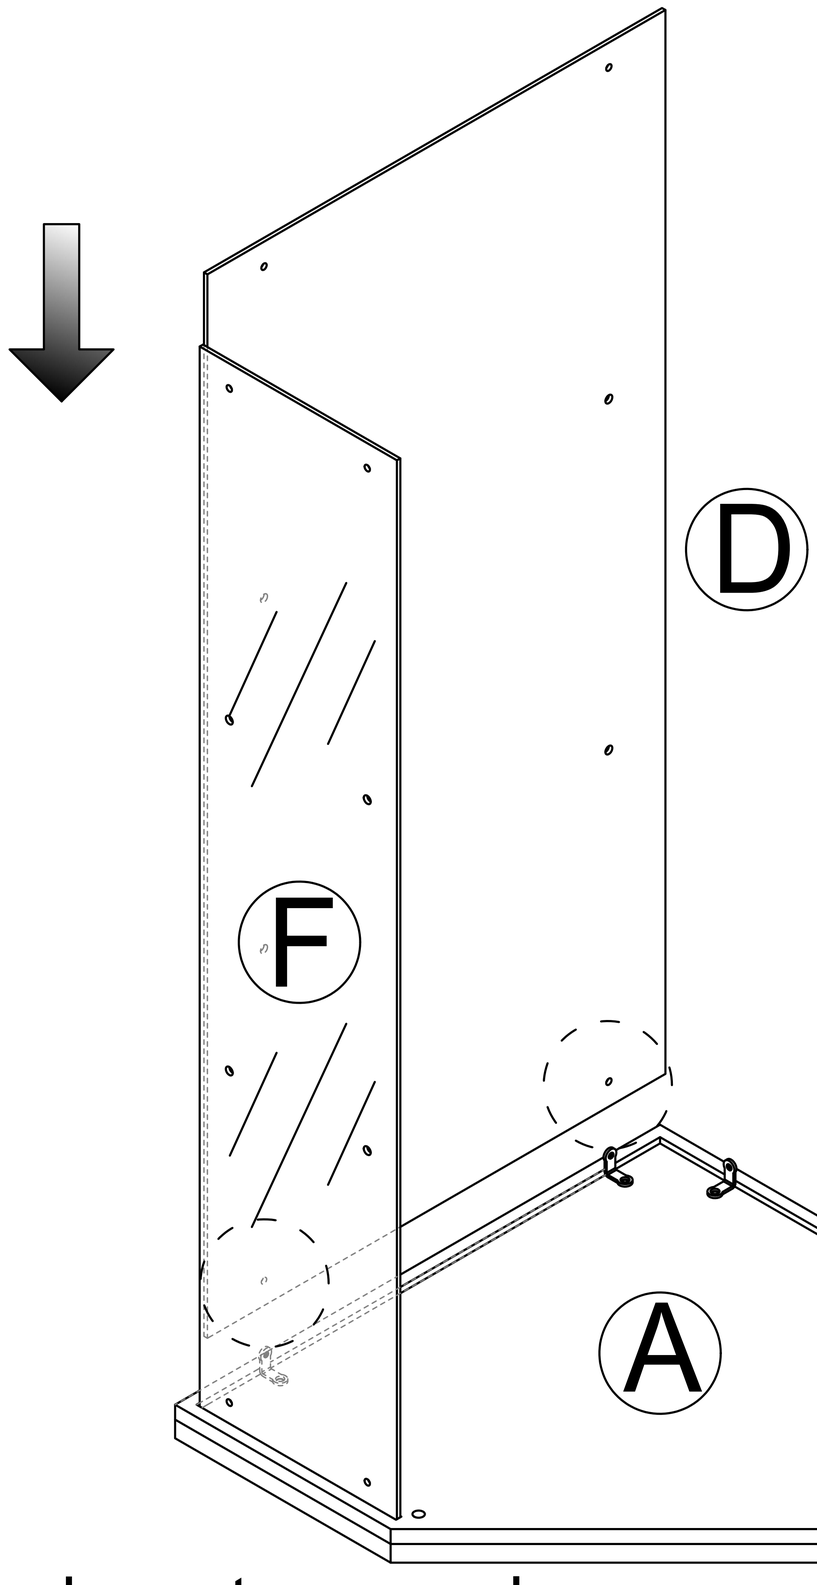

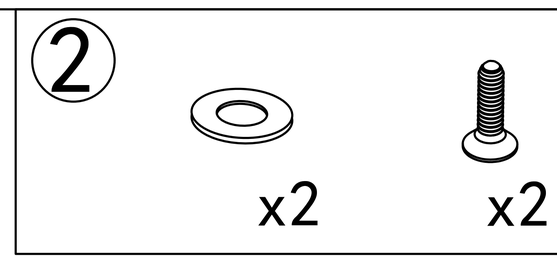



Tighten all screws.

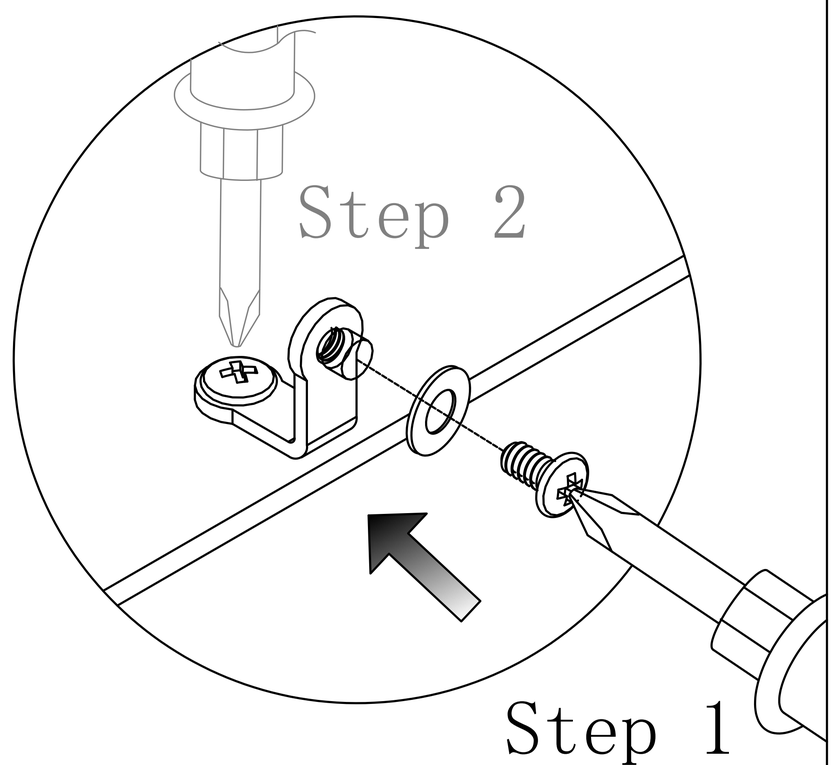


It is recommended to have two people assist with the installation.

Step 5

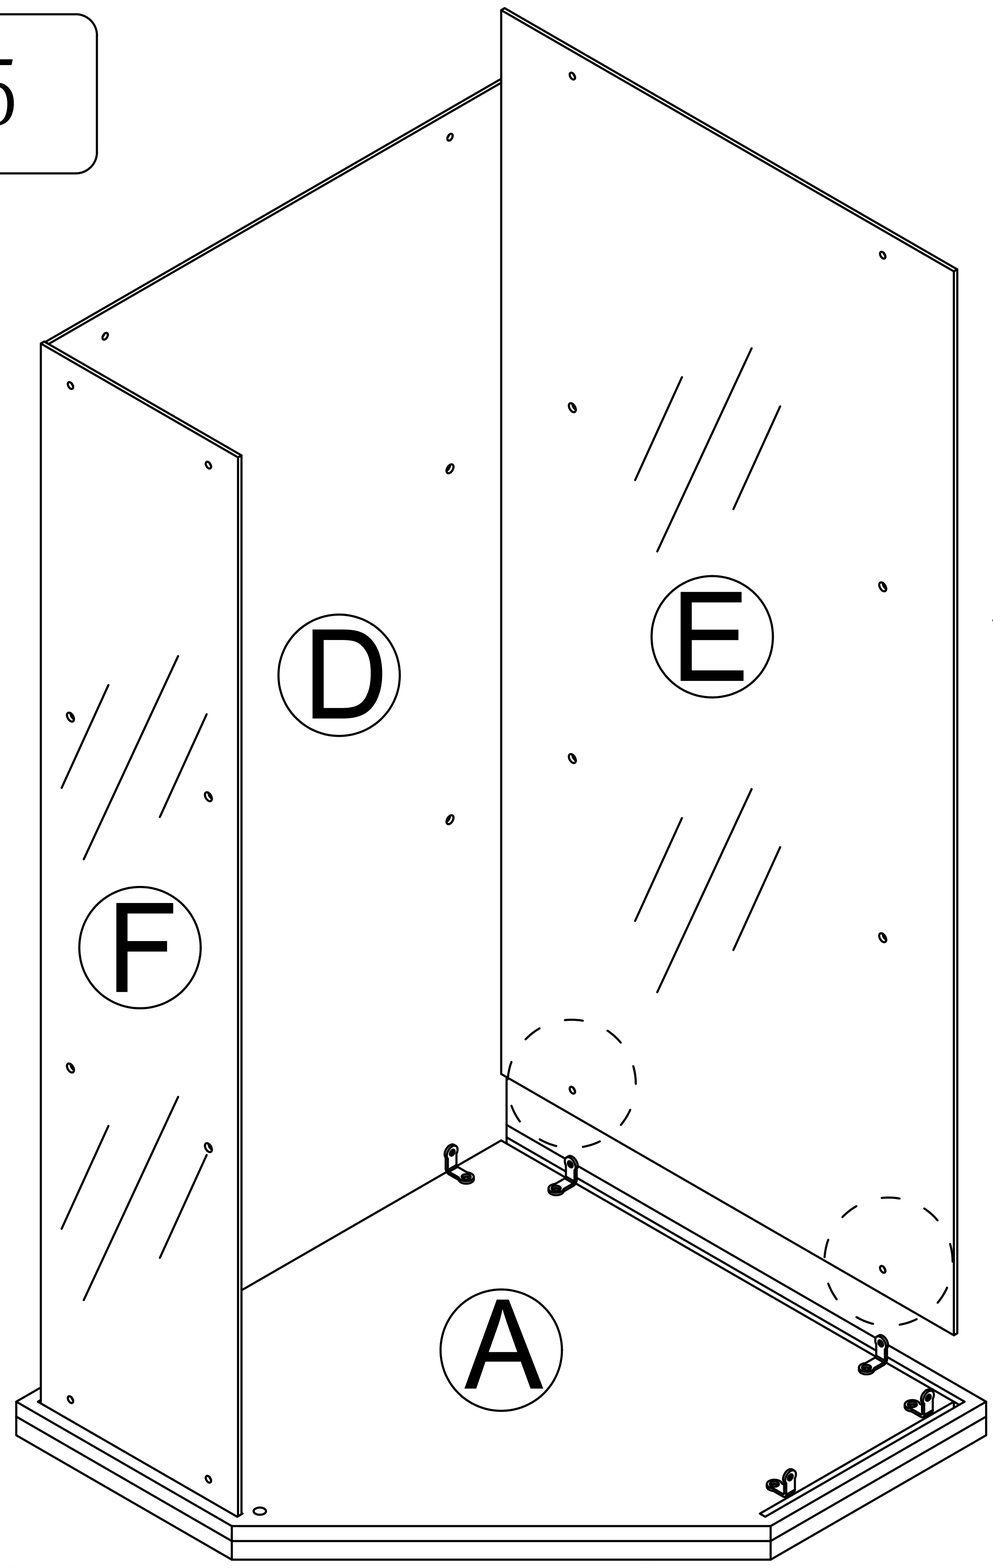

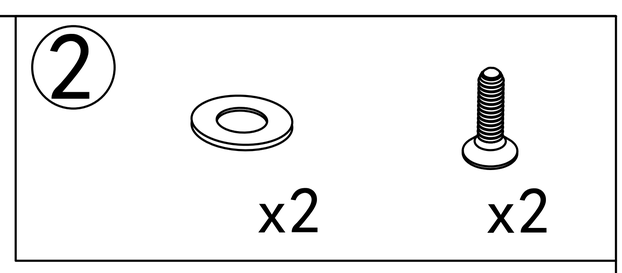



Tighten all screws.

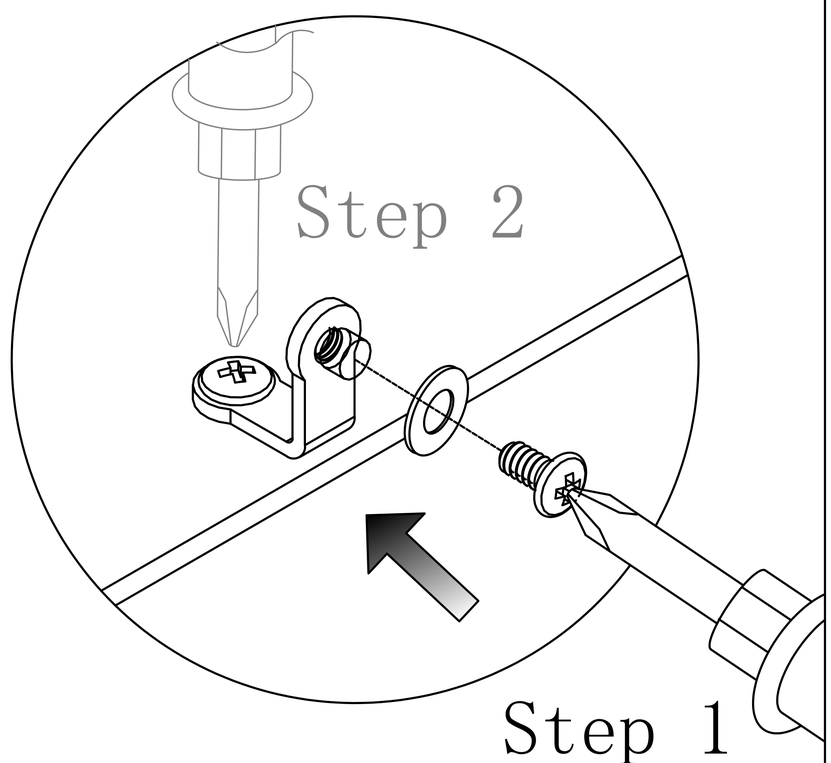


It is recommended to have two people assist with the installation.

Step 6

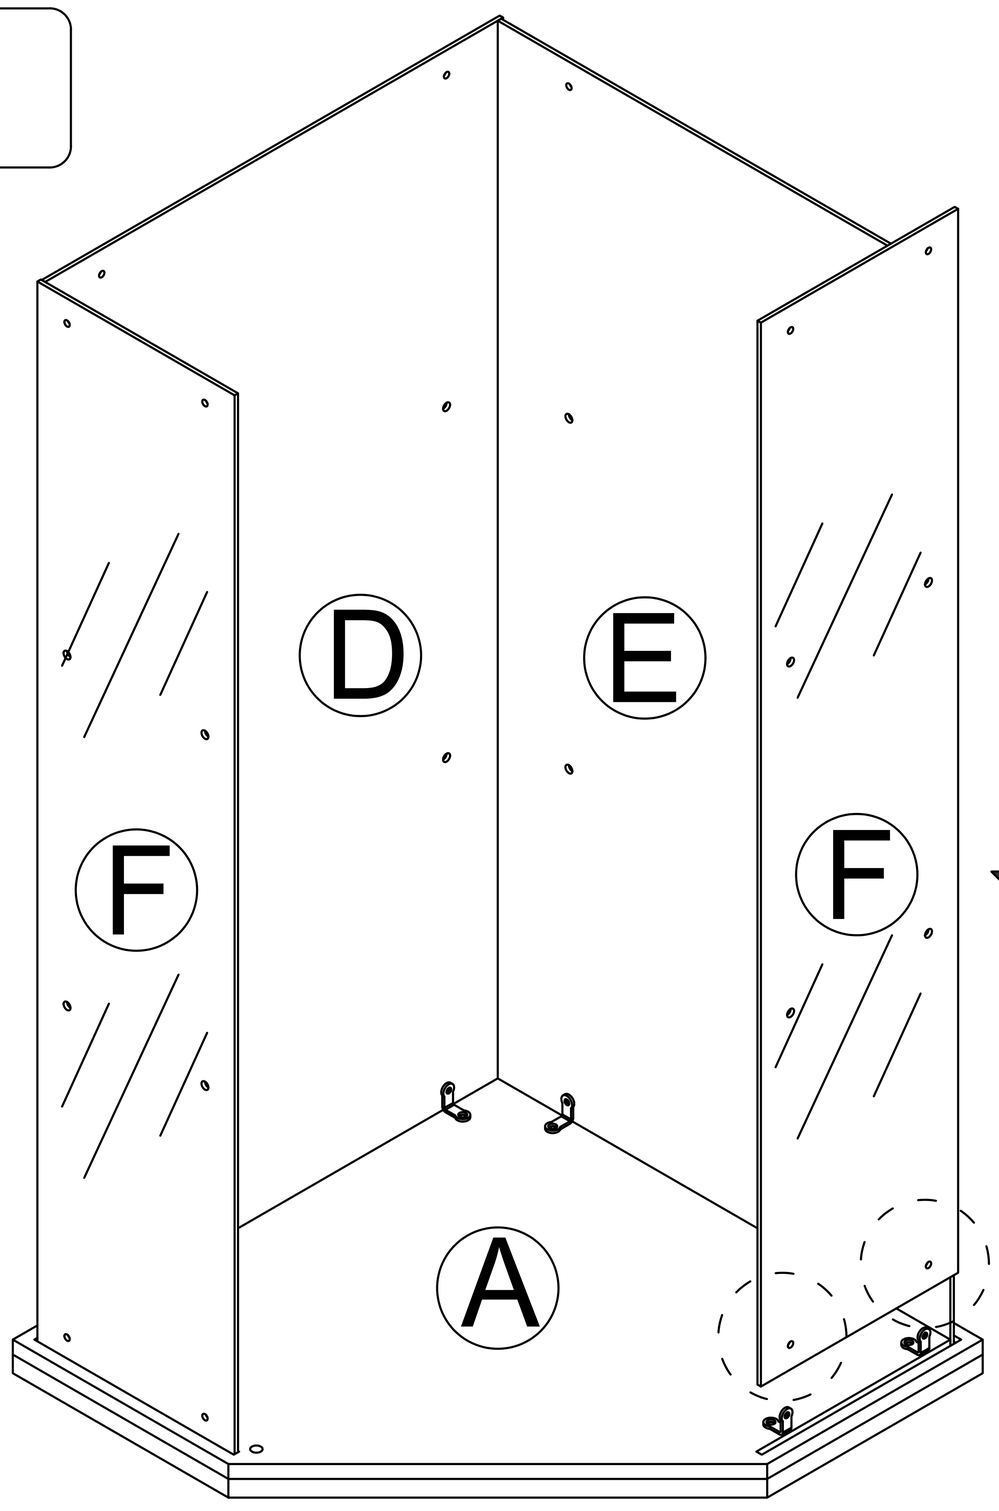

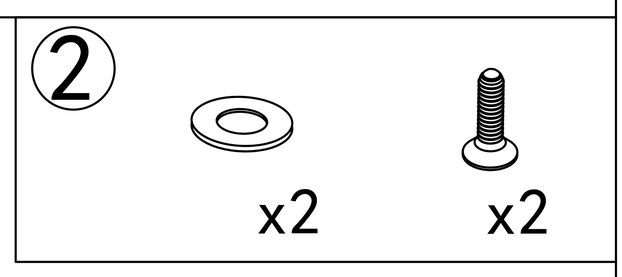


Tighten all screws.

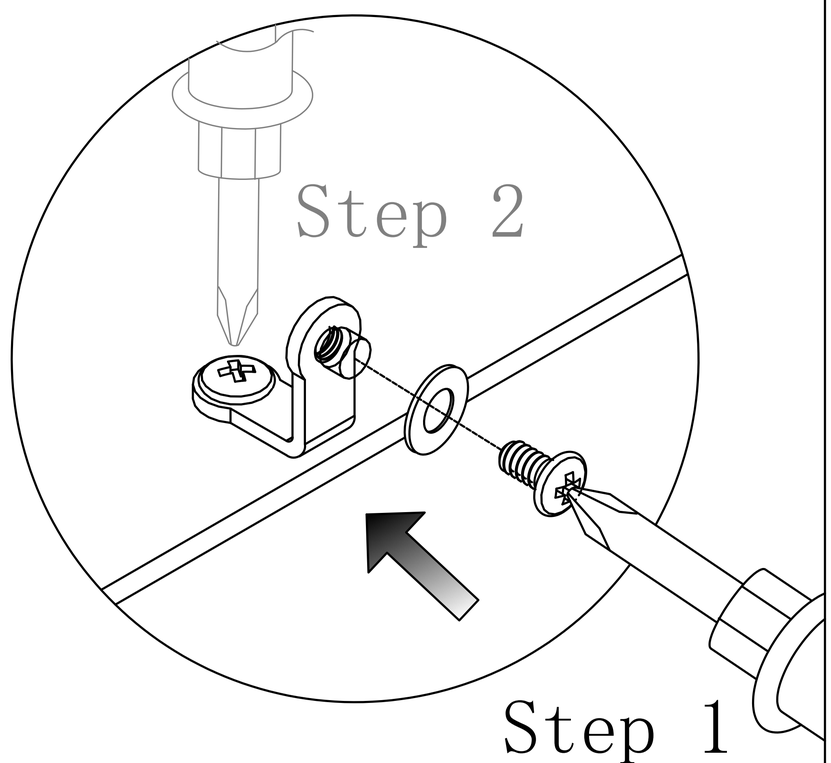



It is recommended to have two people assist with the installation.


Step 7

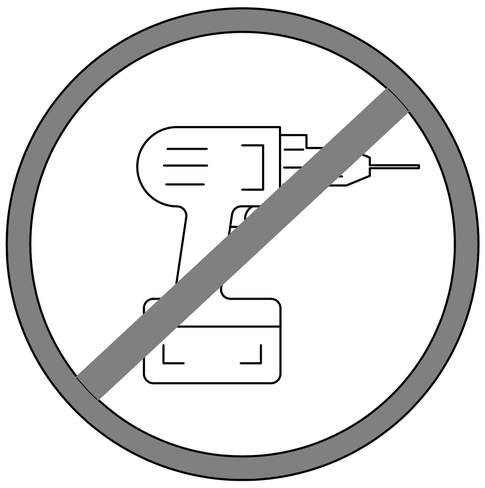


Prohibited: Electric screwdriver use.

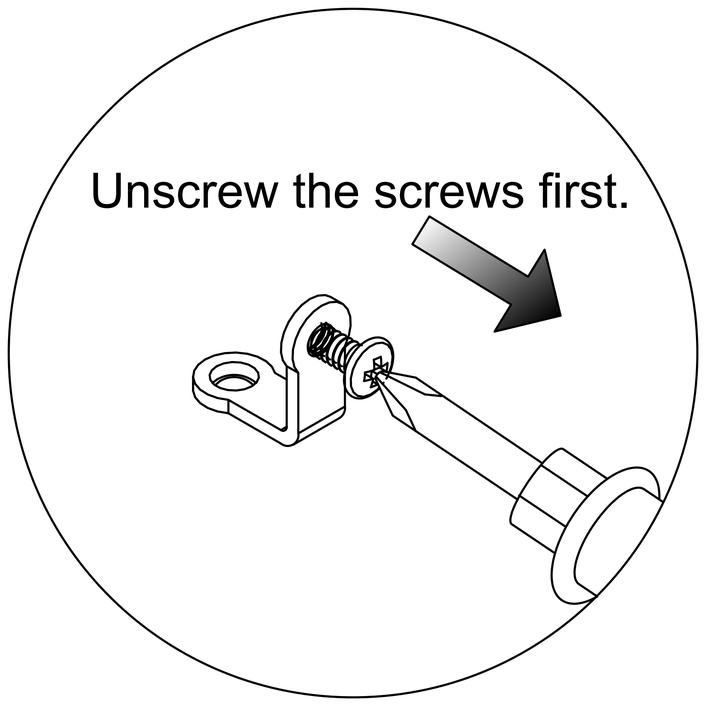


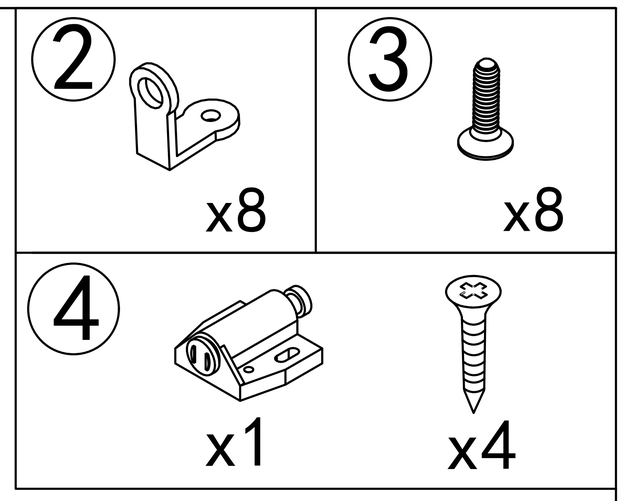

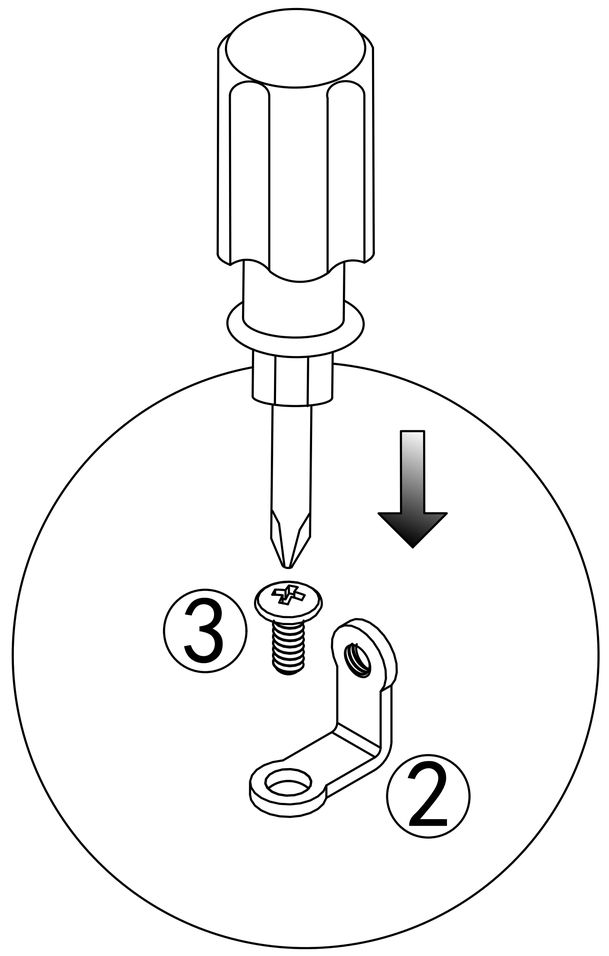


Do not fully tighten the screws.

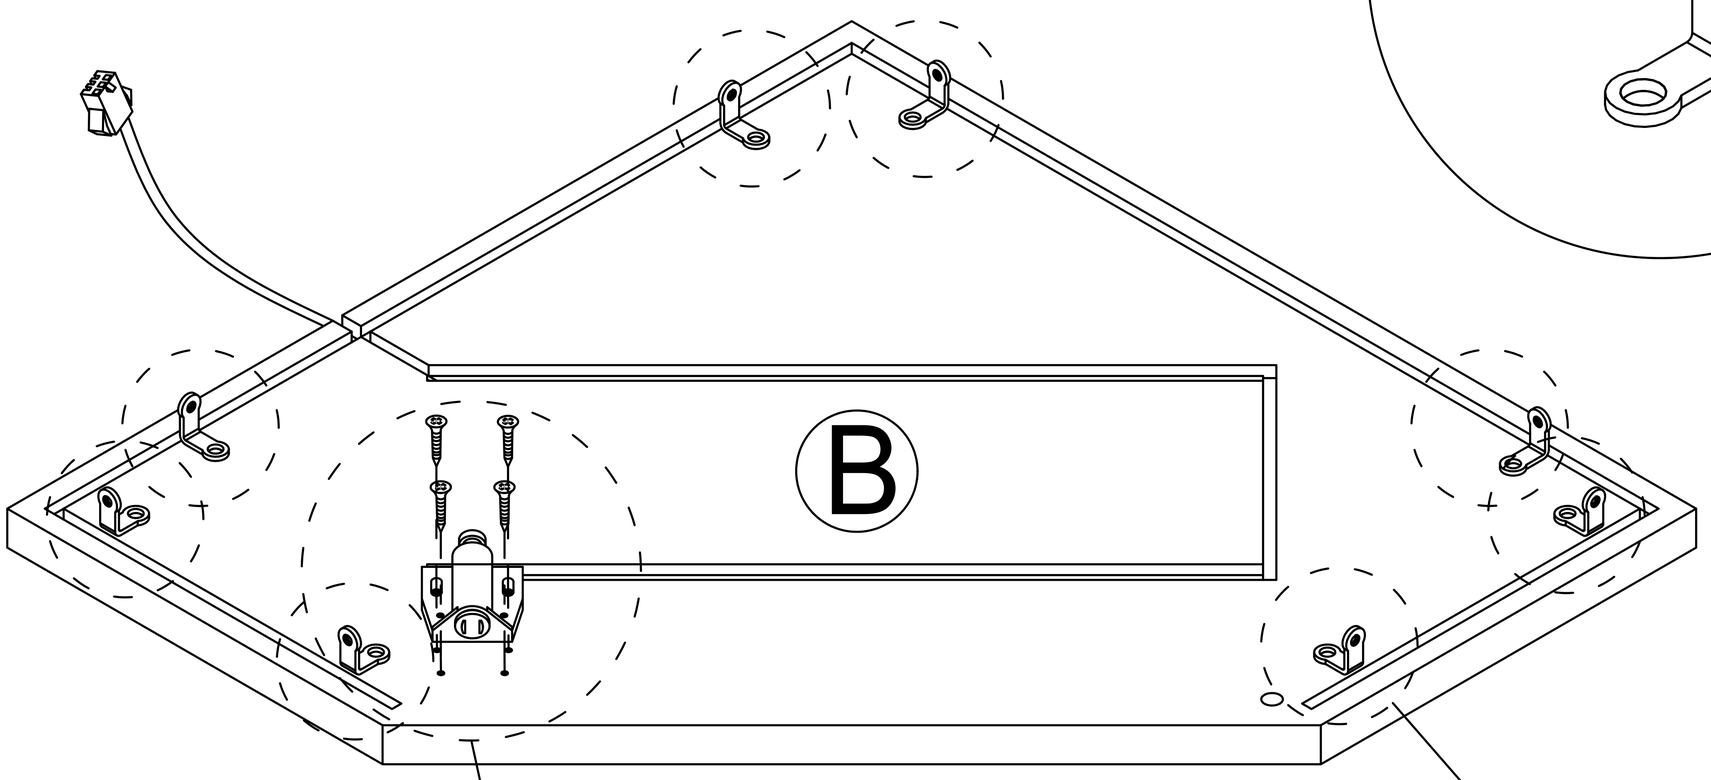

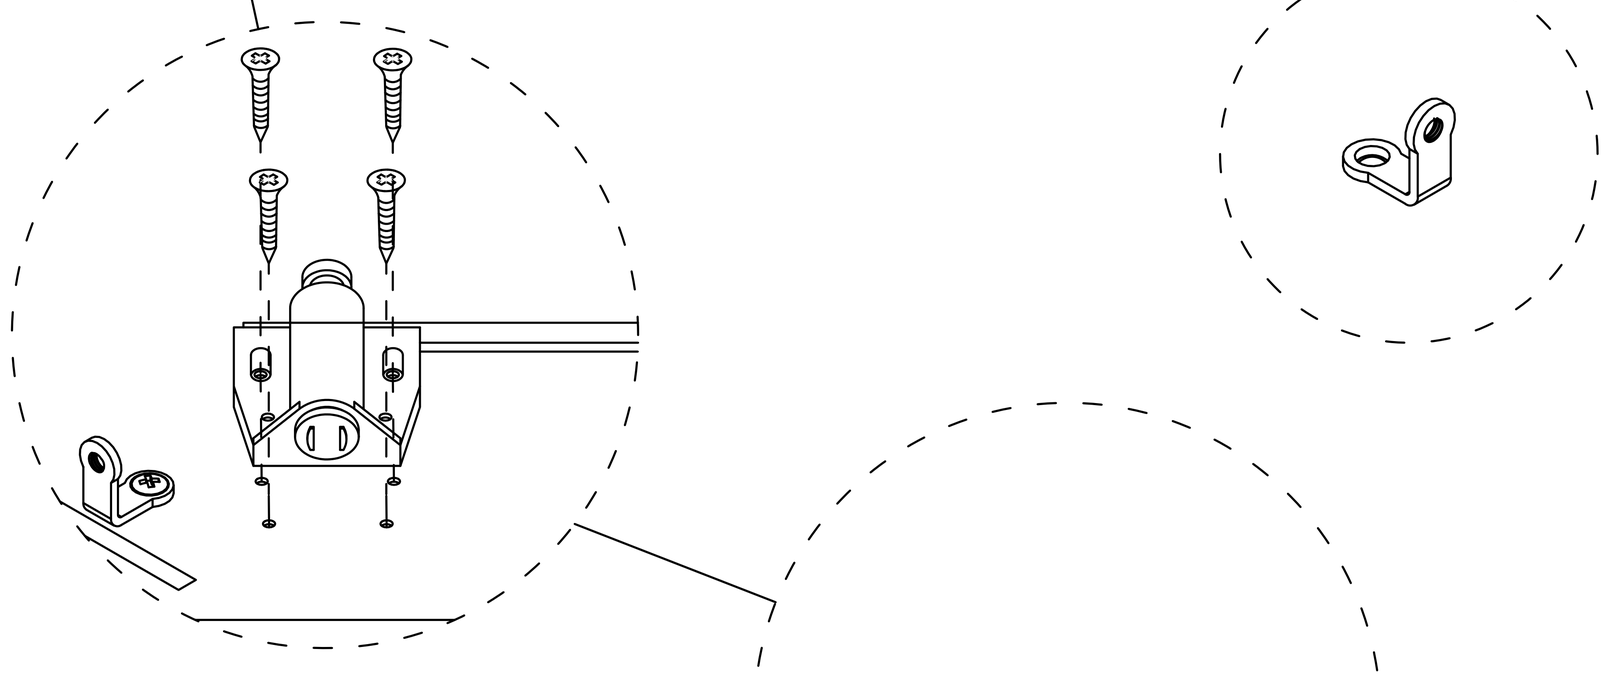


Install this hole

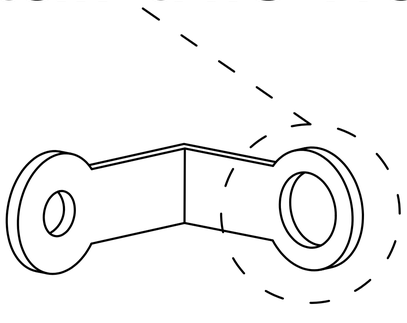


Step 8


2




x8



x8

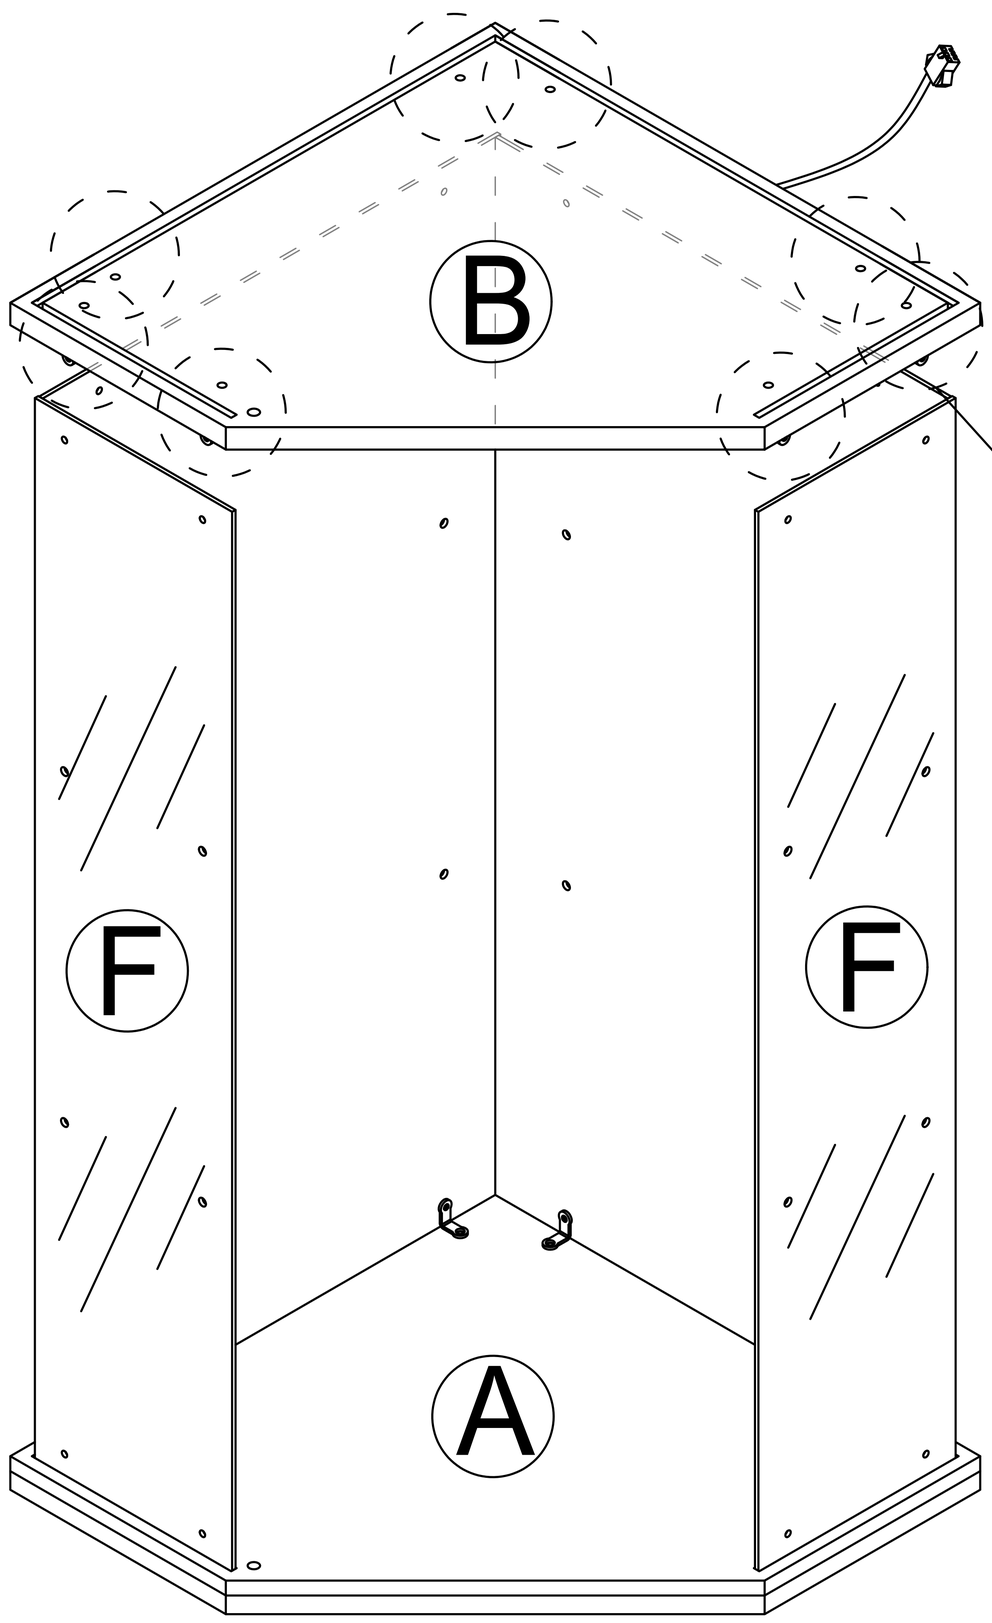


Tighten all screws.

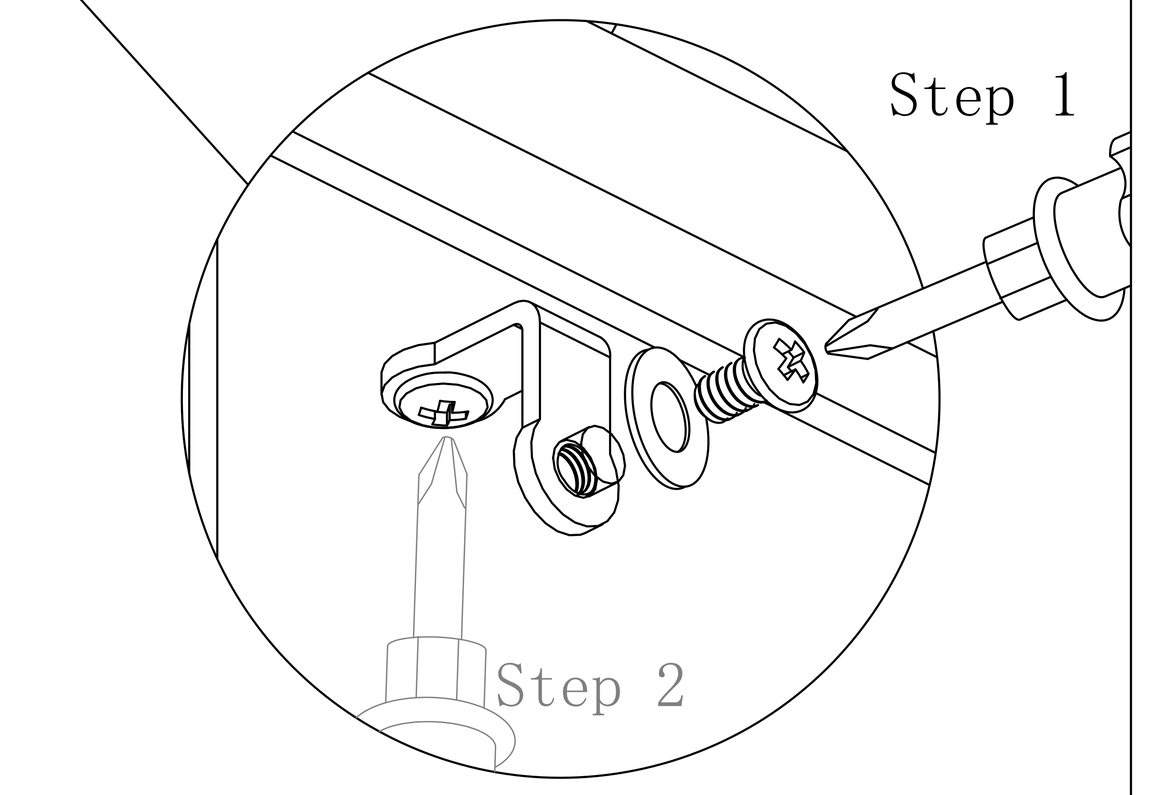

It is recommended to have two people assist with the installation.


Step 9


② x8	③ x8

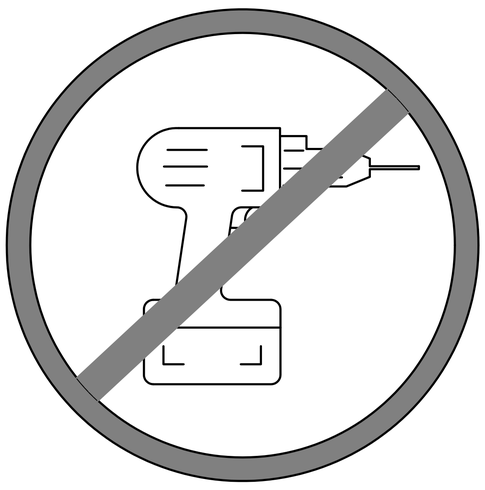


Do not fully tighten the screws.


Prohibited: Electric screwdriver use.

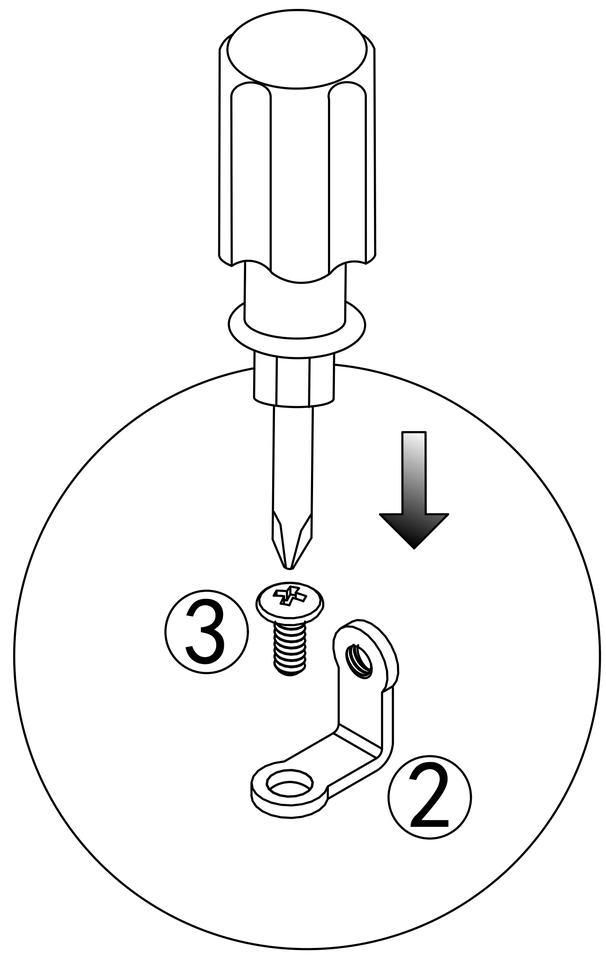

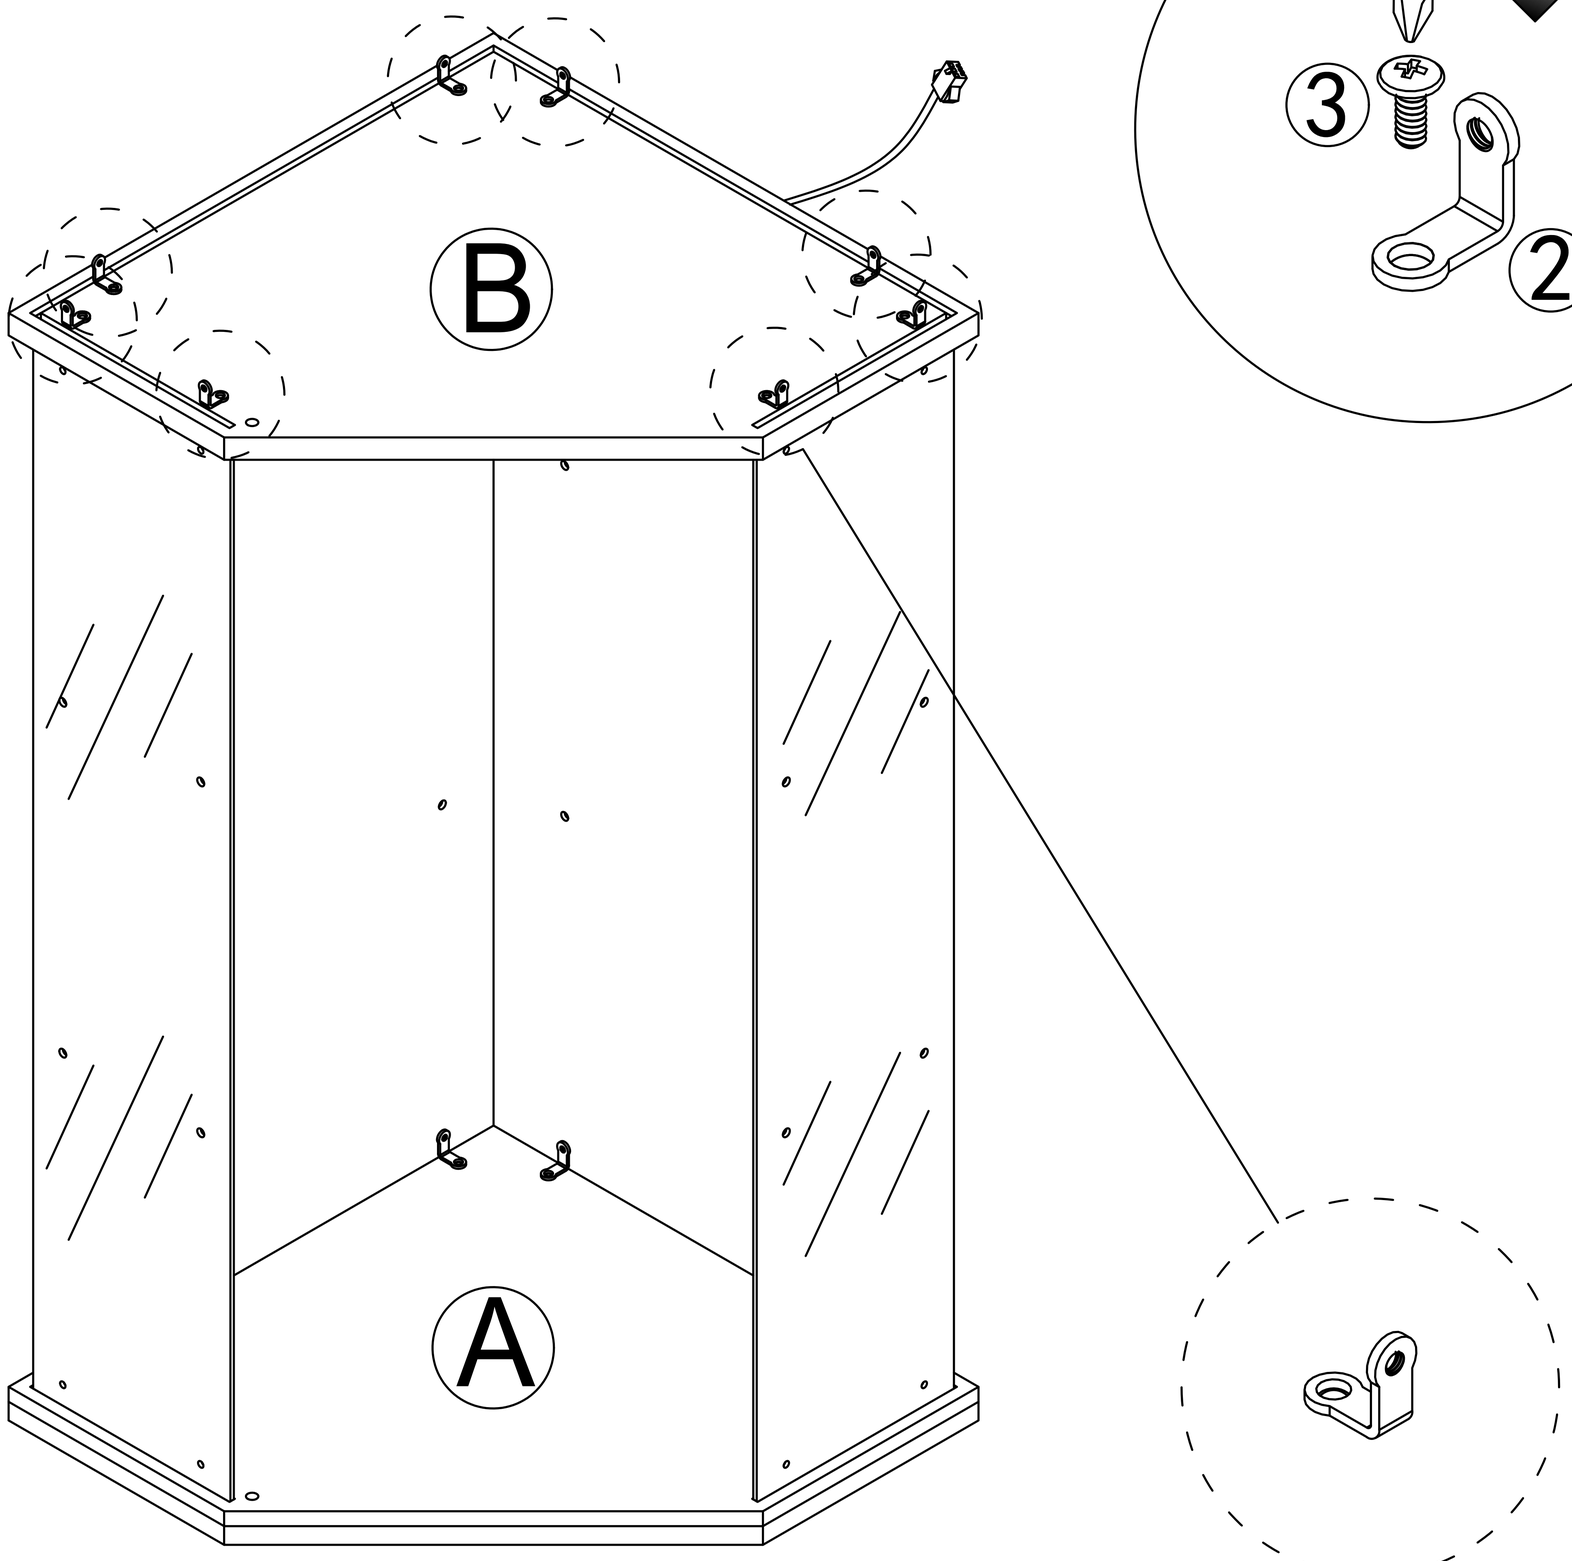


Install this hole

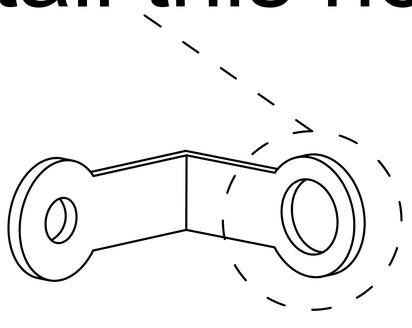


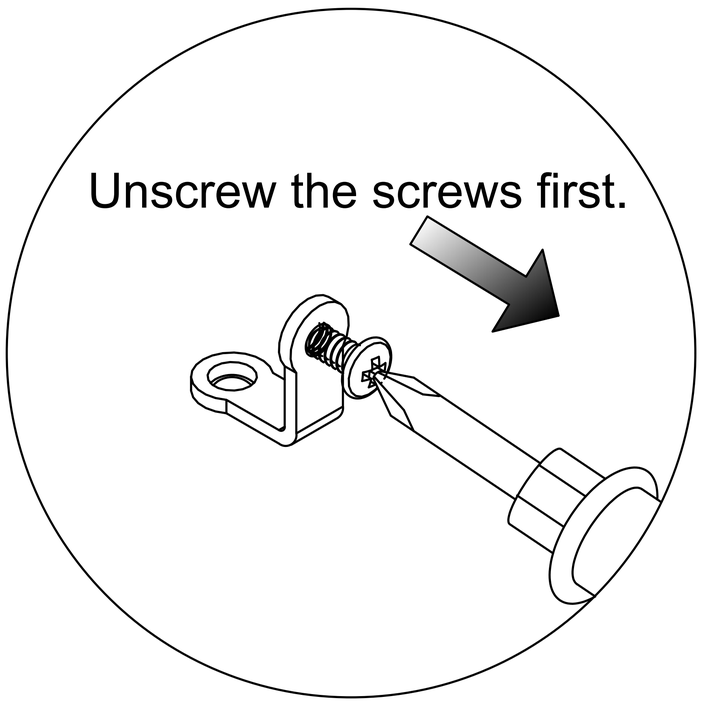


Step 10

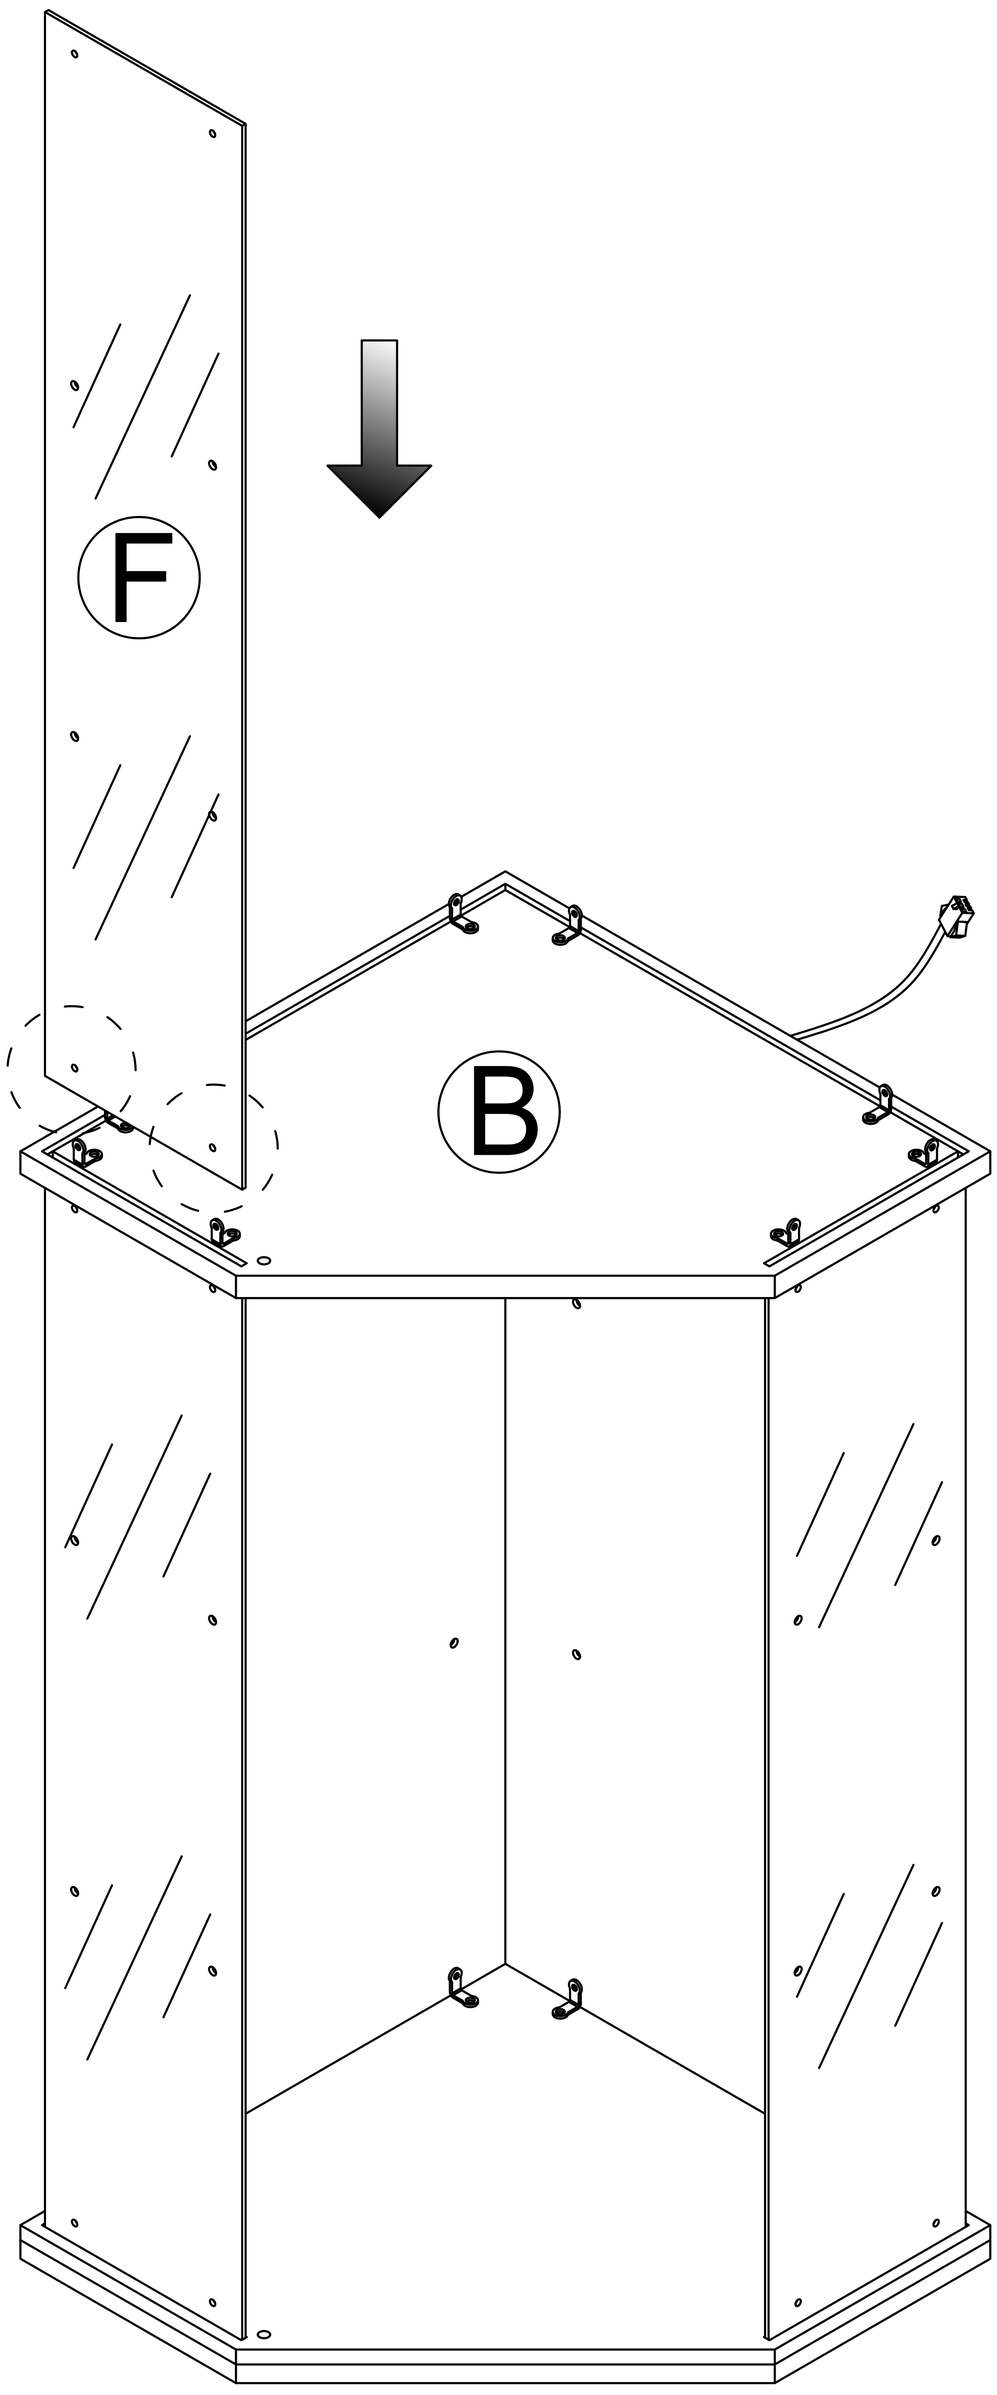

2




x2



x2

Tighten all screws.

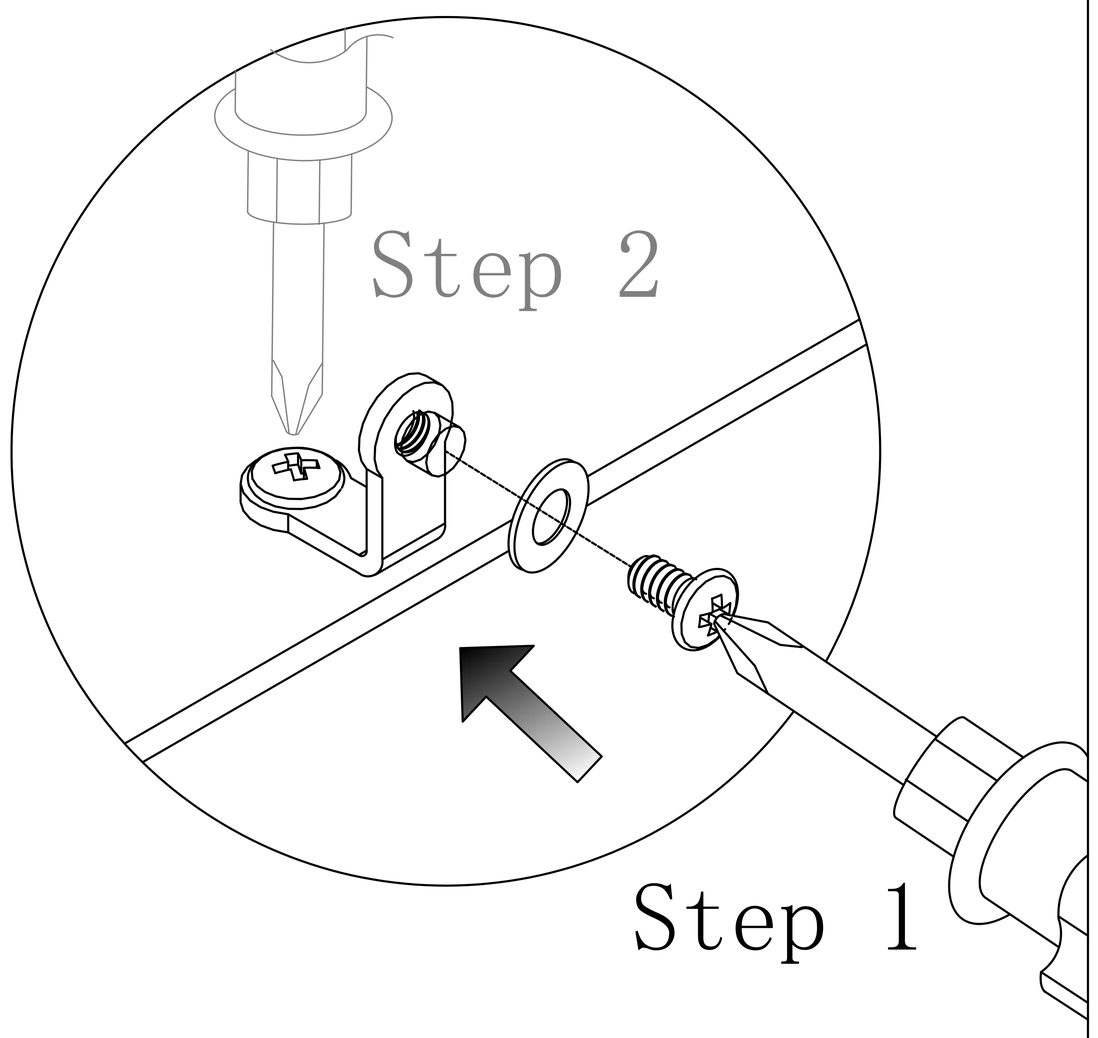


It is recommended to have two people assist with the installation.

Step 11


2

x2

x2

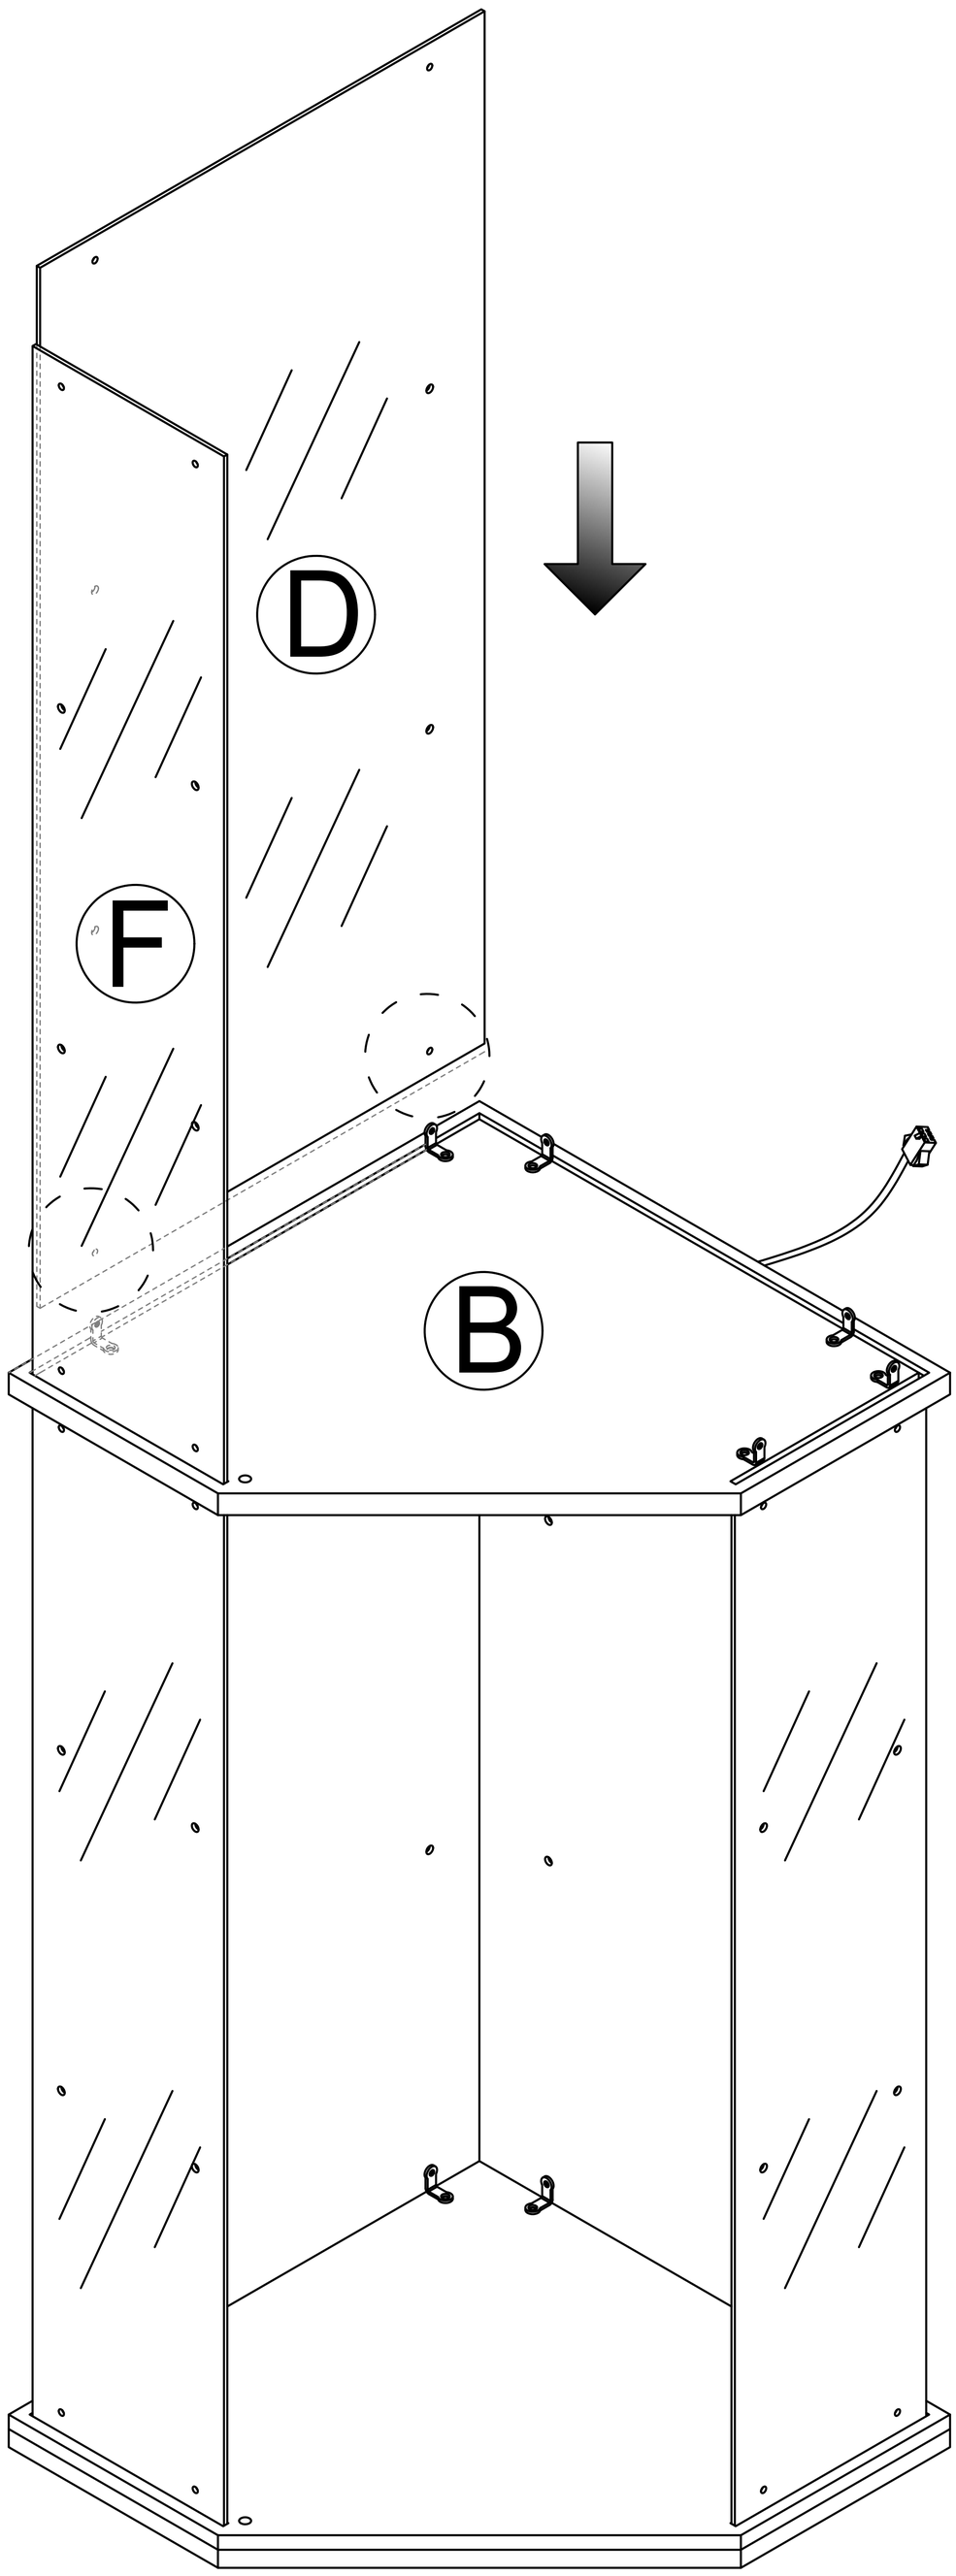


Tighten all screws.

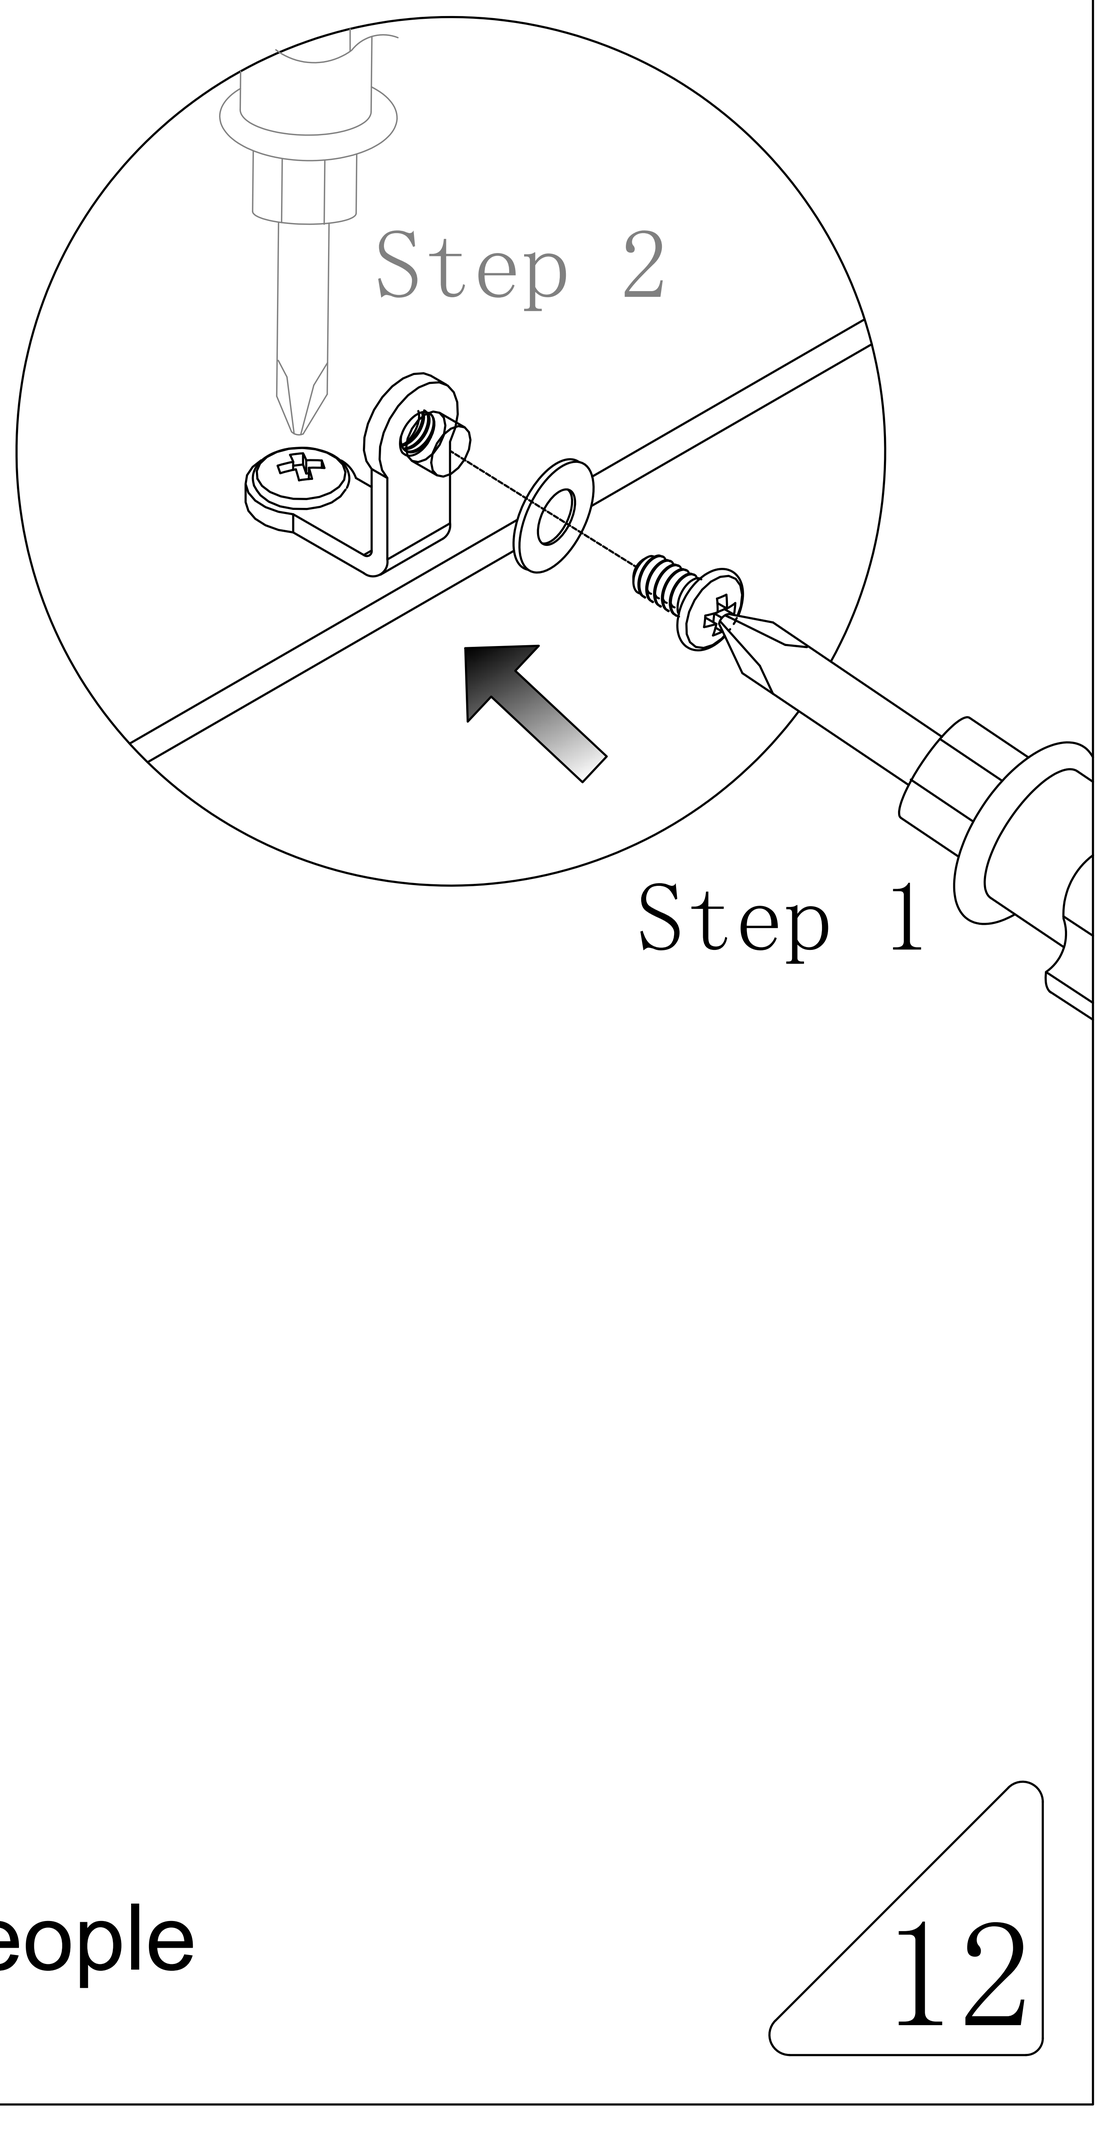

It is recommended to have two people assist with the installation.

Step 12

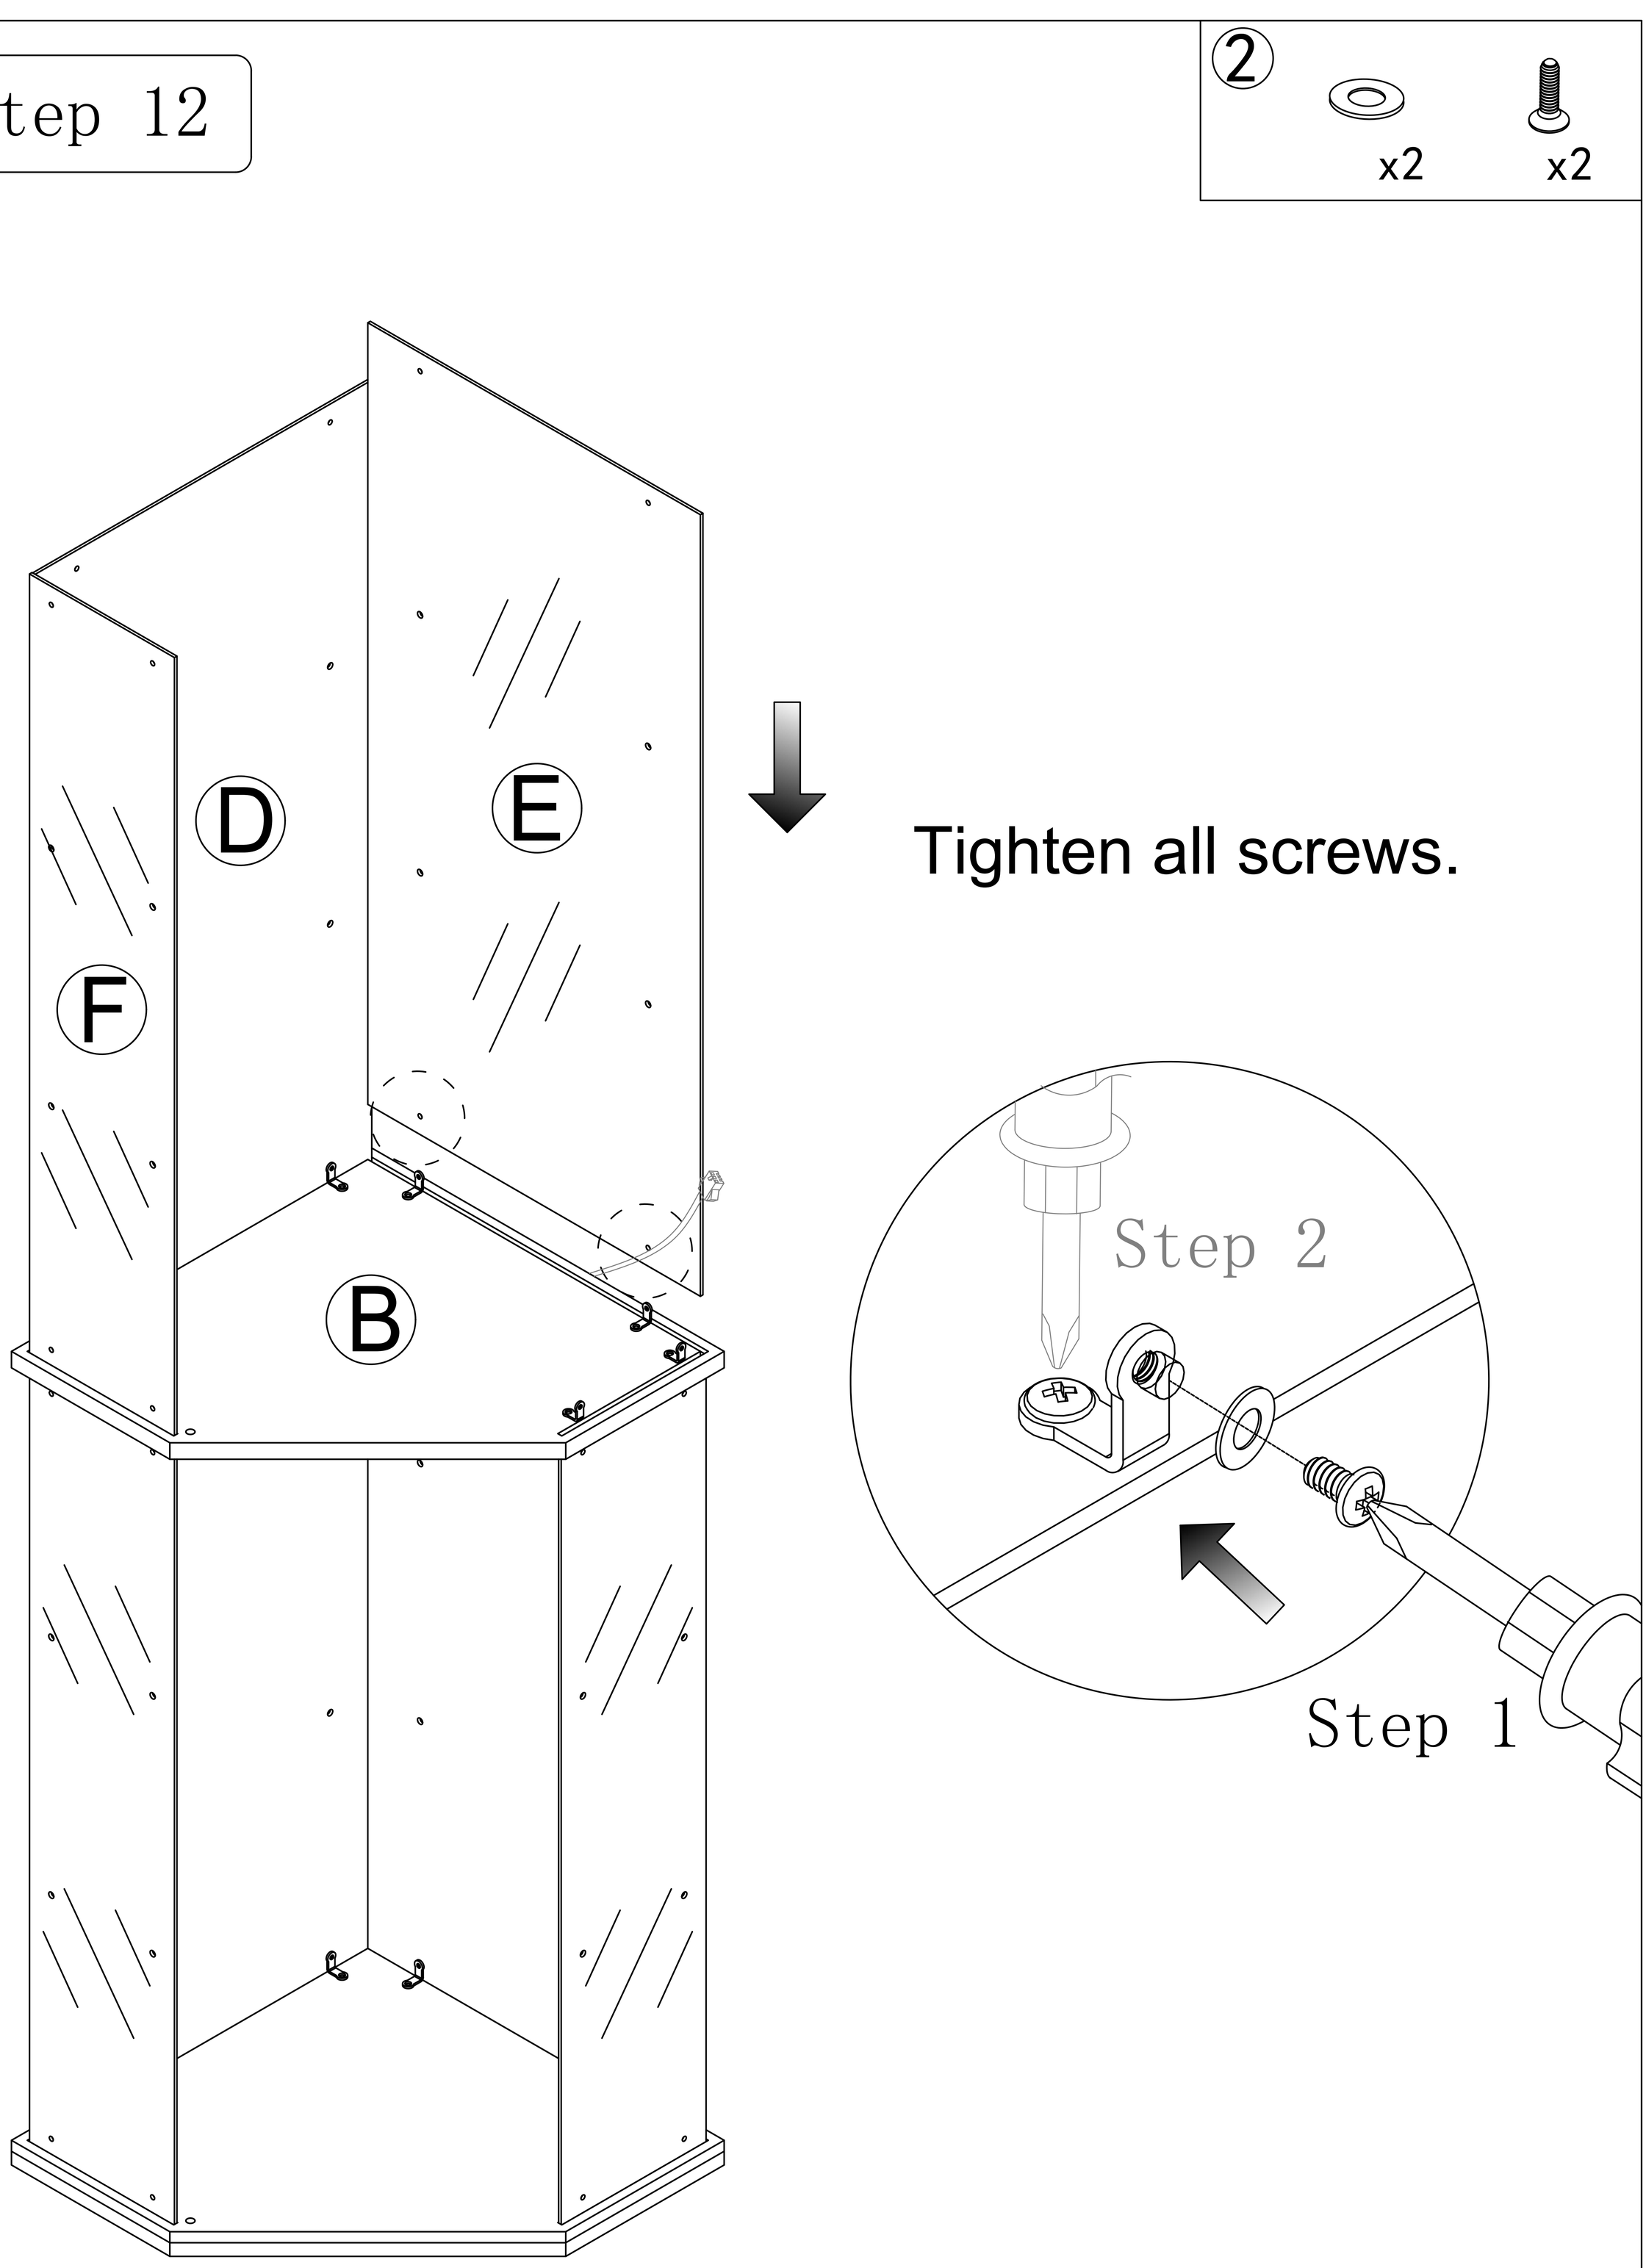


It is recommended to have two people assist with the installation.

Step 13


2

x2

x2

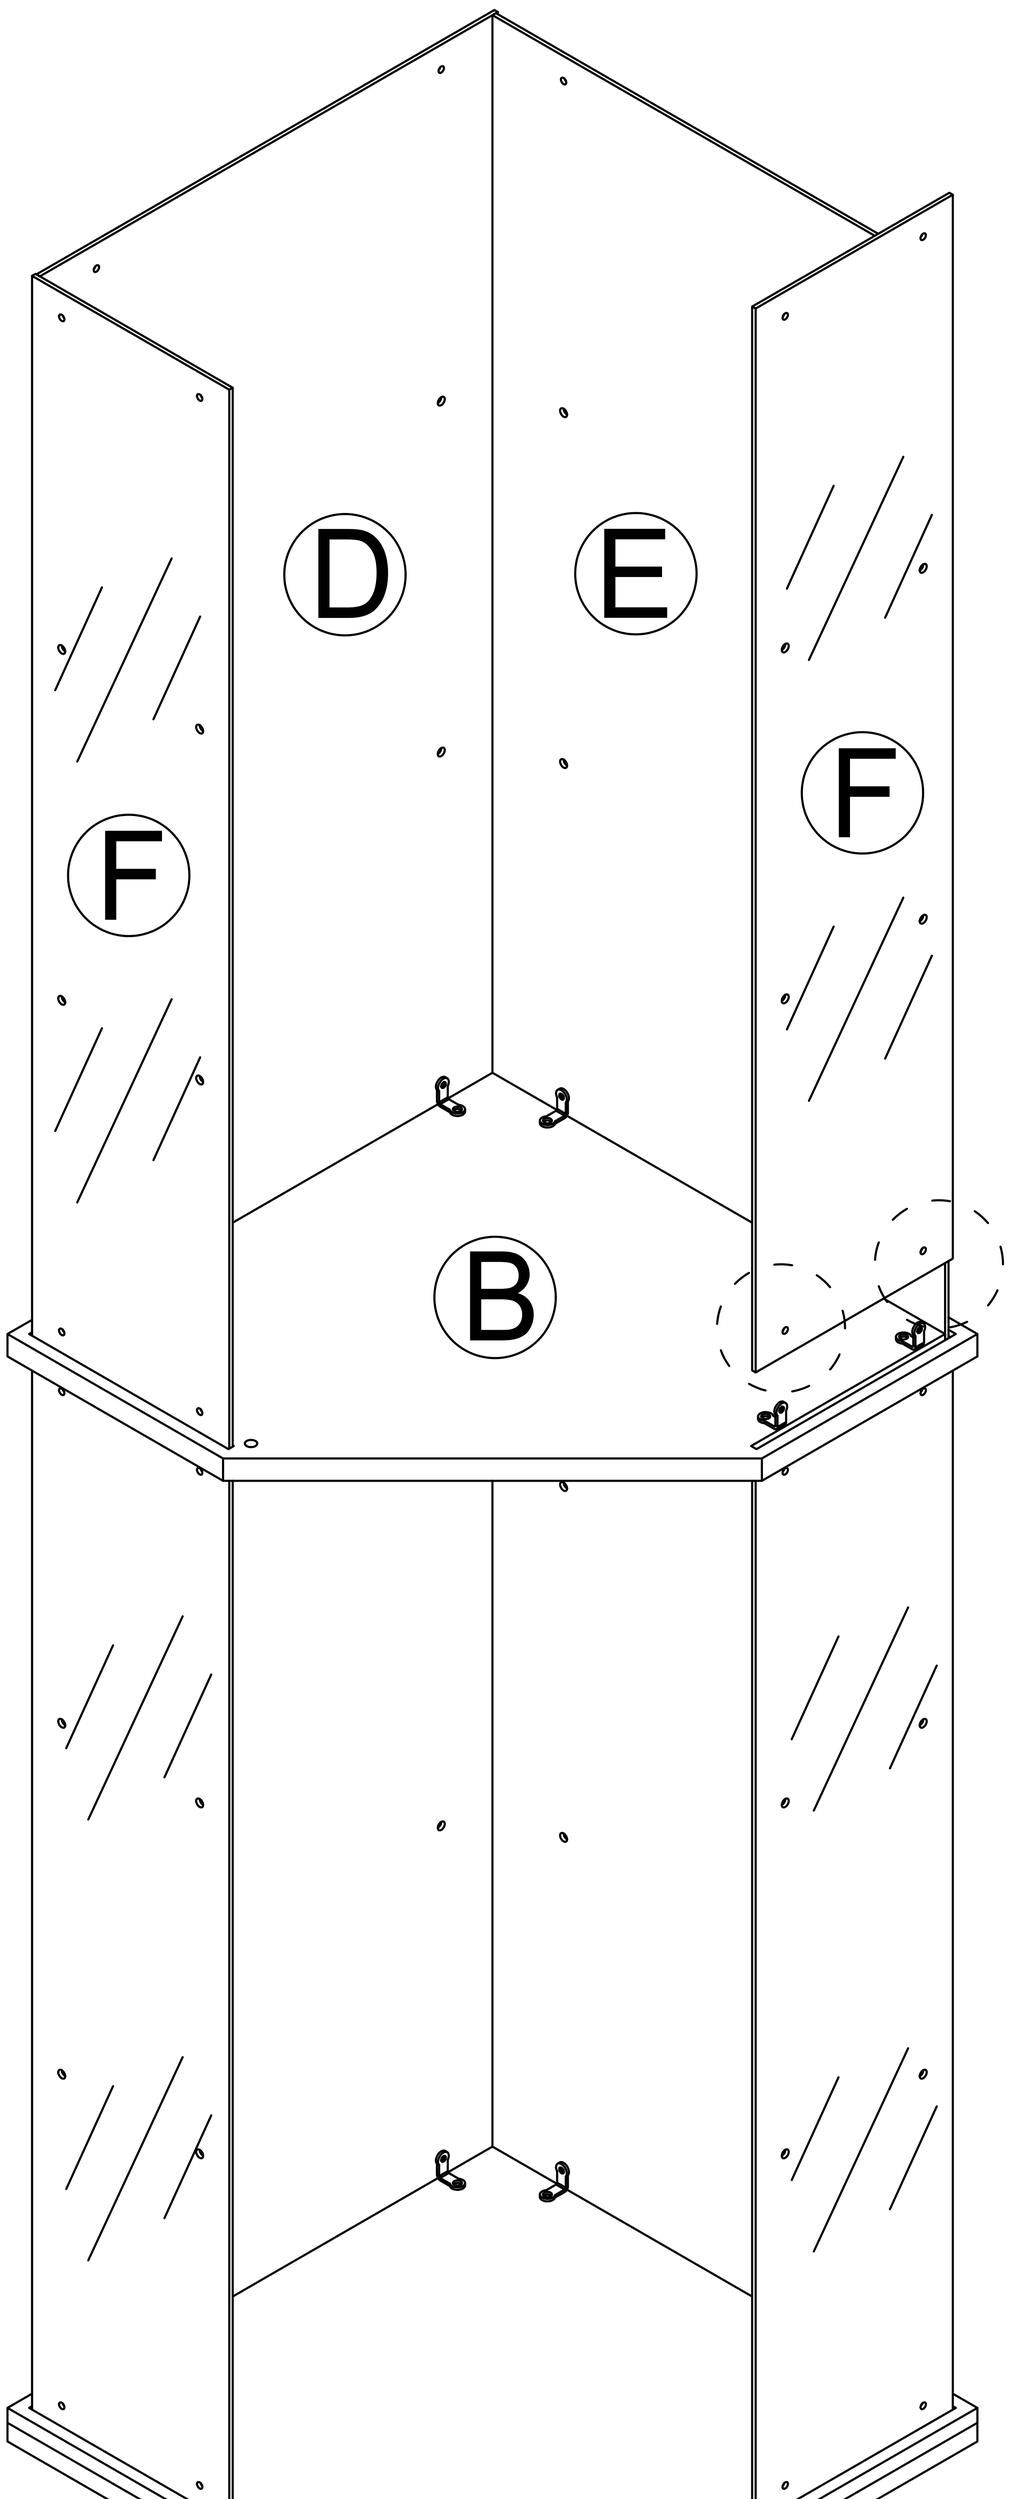


Tighten all screws.

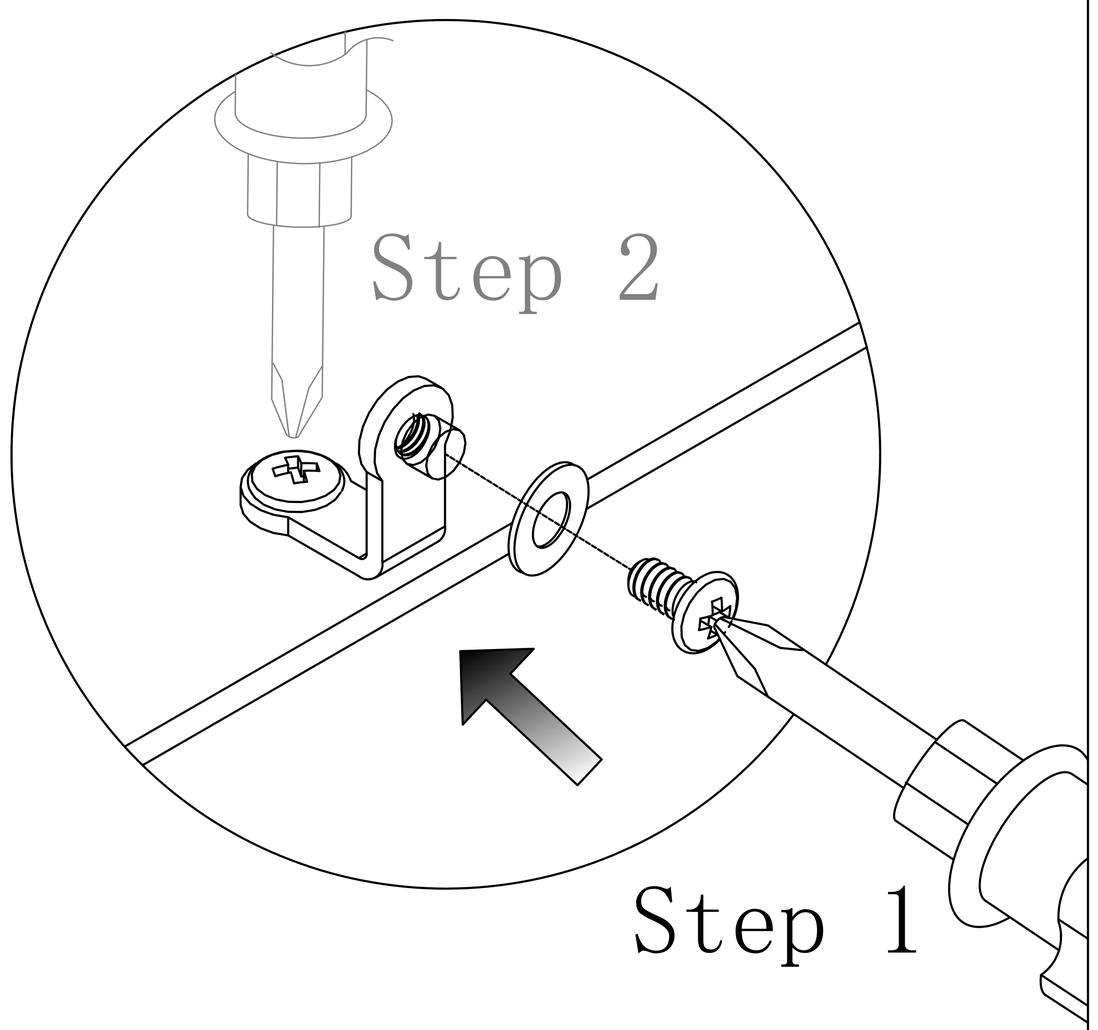





It is recommended to have two people assist with the installation.

Step 14

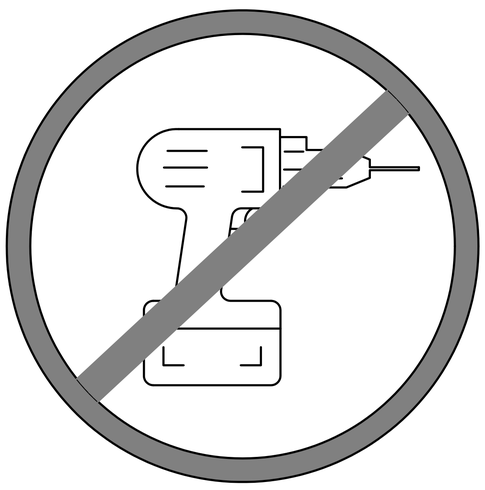



Prohibited: Electric screwdriver use.

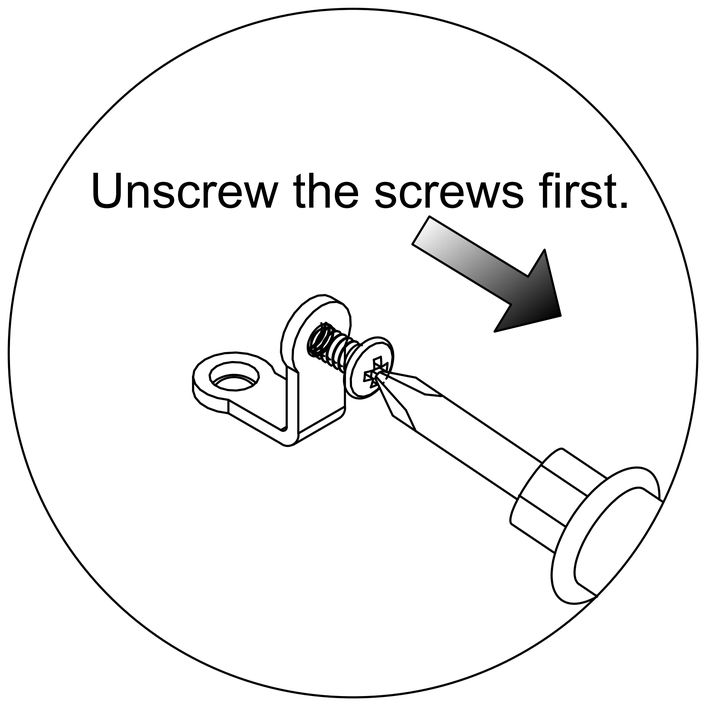



2		x8	
3		x8	
4		x1	 x4


Do not fully tighten the screws.

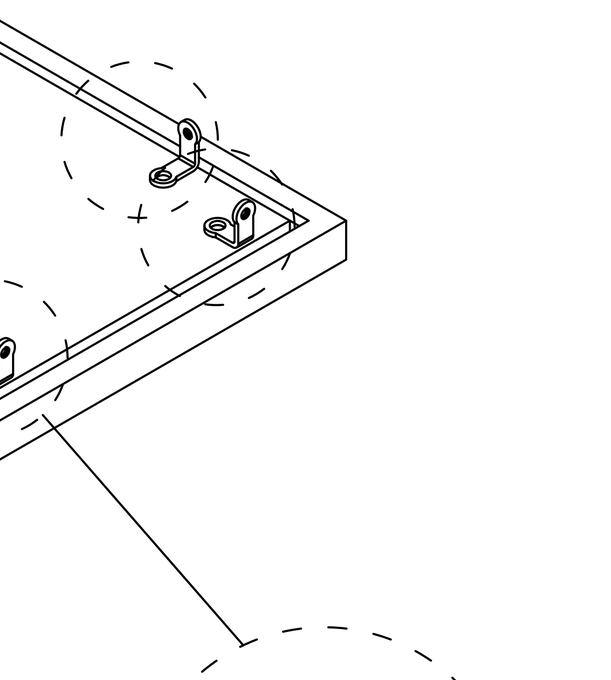

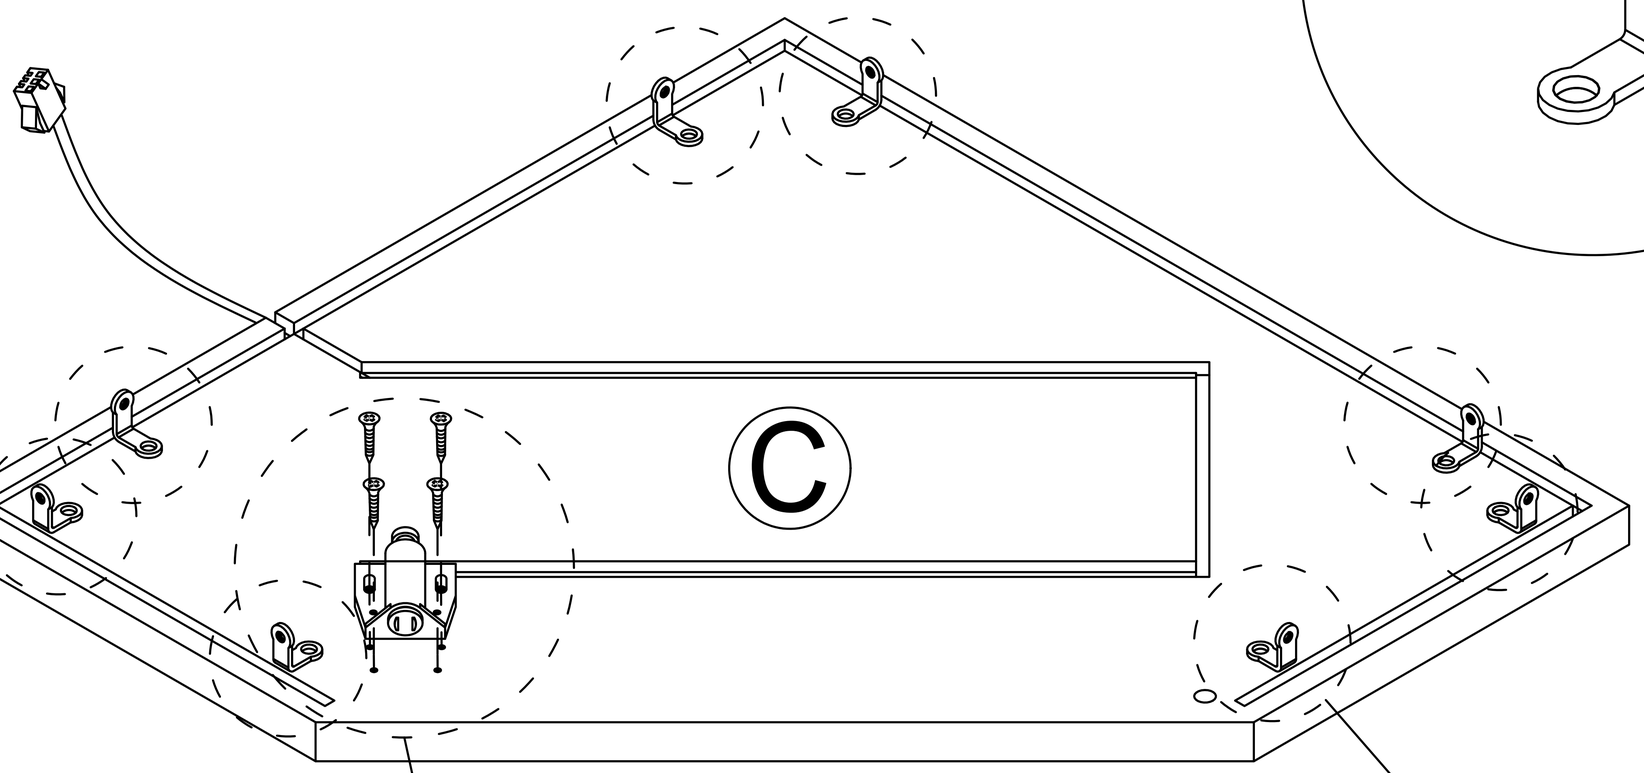


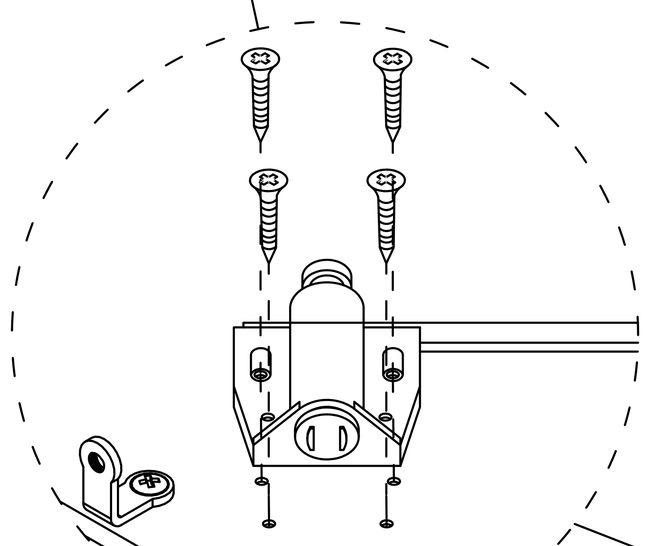

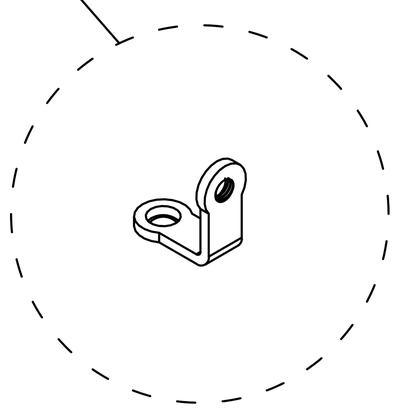


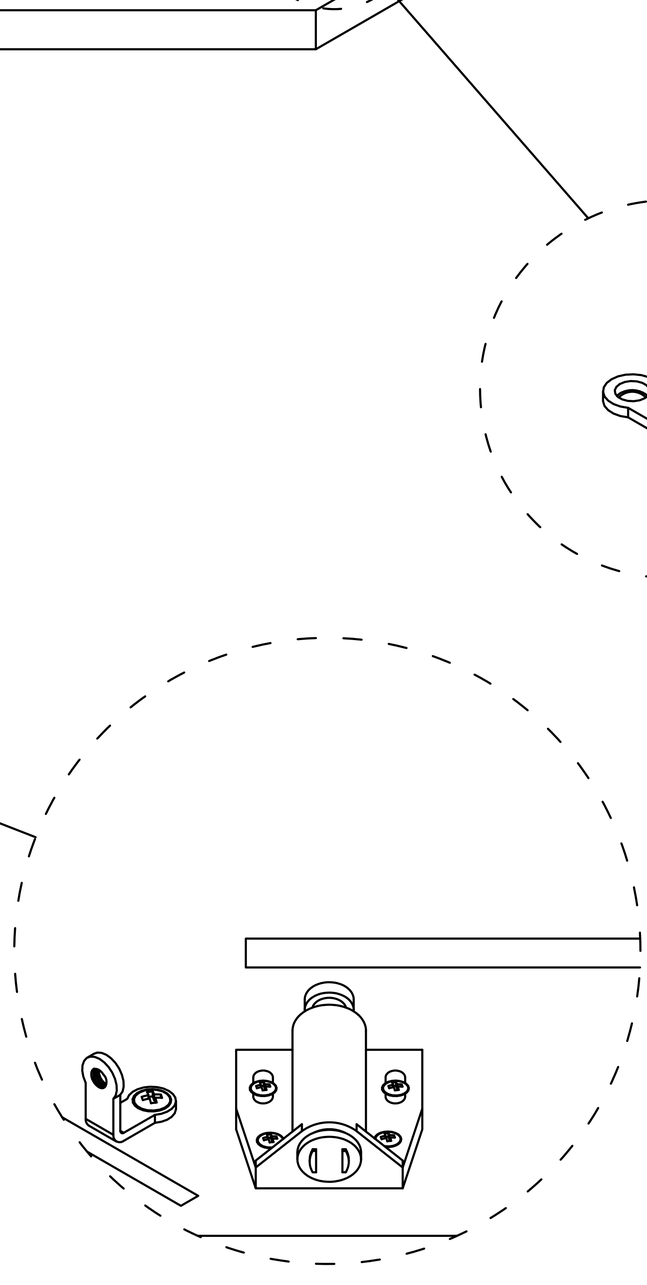


Install this hole

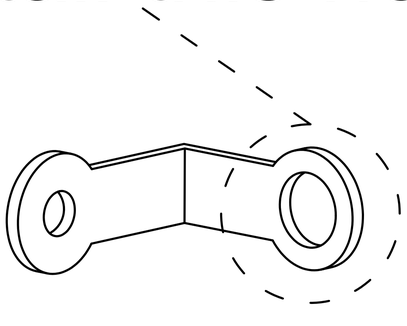


Step 15

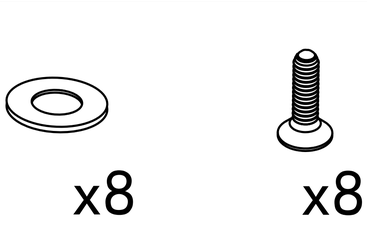

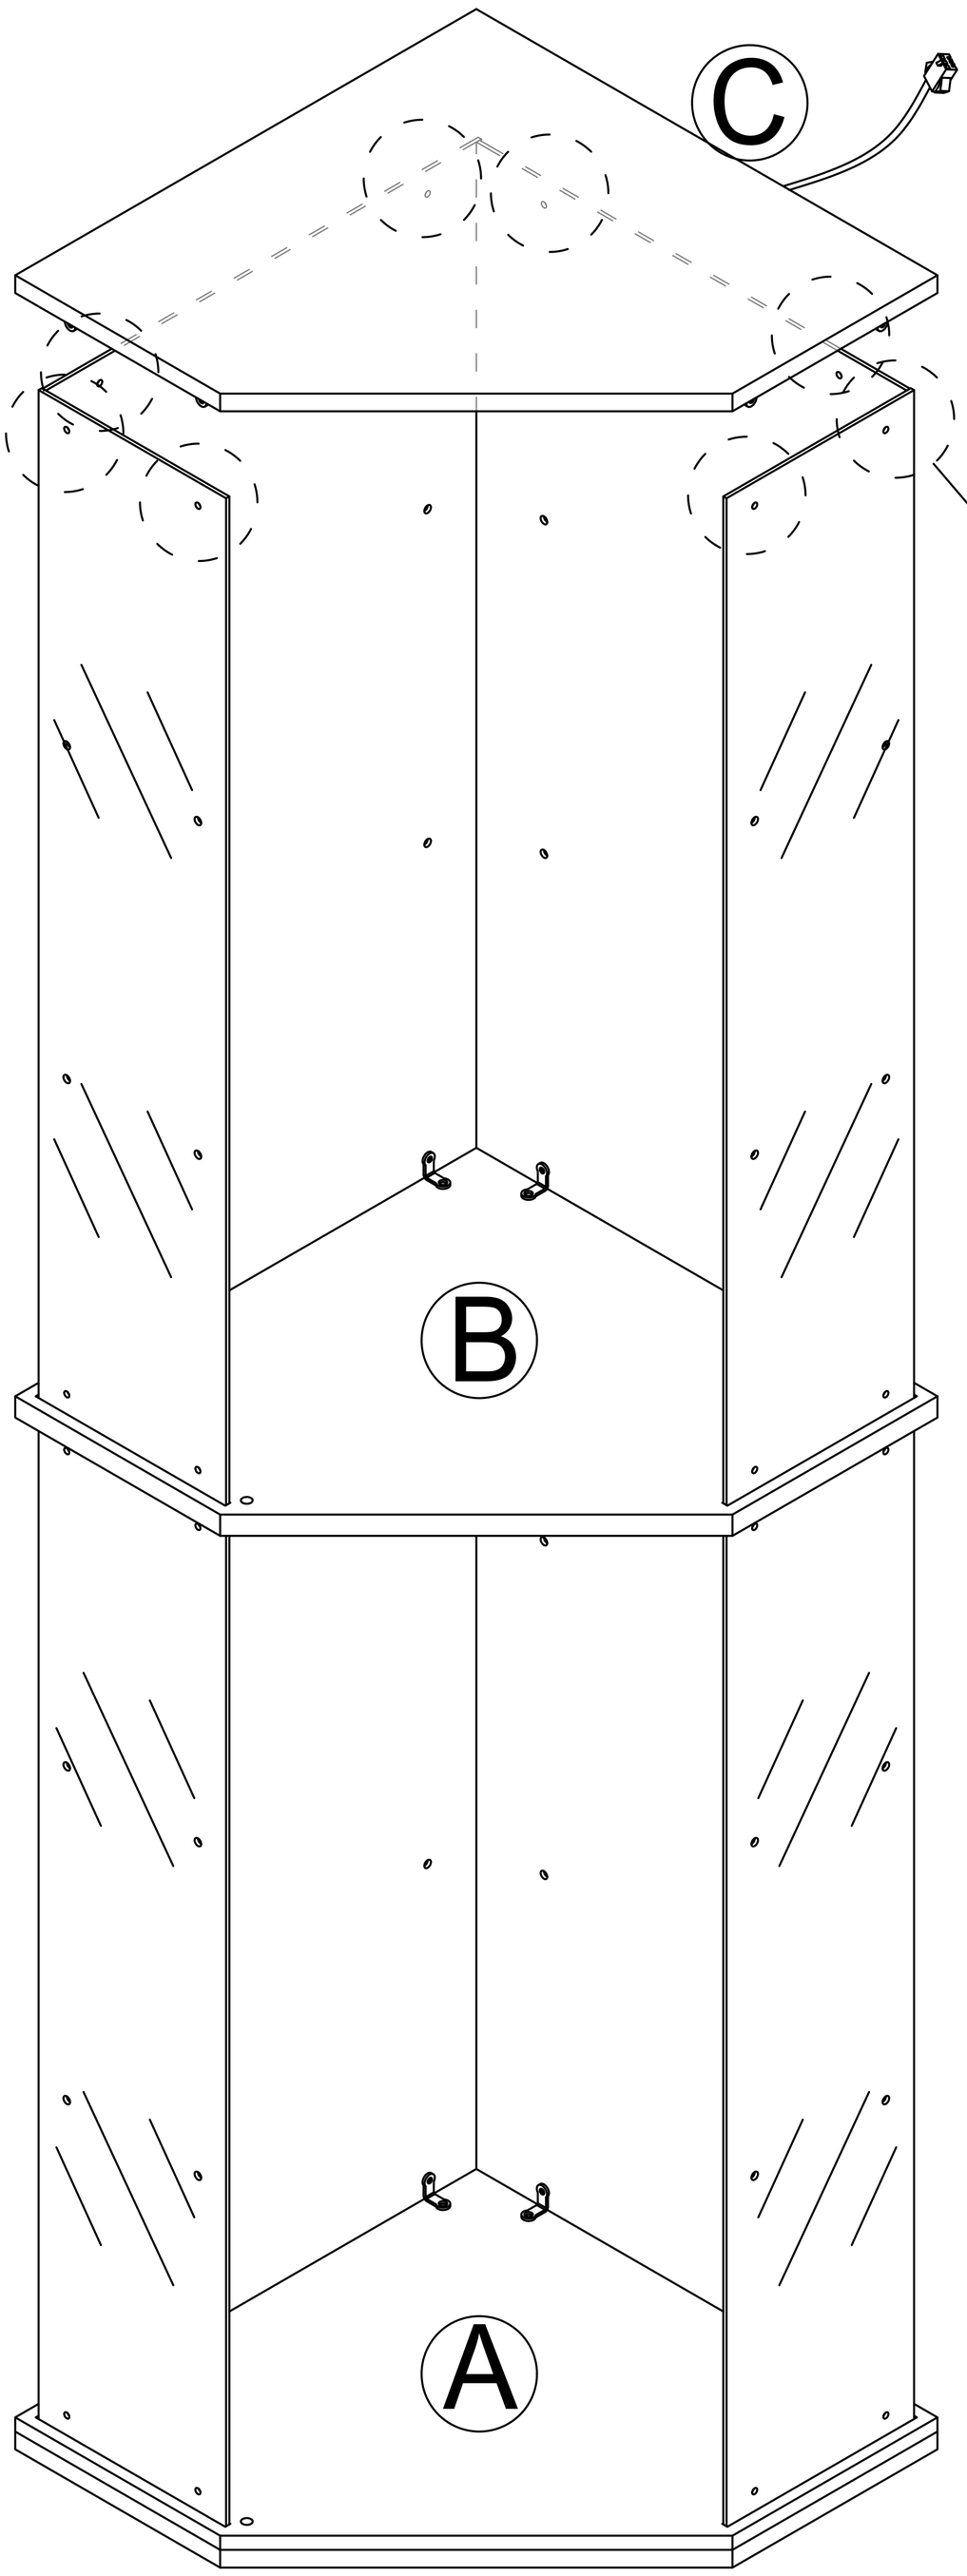


Tighten all screws.

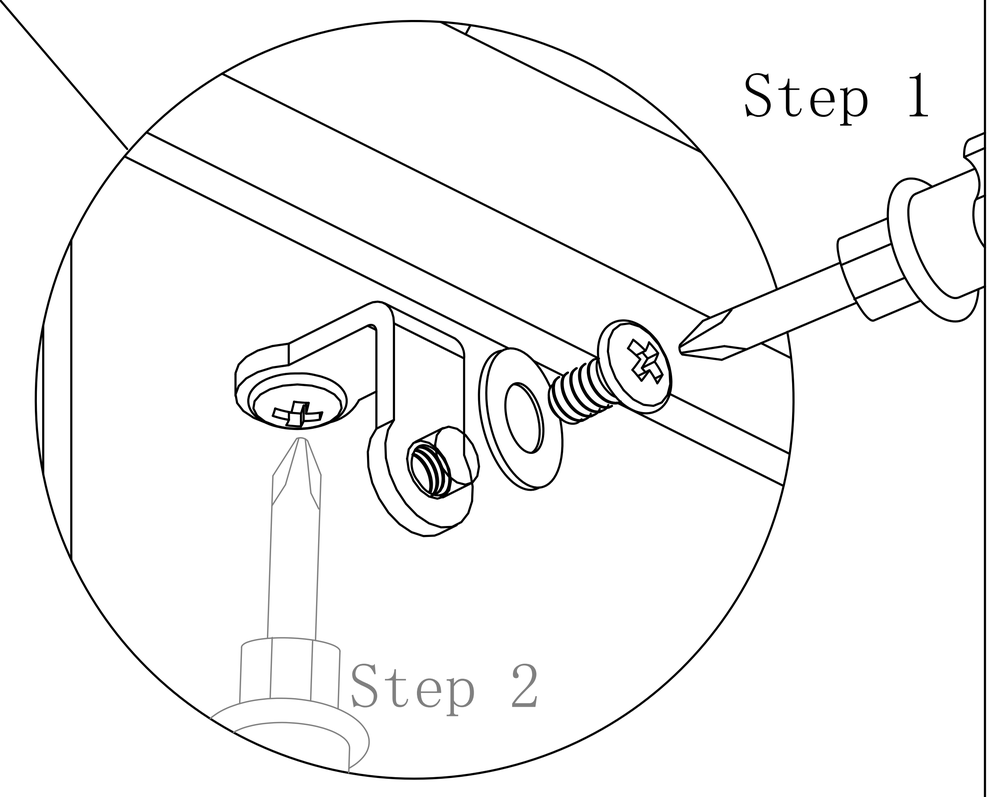


It is recommended to have two people assist with the installation.

Step 16


5




x32




x32




x32

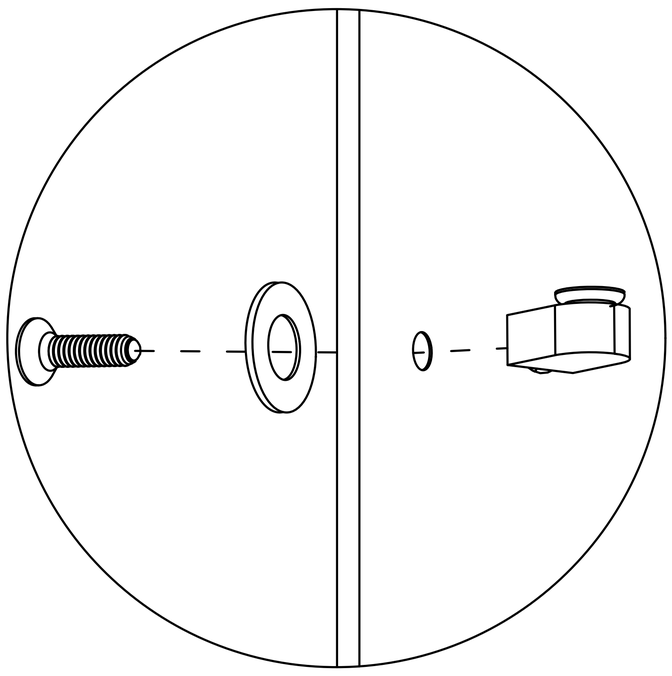


C

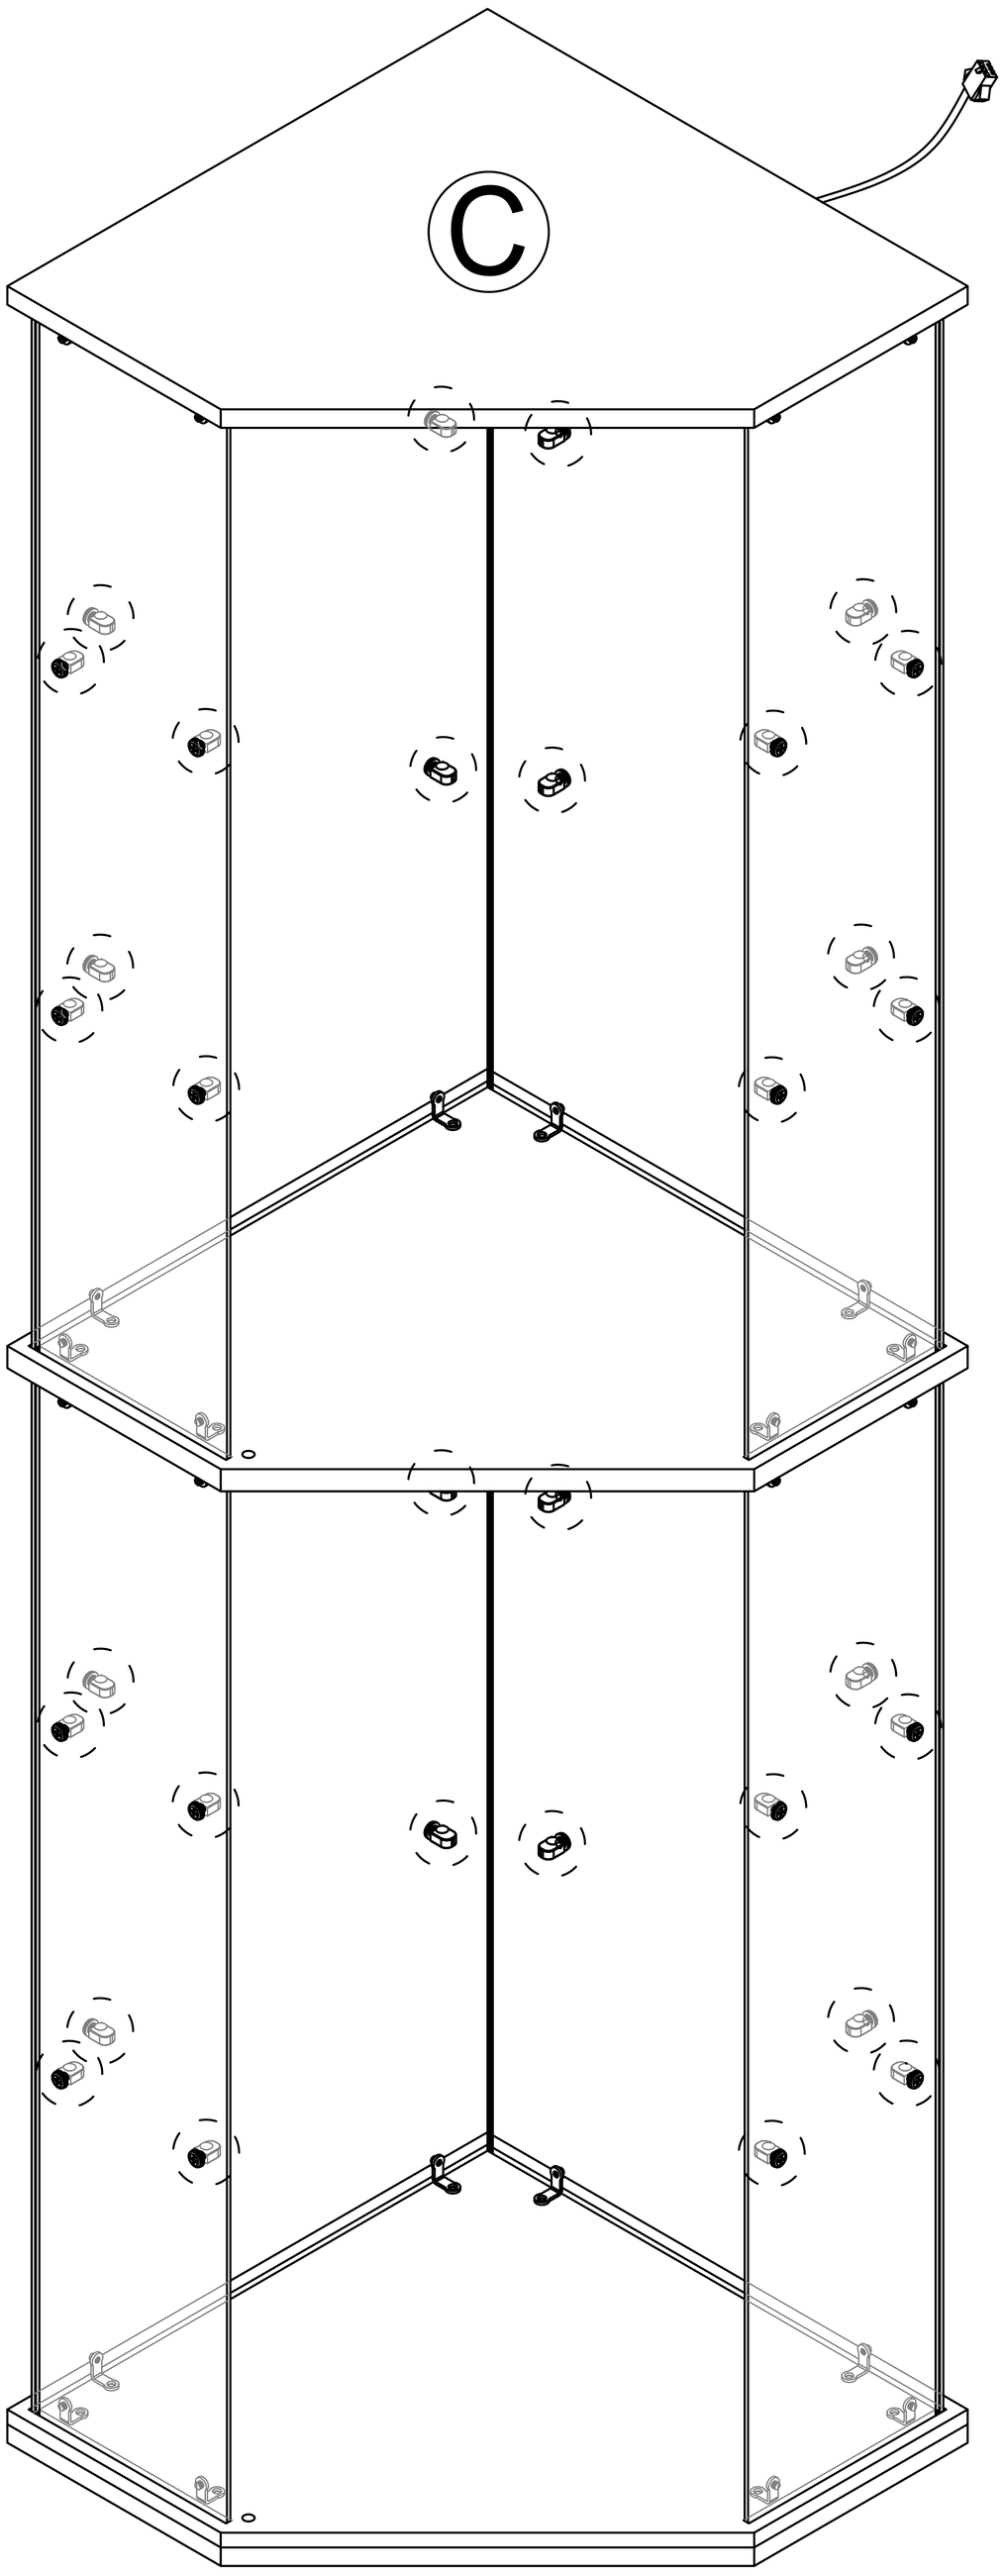

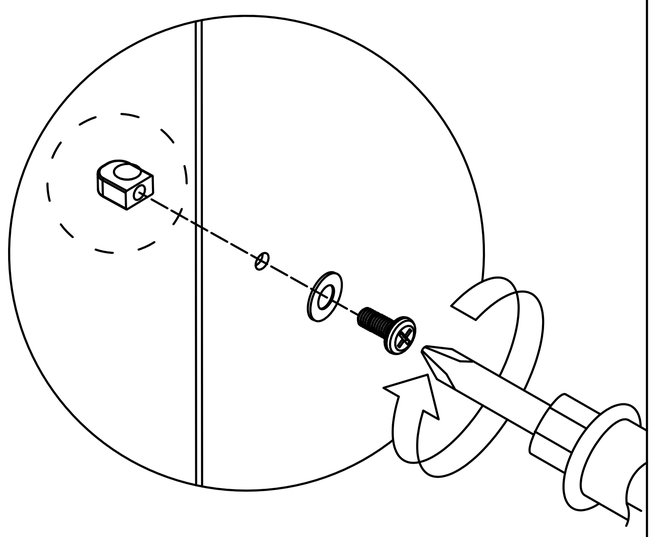


17


Step 17

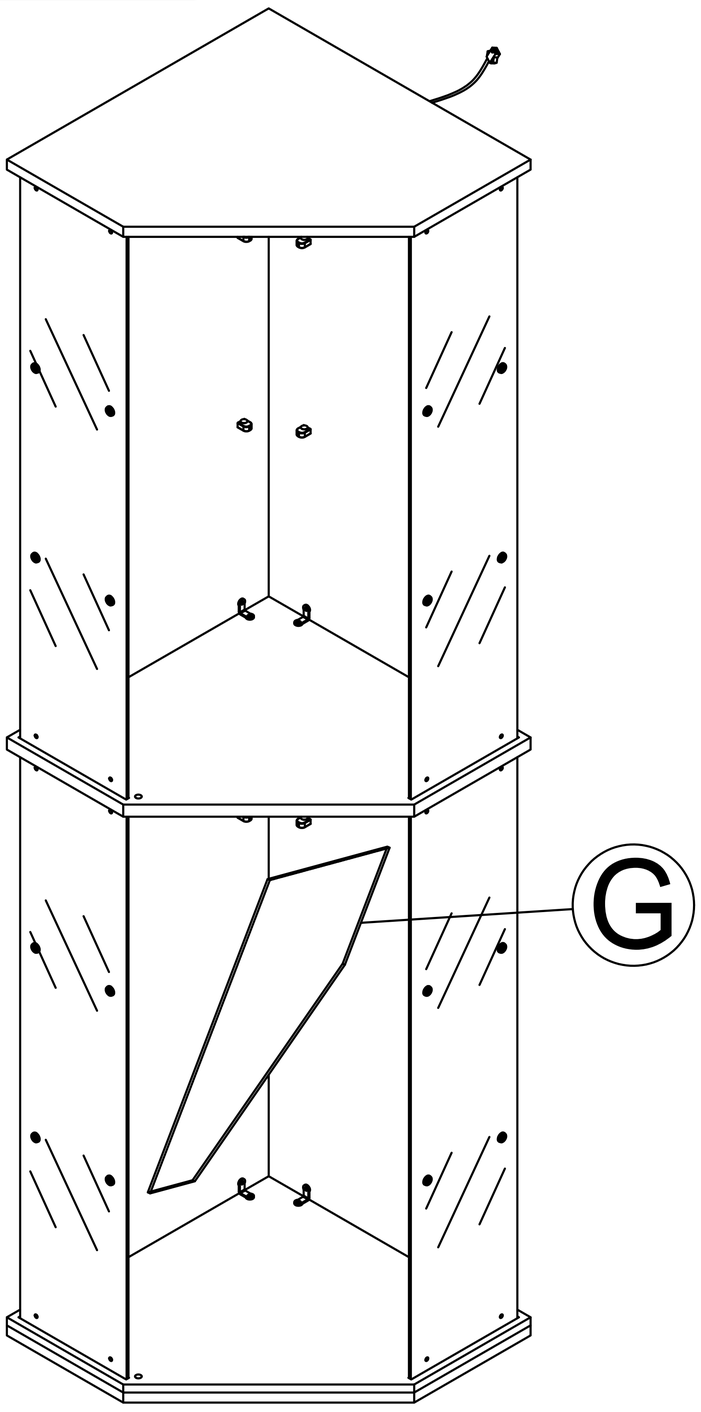


1.Put in at a certain angle

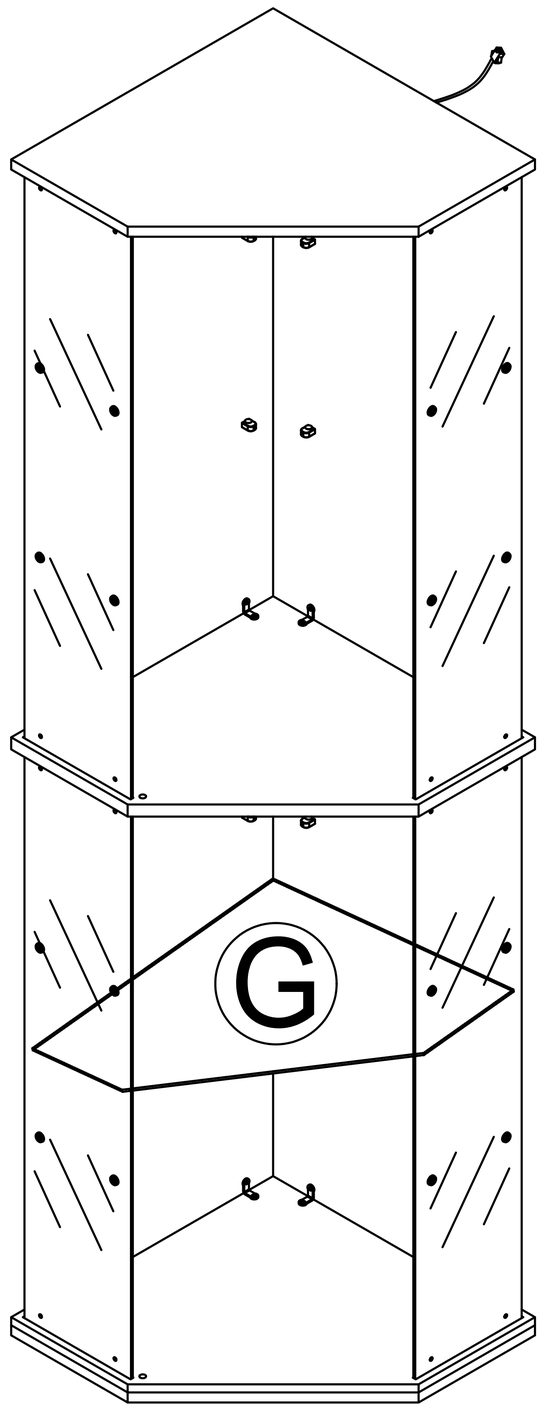

2.Rotate after fully inserted

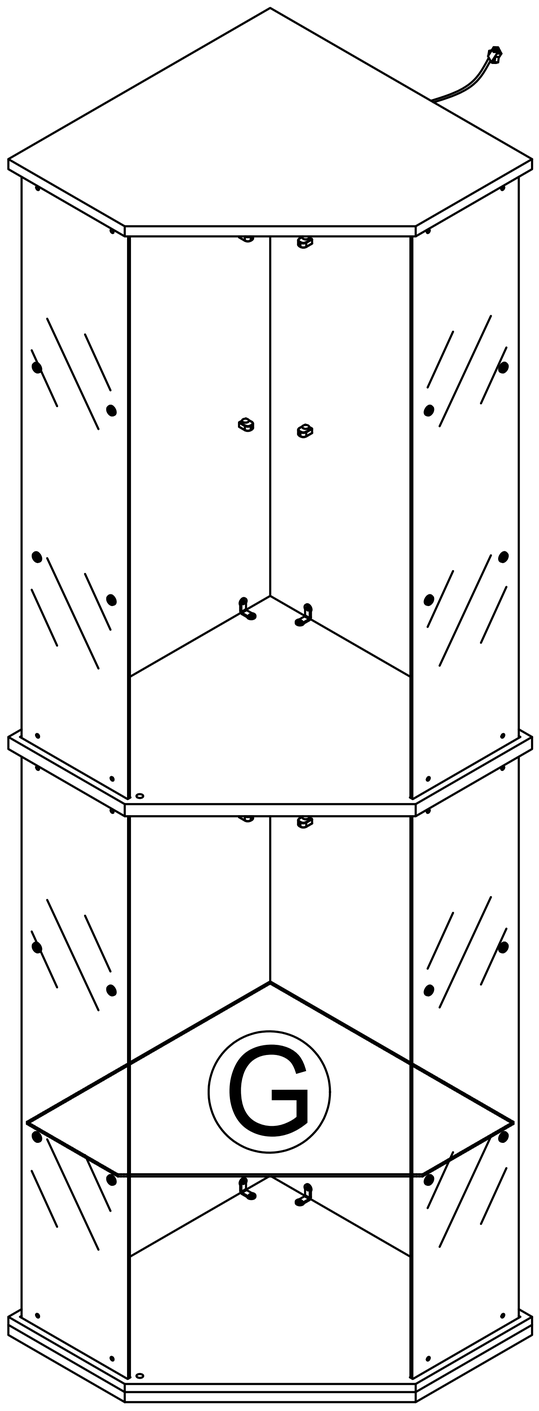



3.Lay flat

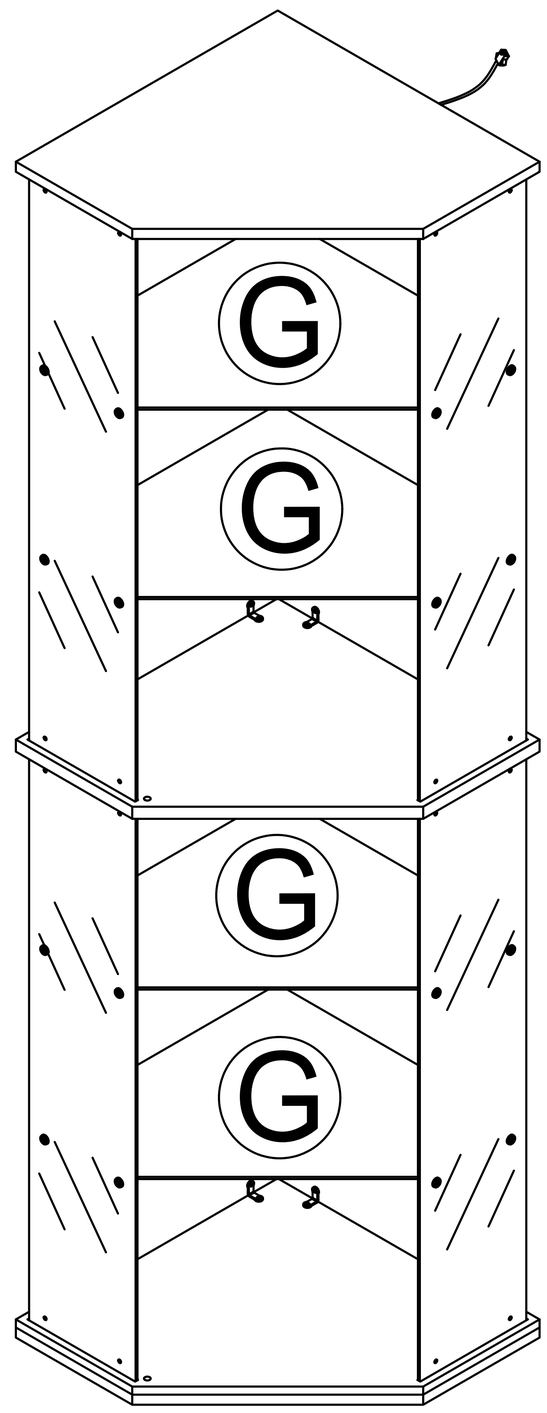



Repeat the above steps

Step 18

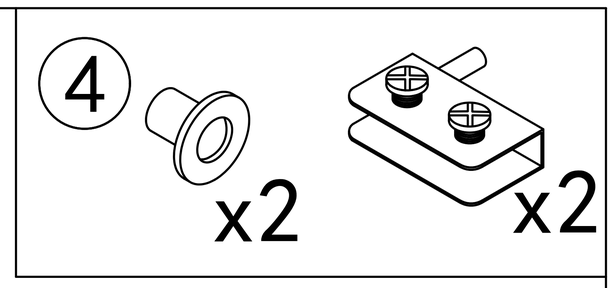

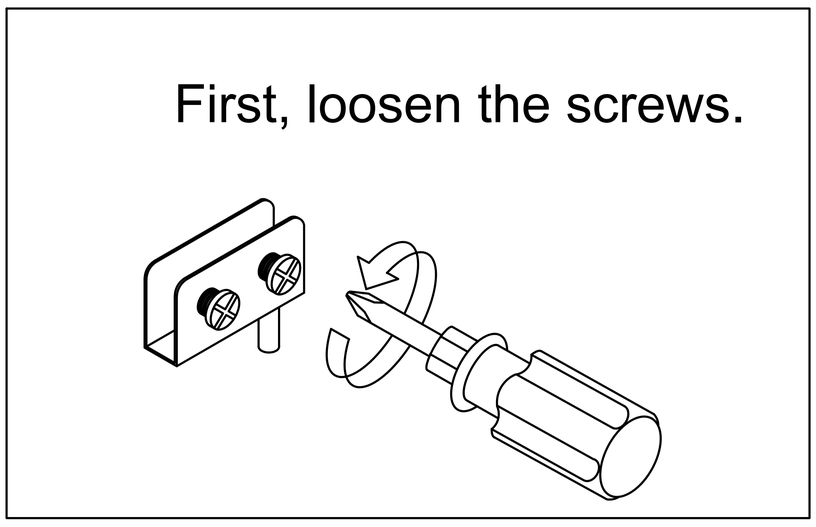

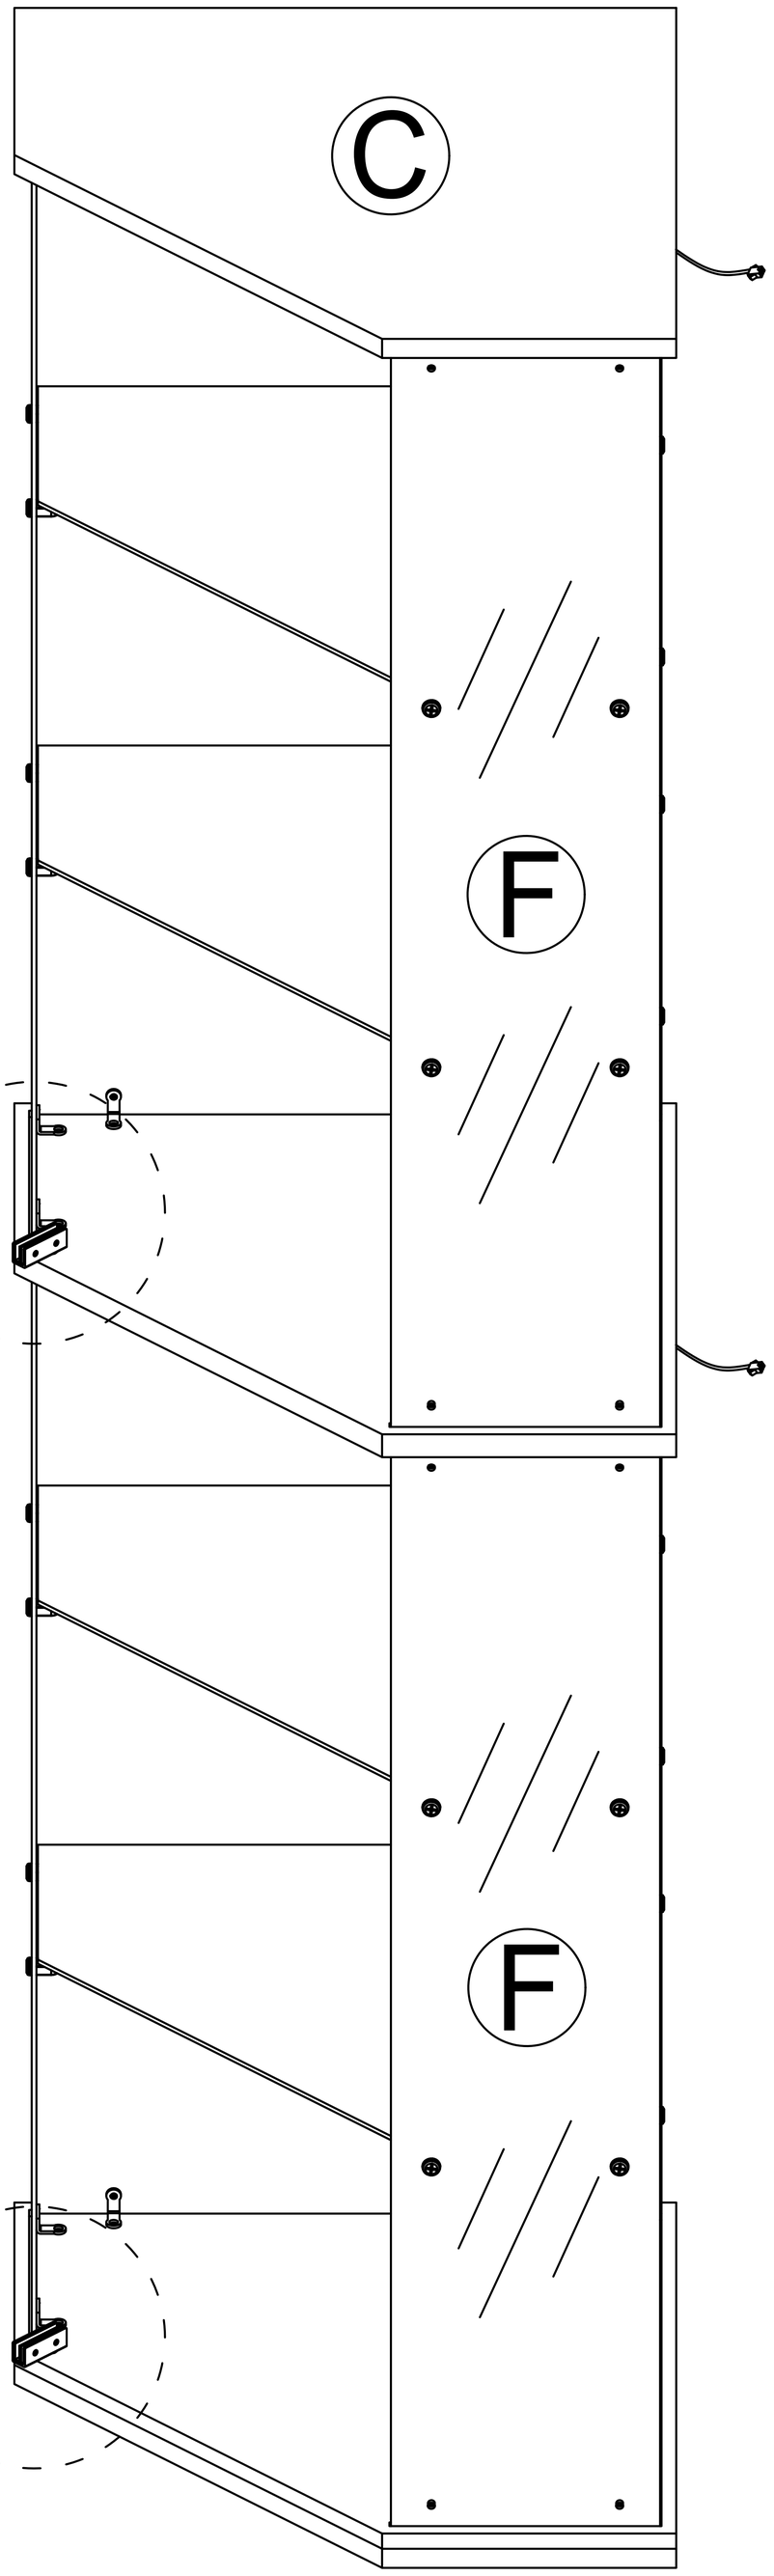


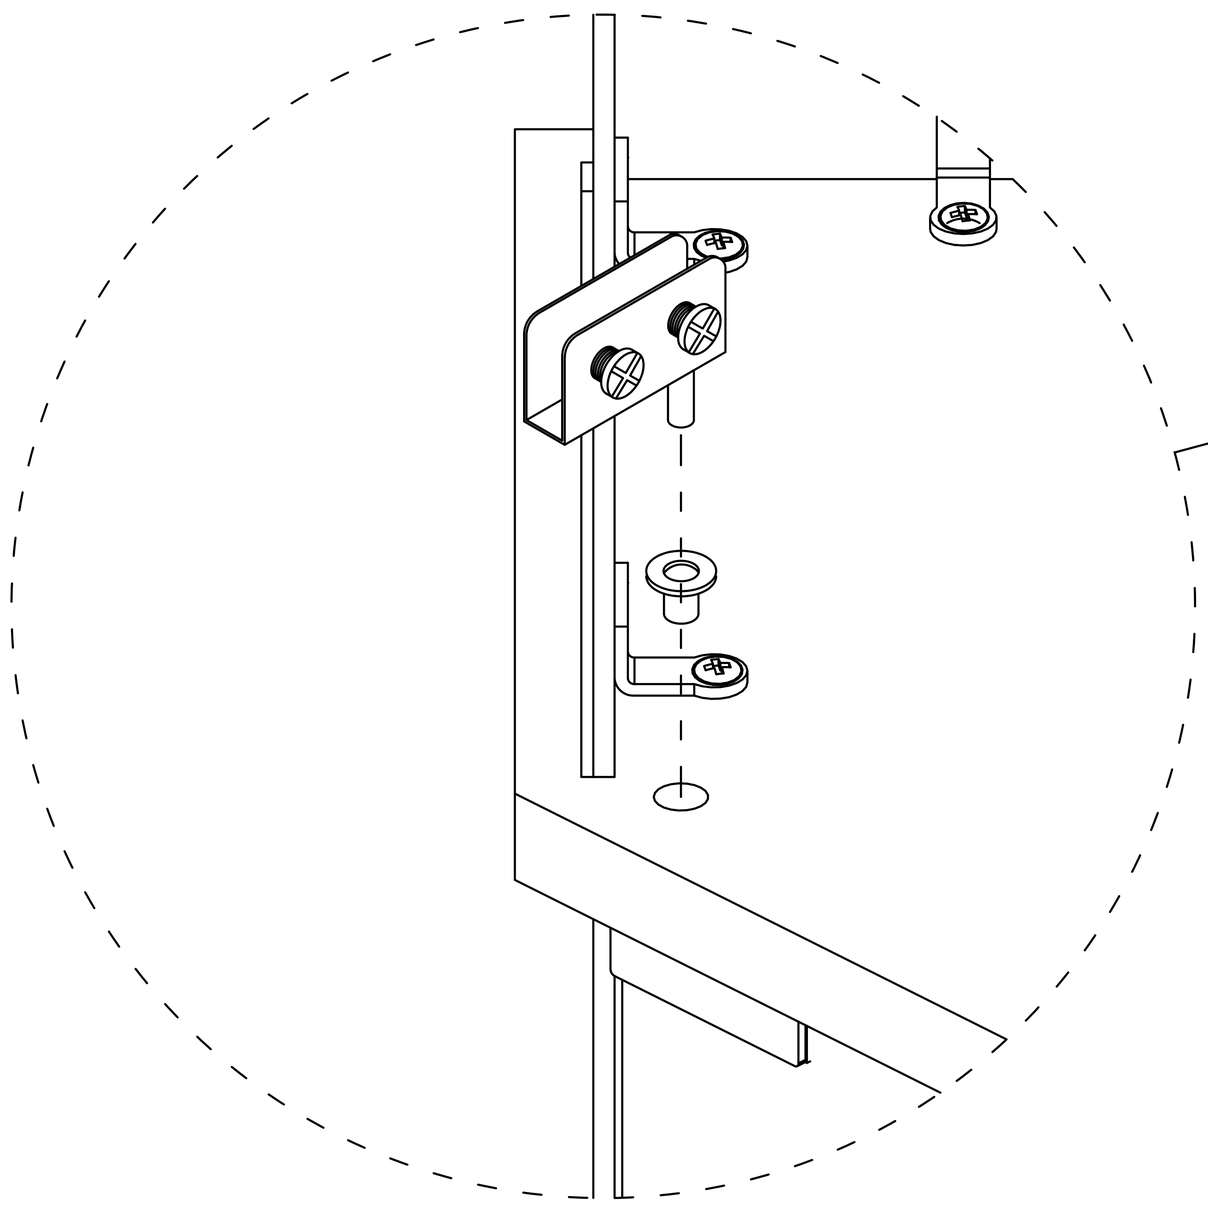


Note the orientation of the door hinge: the end with the screws faces toward the cabinet interior.


Step 19

First, loosen the screws.

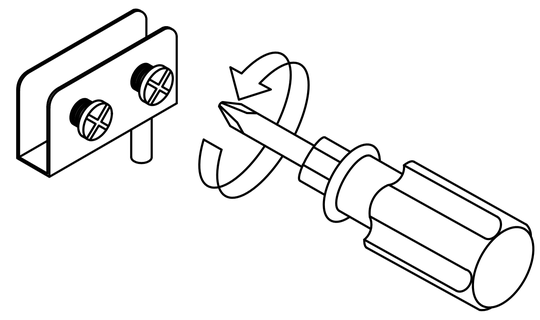

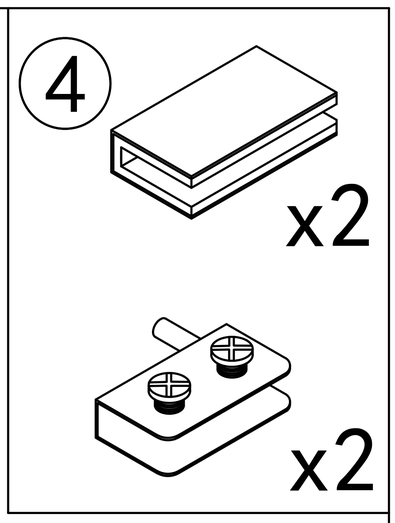

1. Take out the white pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

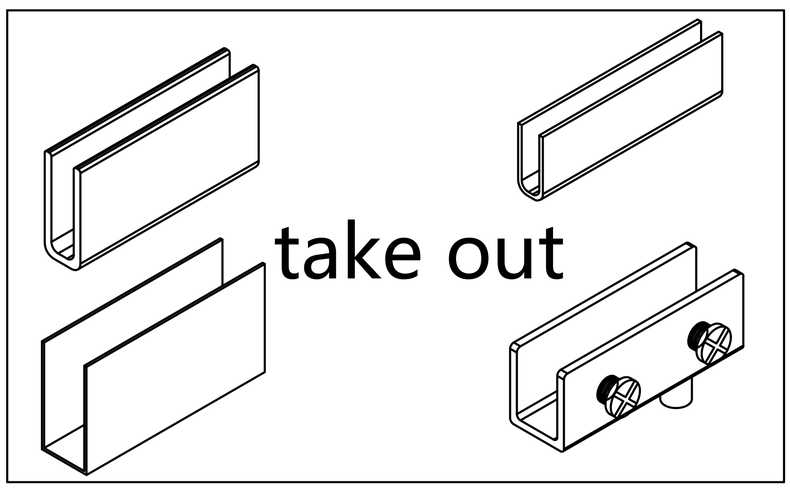

If you feel loose, please pinch
the accessory before installation


Step 20

Pay attention to the direction of the door hinge during installation




x1


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

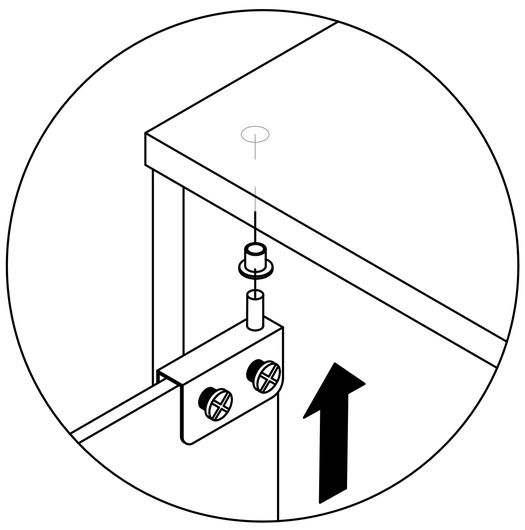

first

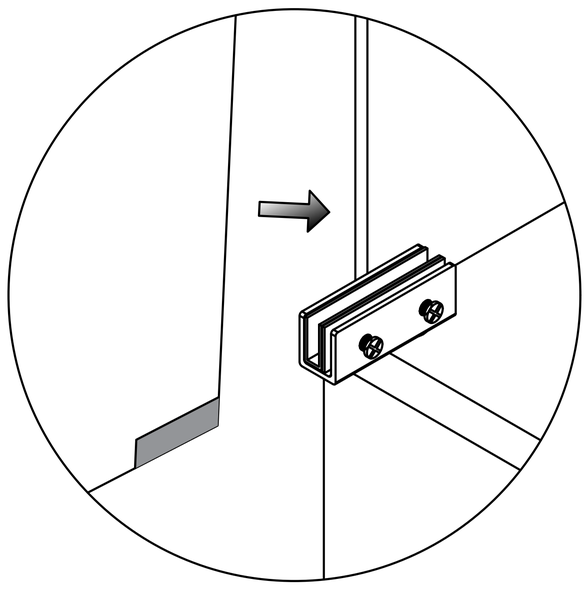


Remove white pad

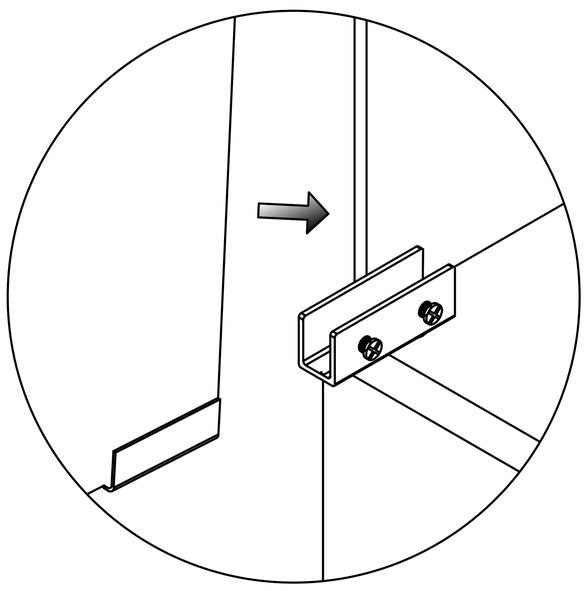

Fit the pad around glass edge


second

Insert the glass into the door hinge's slot.

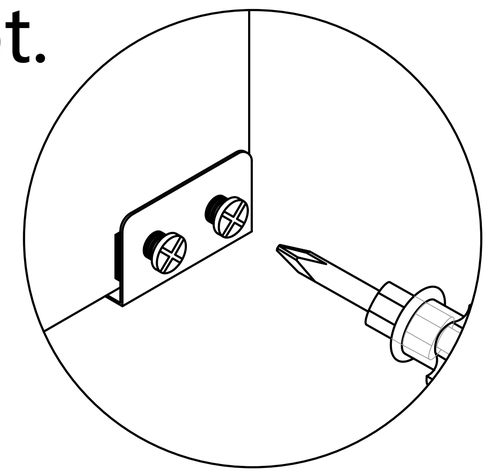

third

Locking screw

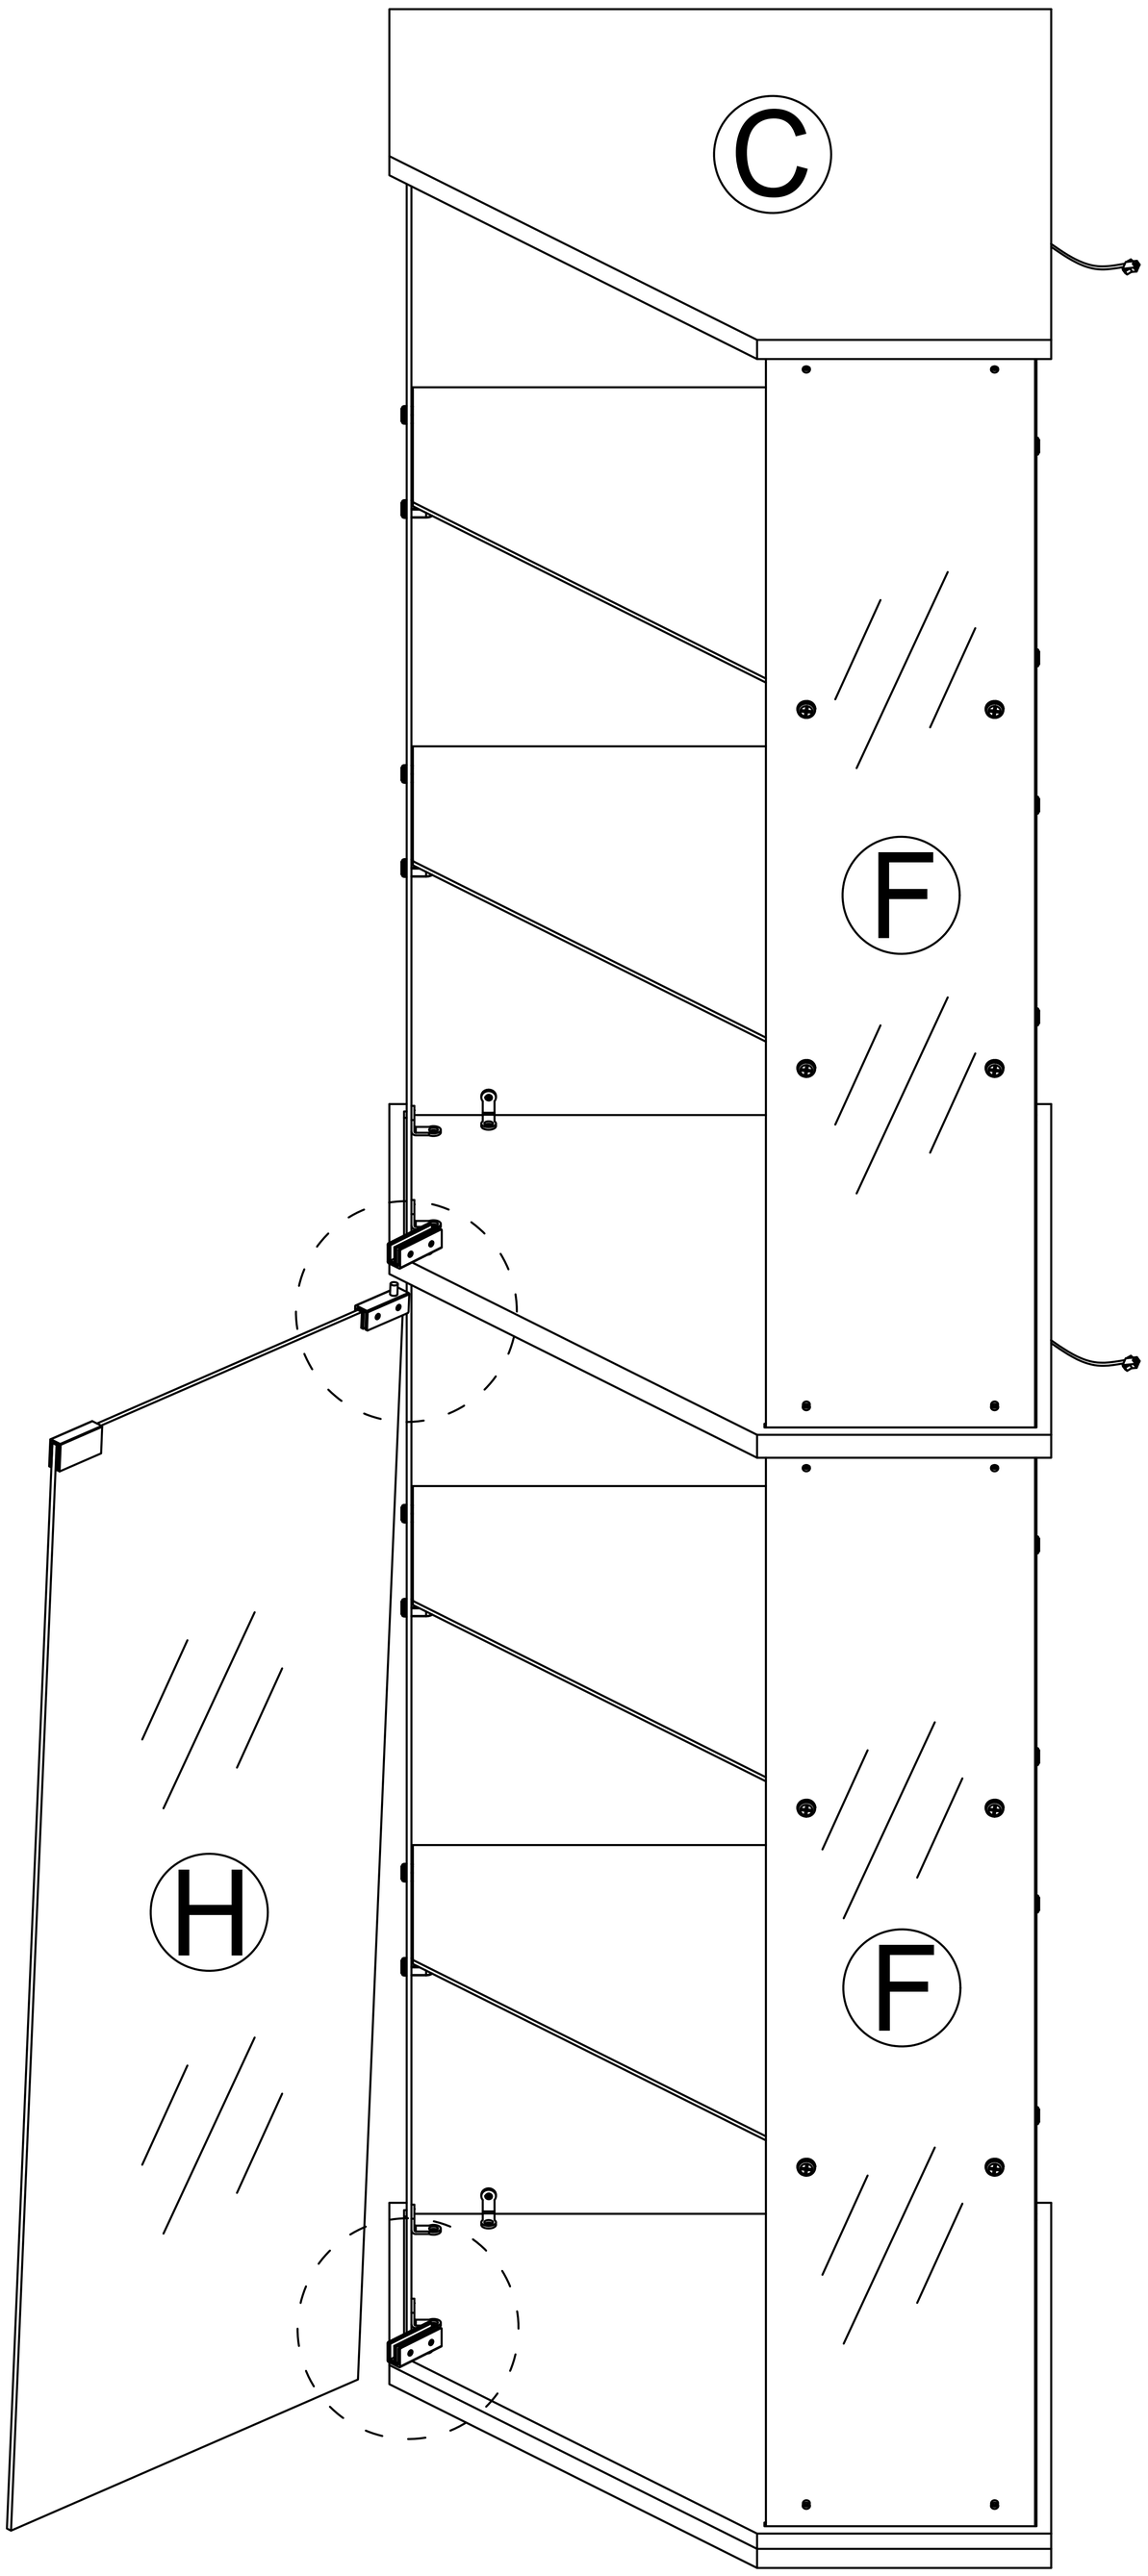


Step 21


Pay attention to the direction of the door hinge during installation

④ x1


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

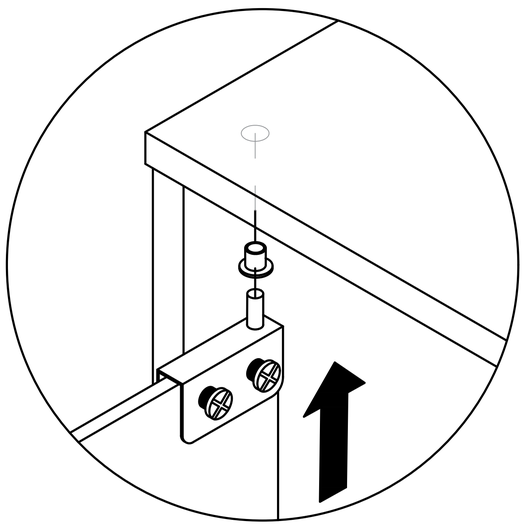

first

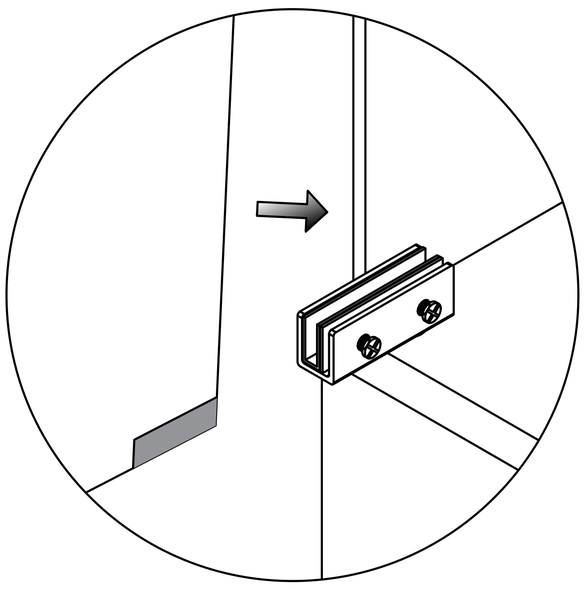

Remove white pad

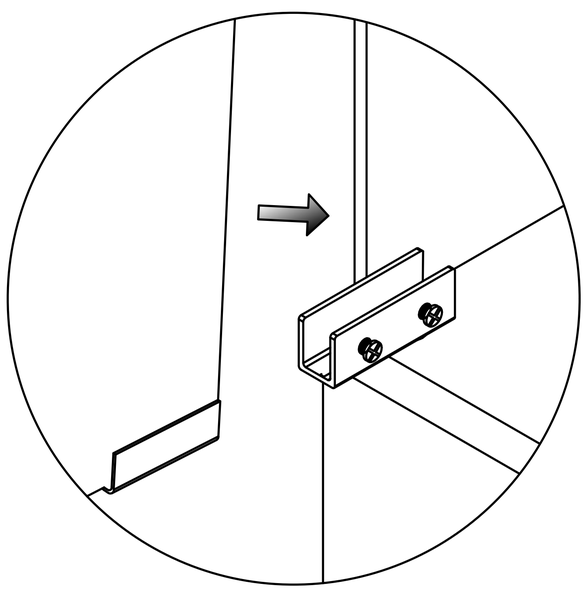


Fit the pad around glass edge

second


Insert the glass into the door hinge's slot.

third


Locking screw

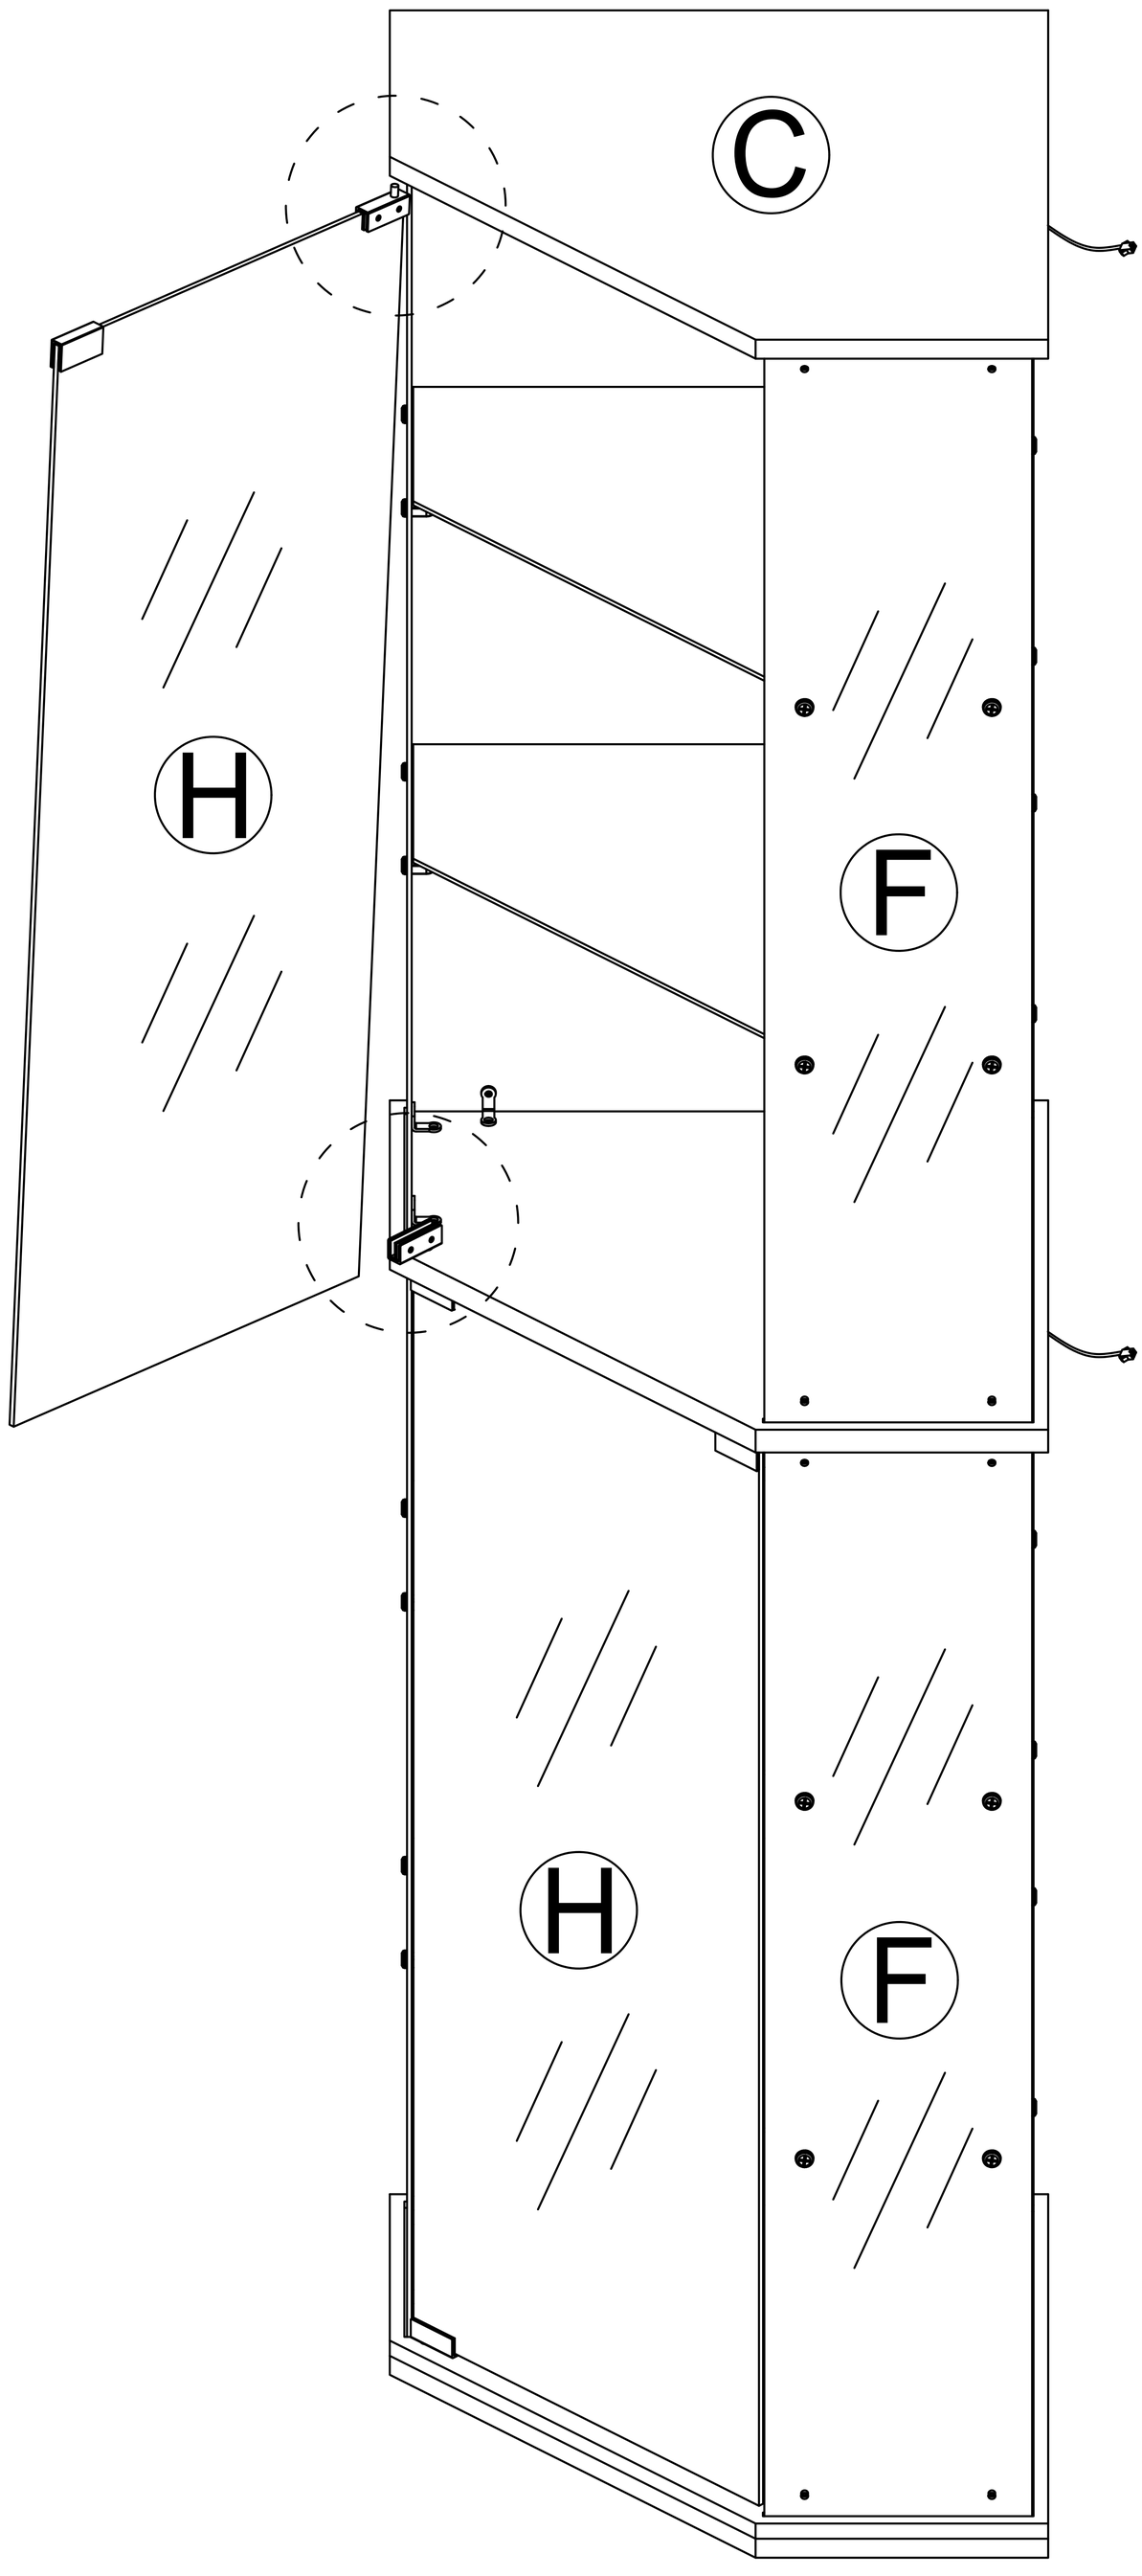


Step 22

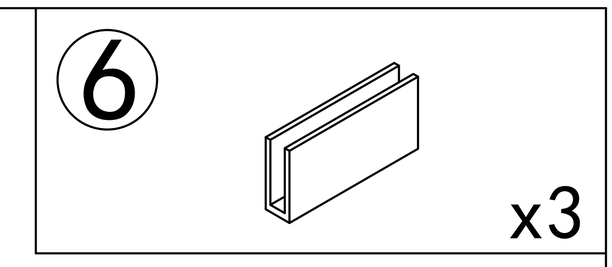



Behind the cabinet, insert the cable clips into the glass

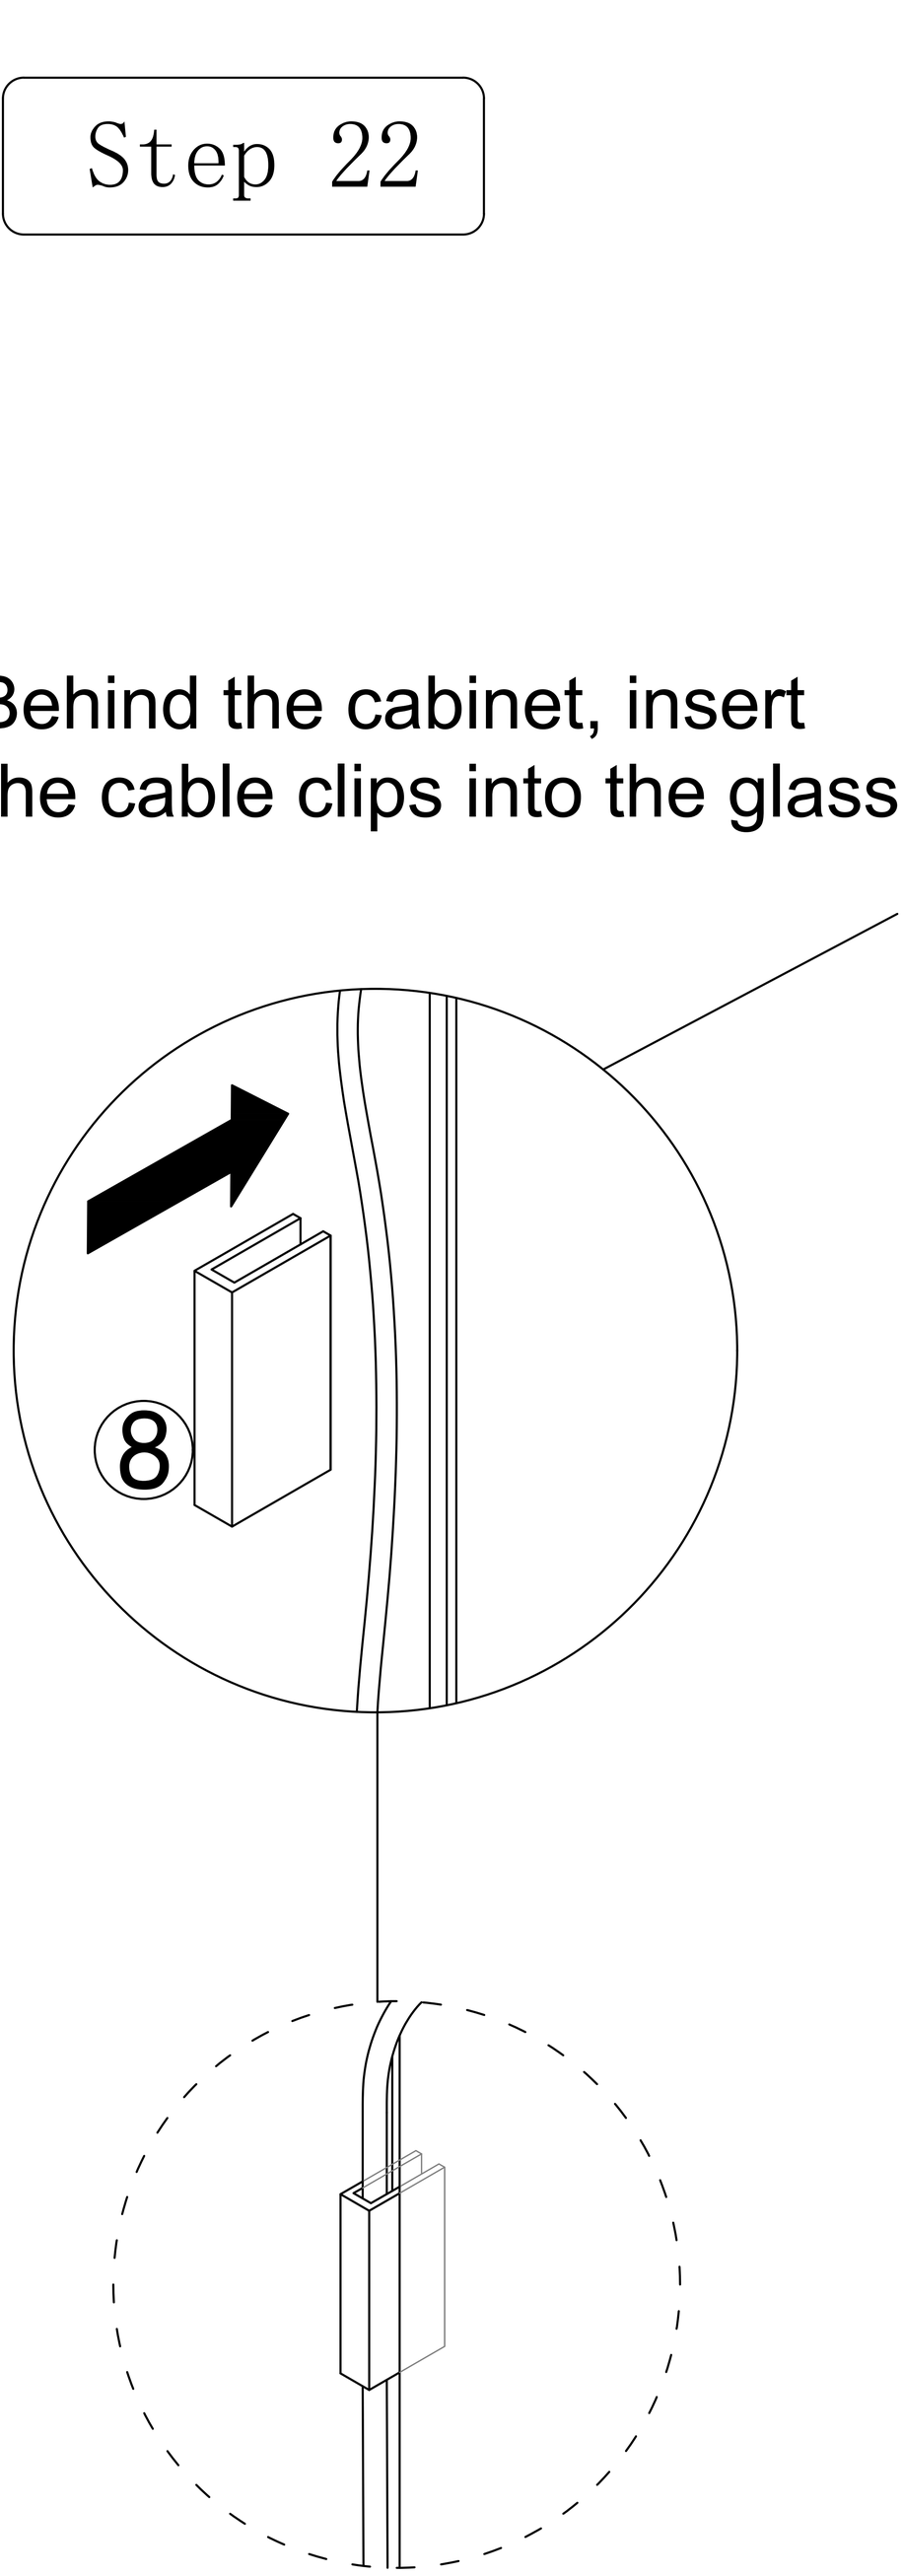

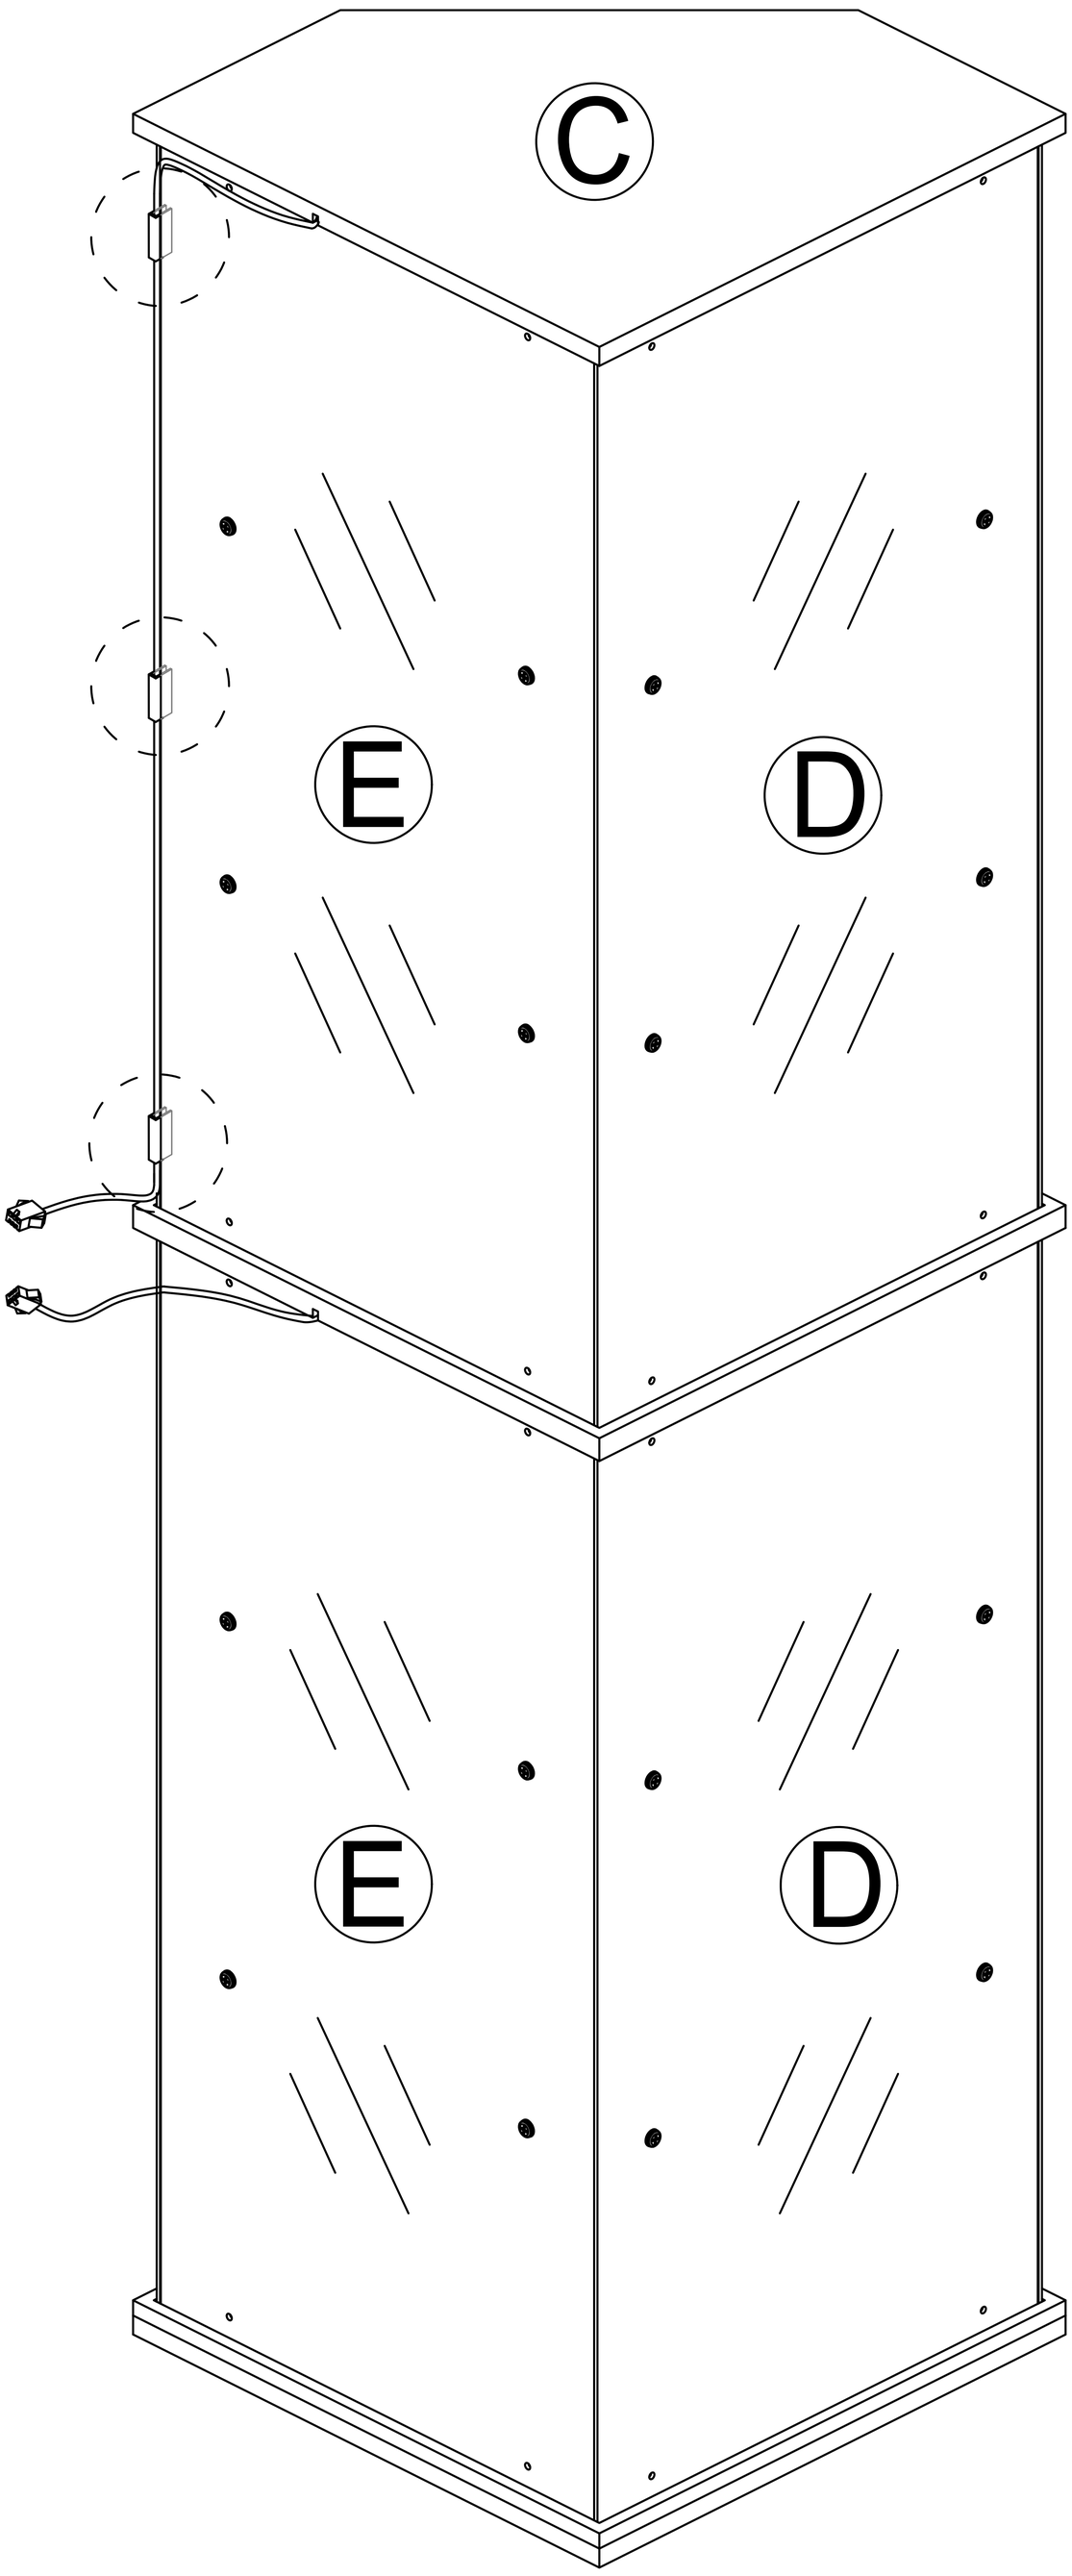


Step 23

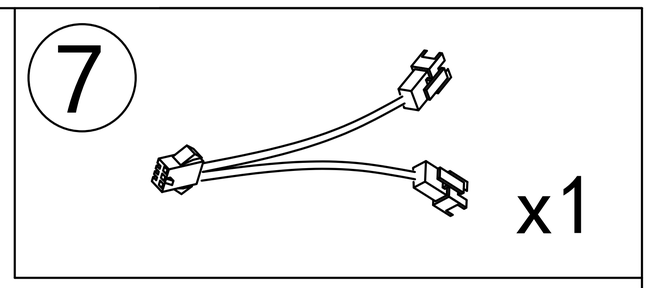

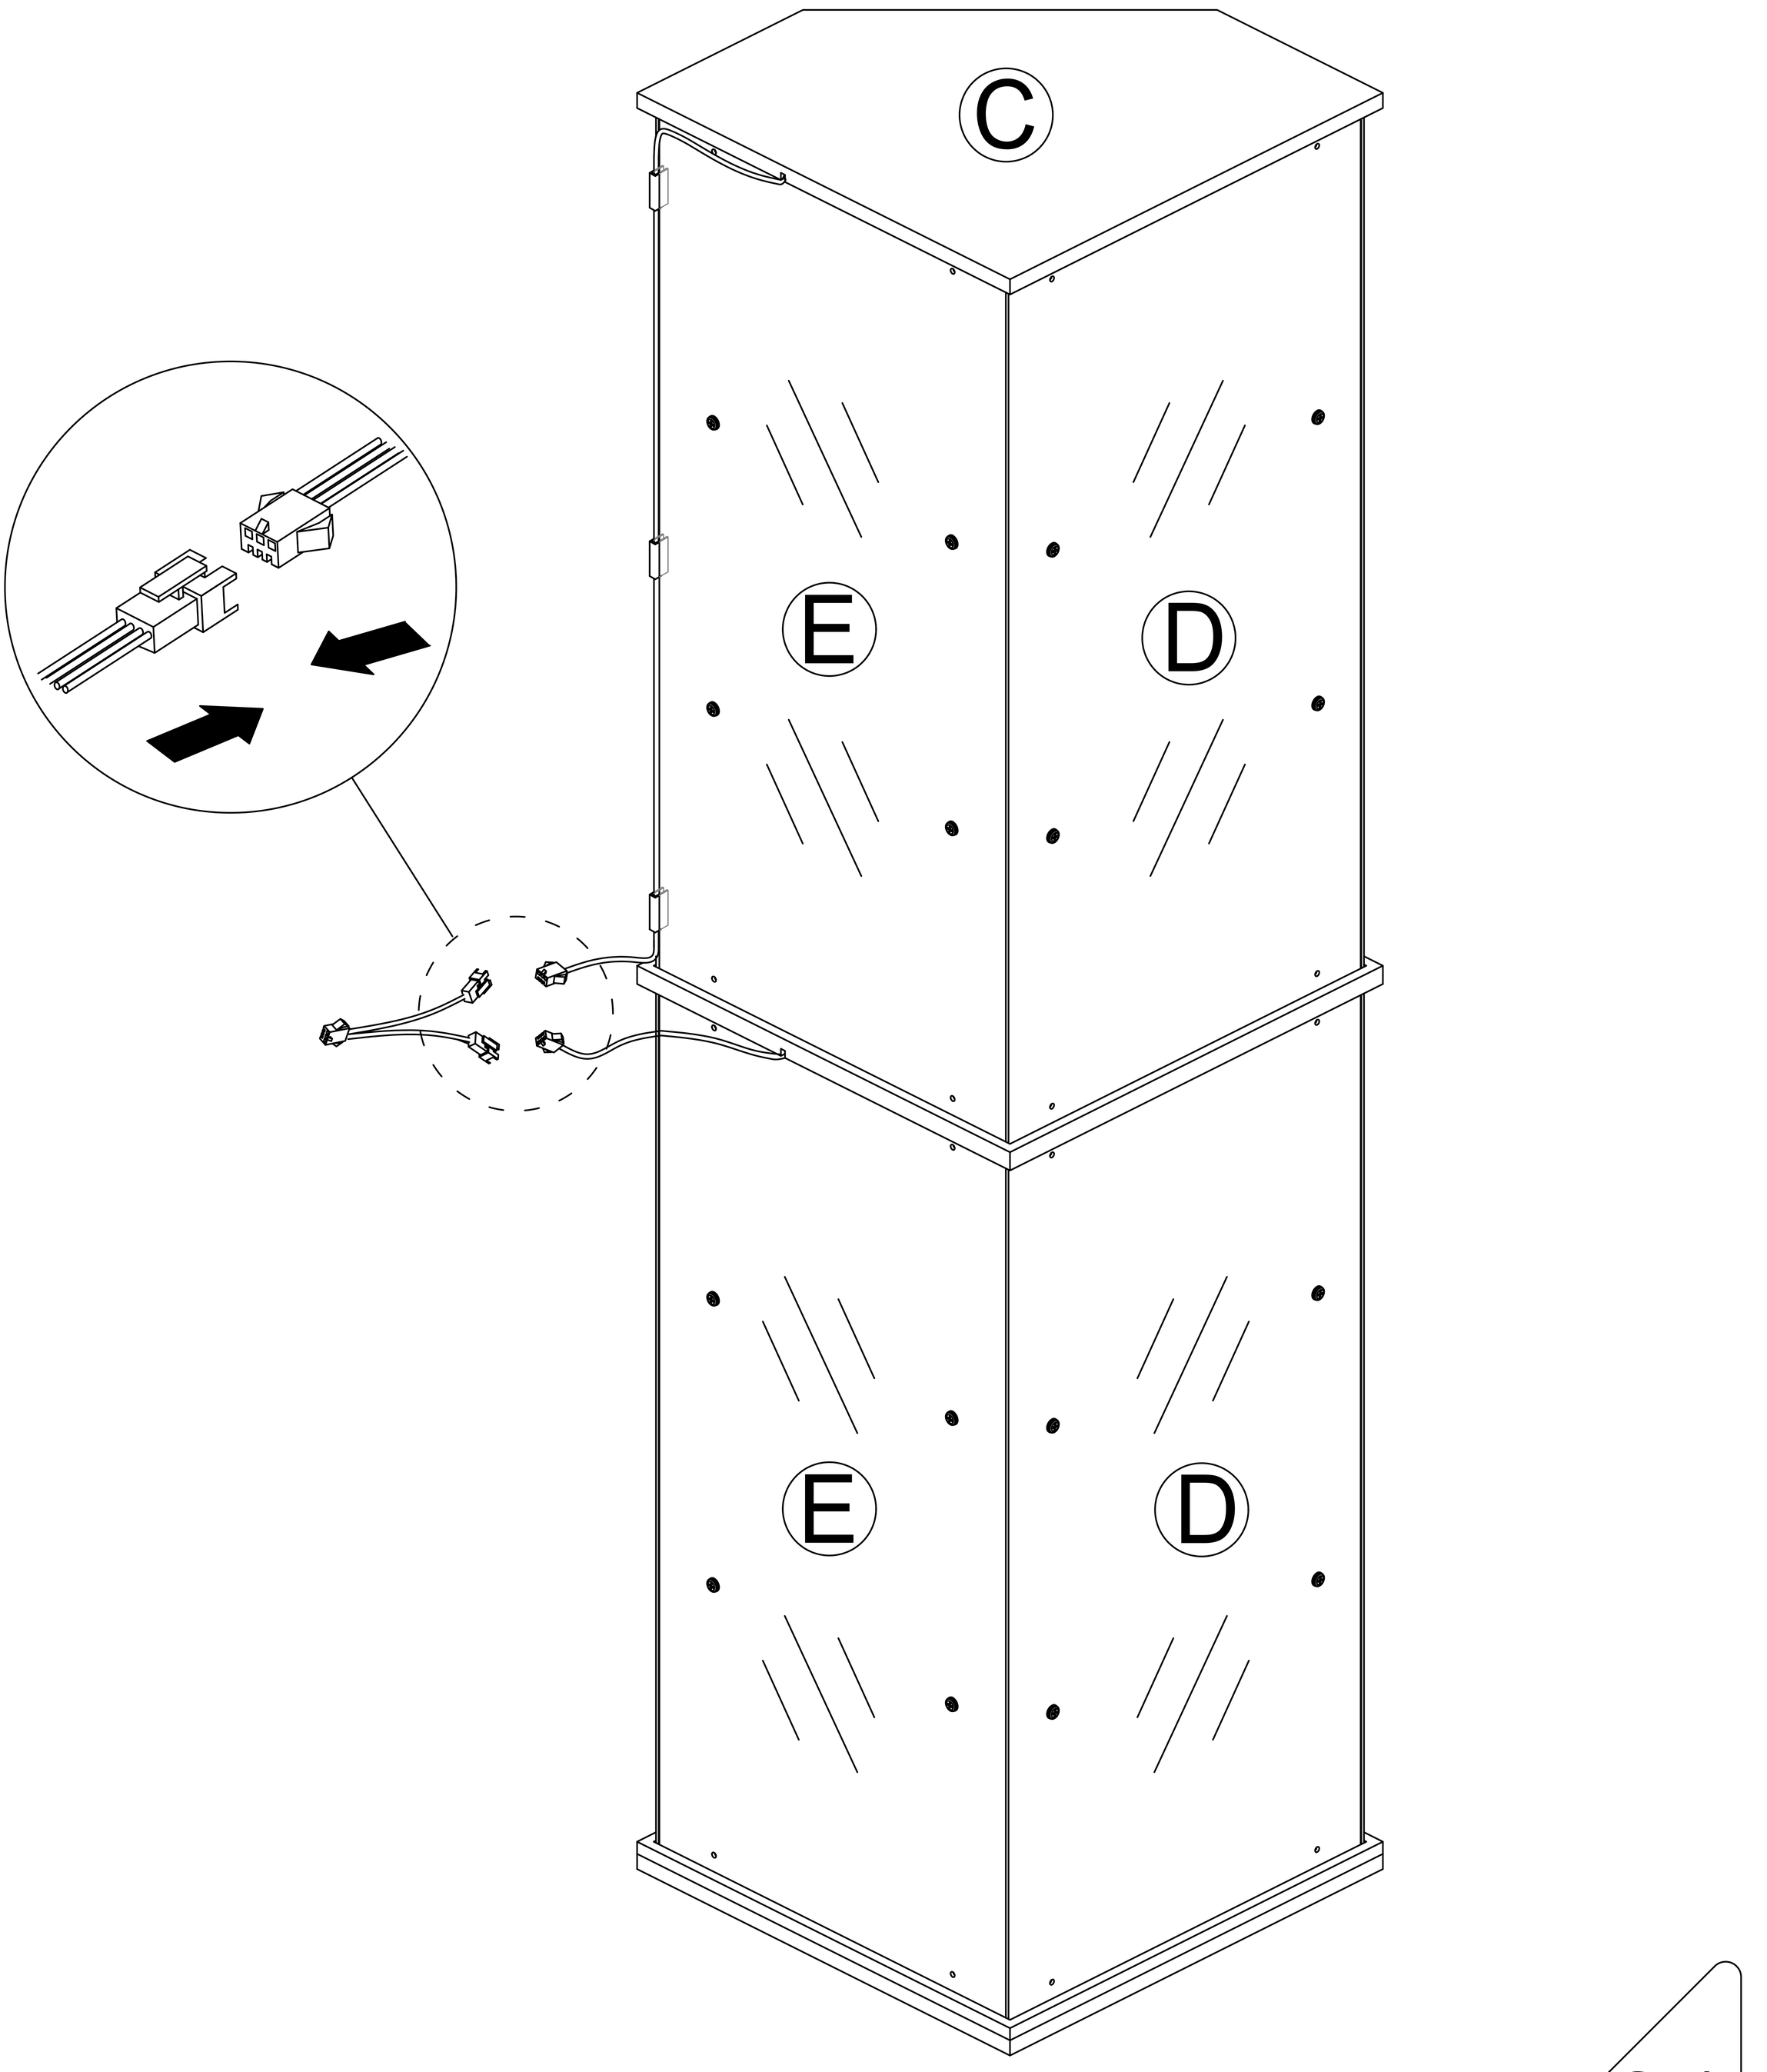


Step 24


8




x1

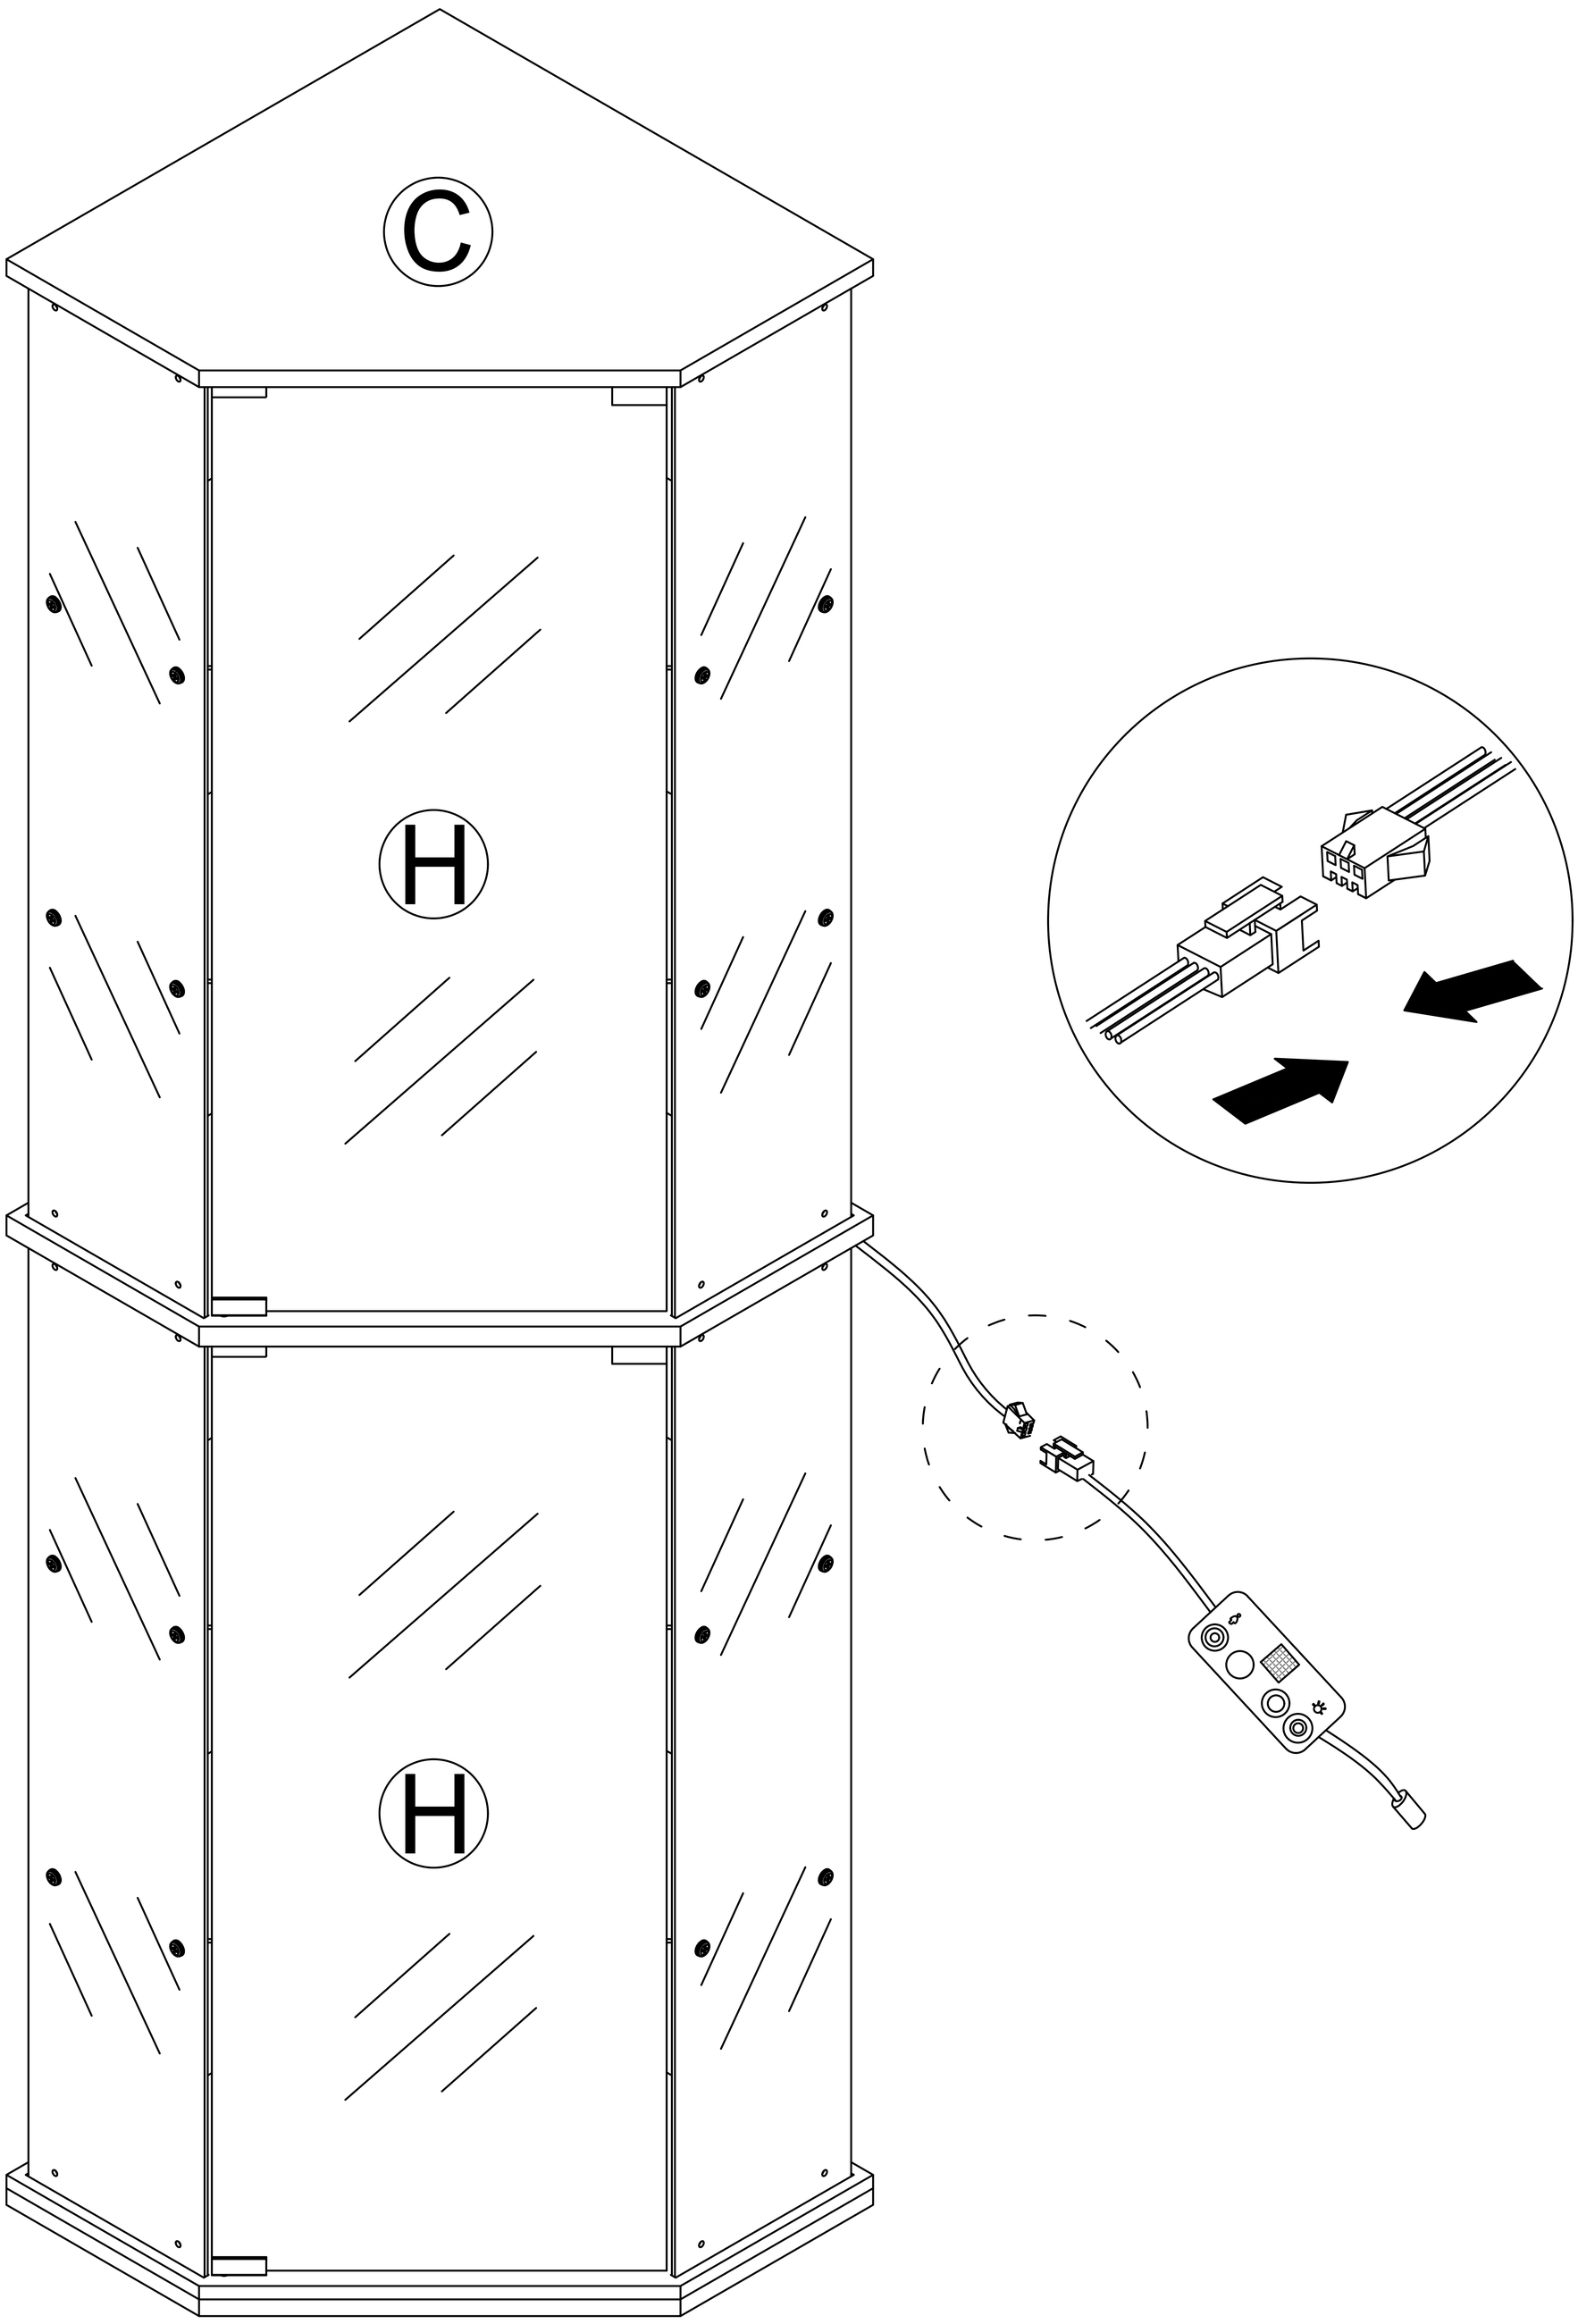



Step 25



x1

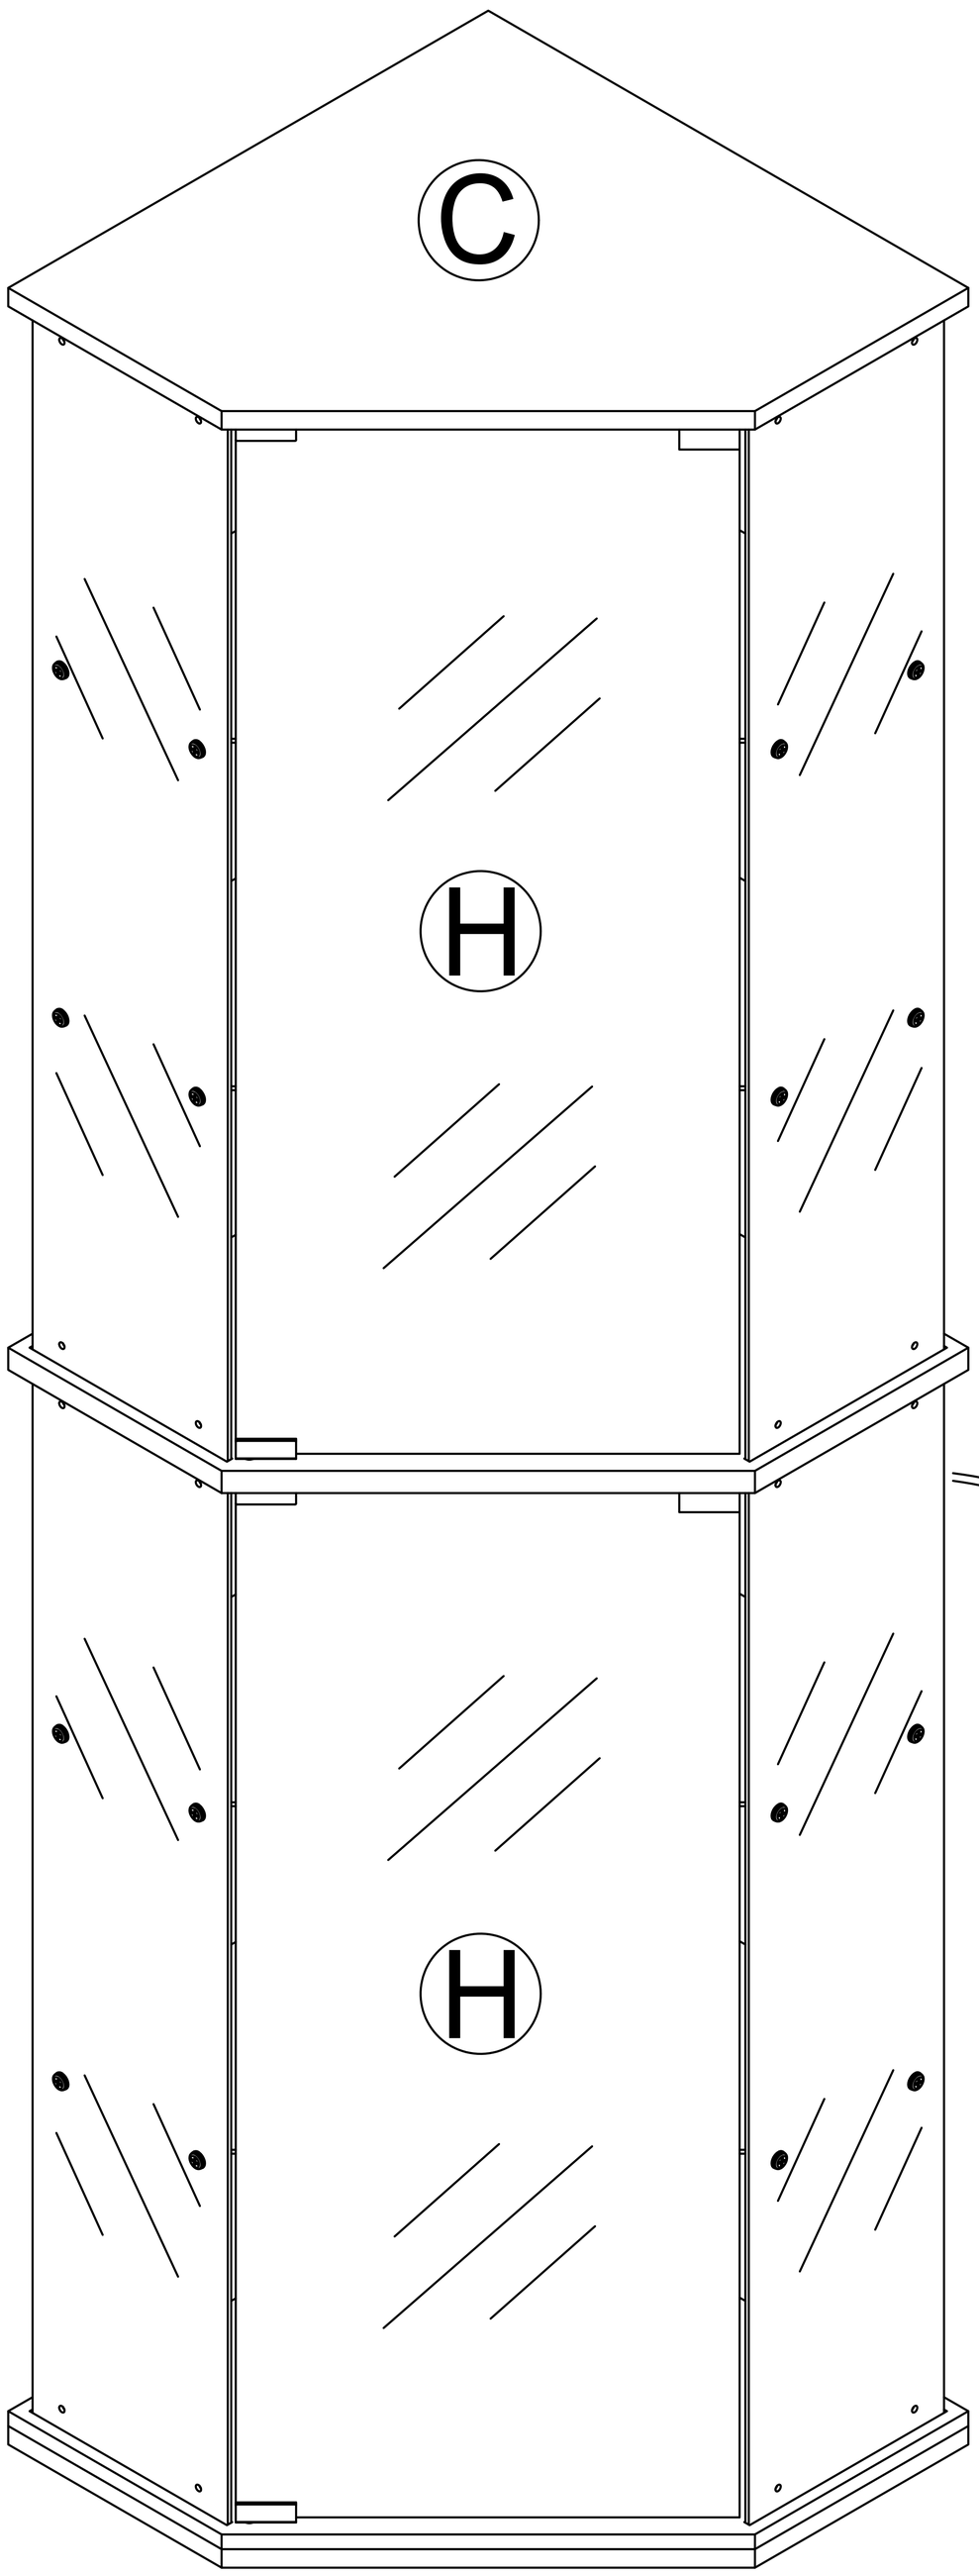

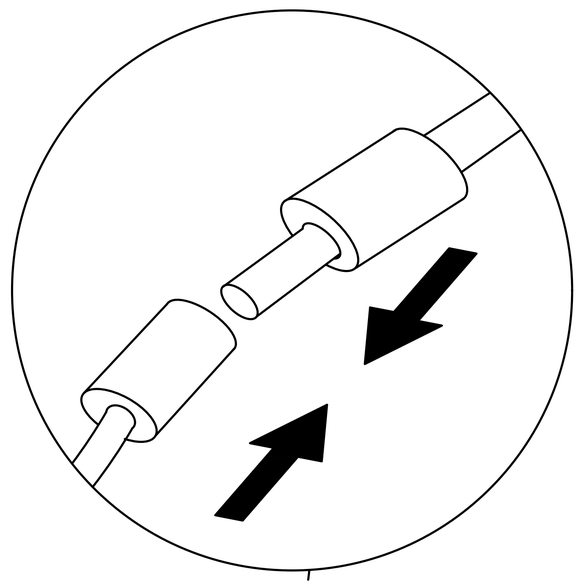

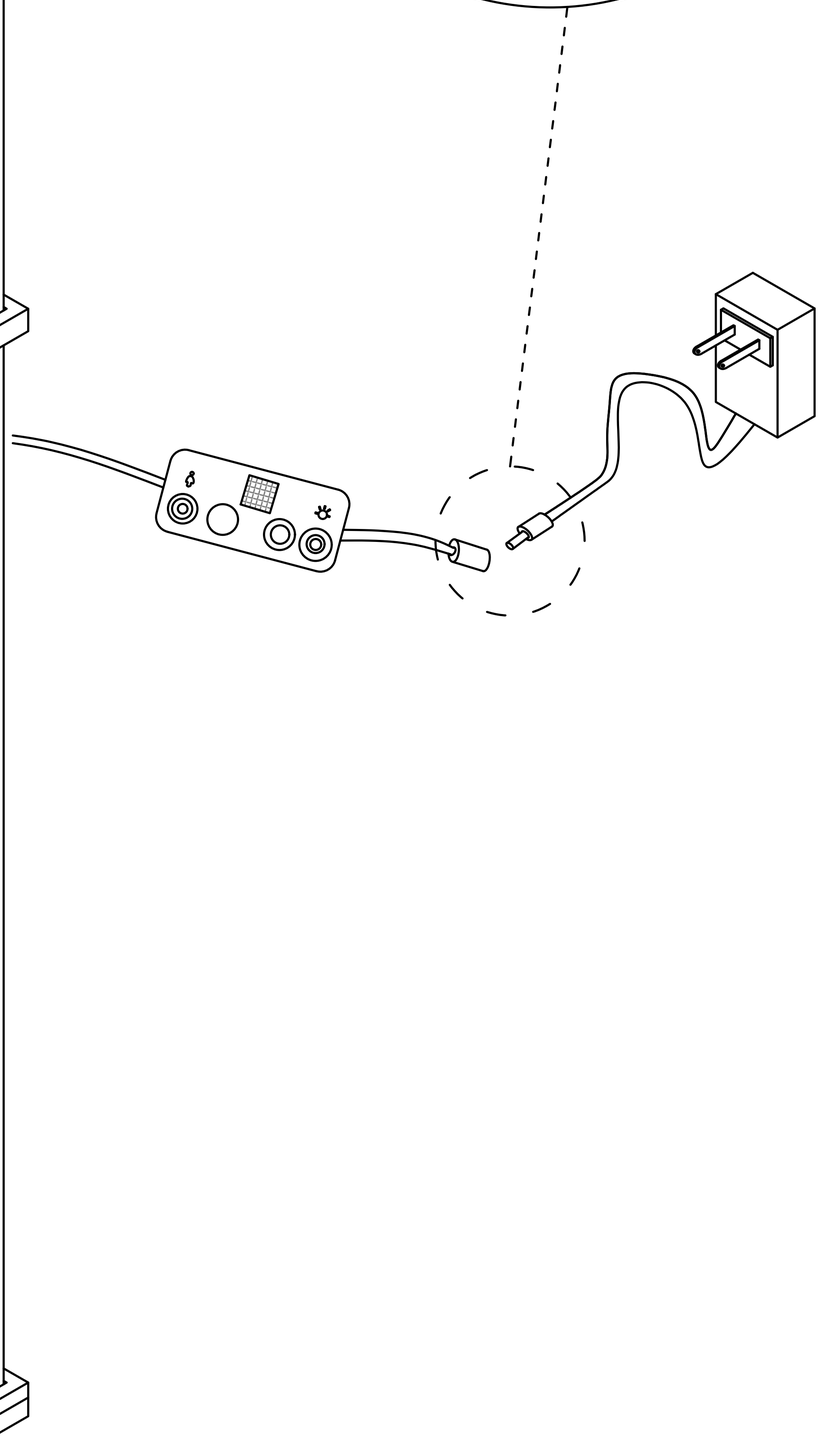

Step 26

Install as required


9

x2


x2


x2


3.5x14mm



Install the anti fall hardware on the cabinet as shown in the picture first

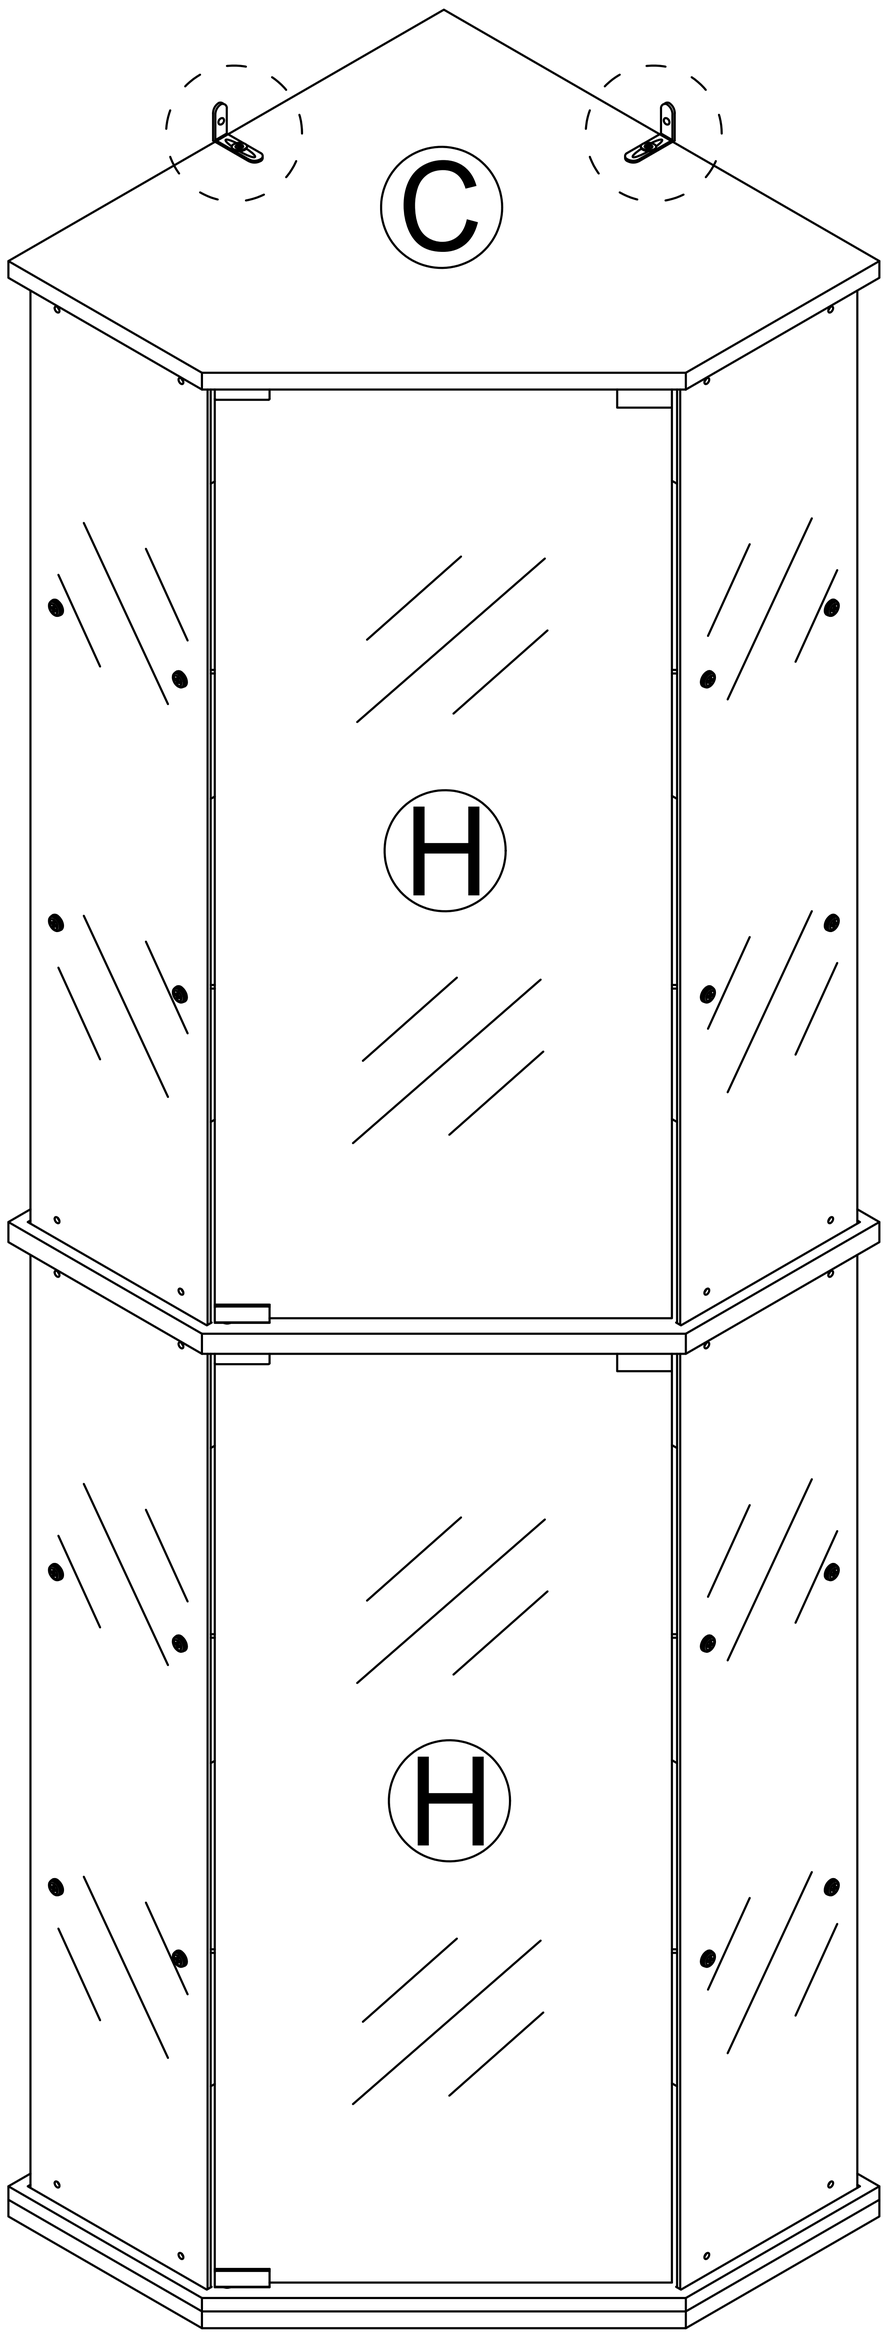


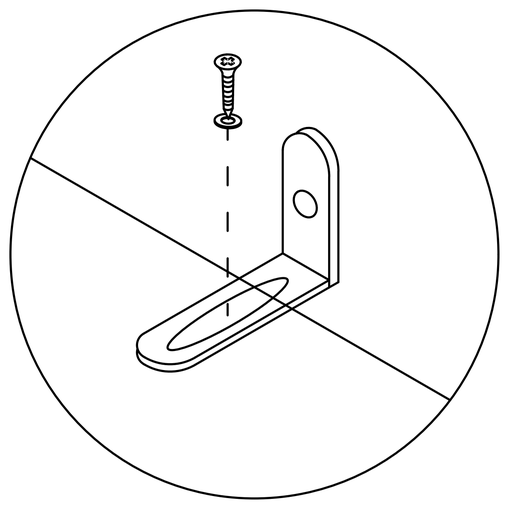

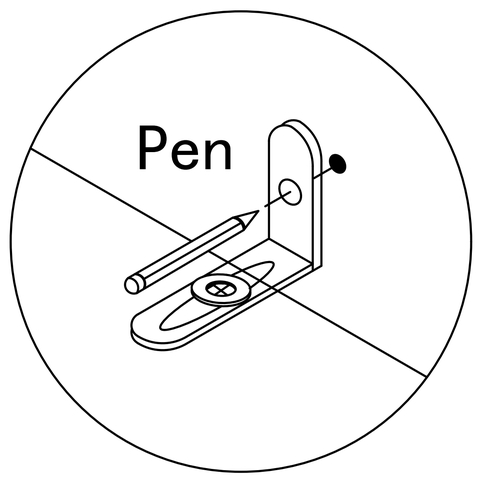

Then mark the wall with a pen through the holes in the anti-fall hardware

Step 27

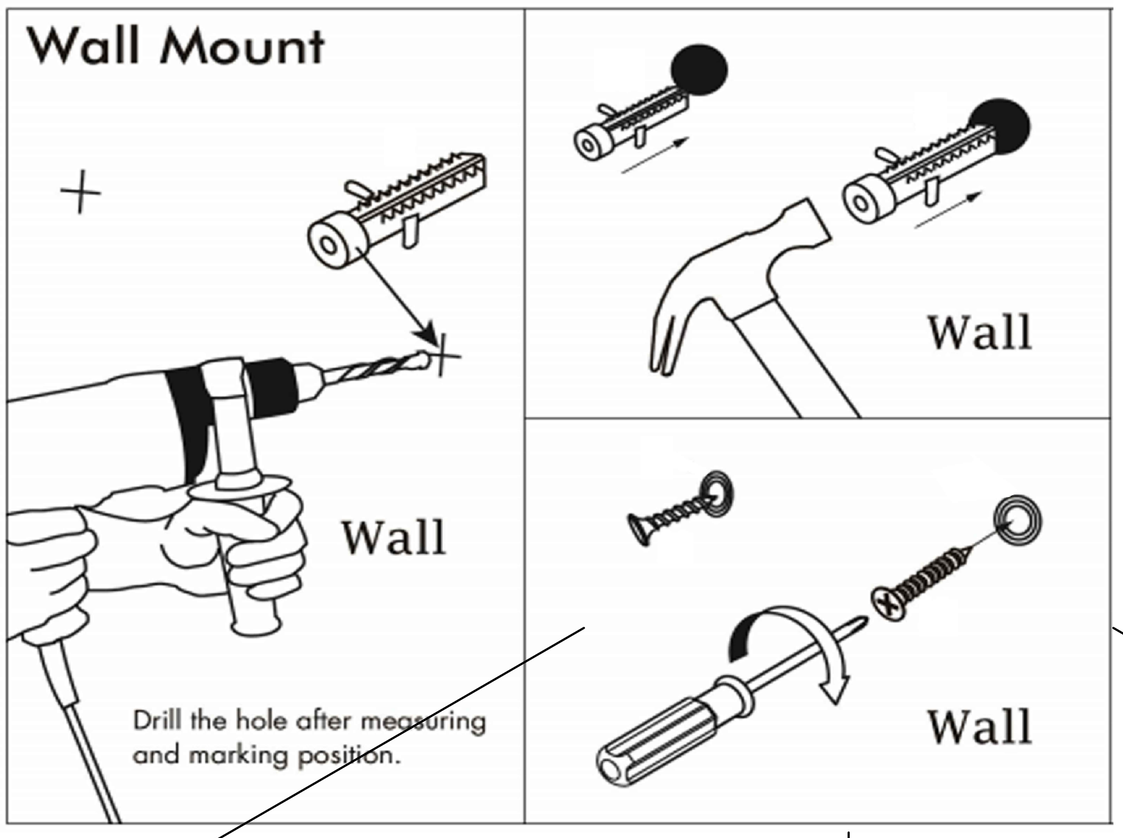


9 x2


x2 x2


Drill the hole with an electric drill and punch in the colloidal particles

Wall !

Wall !

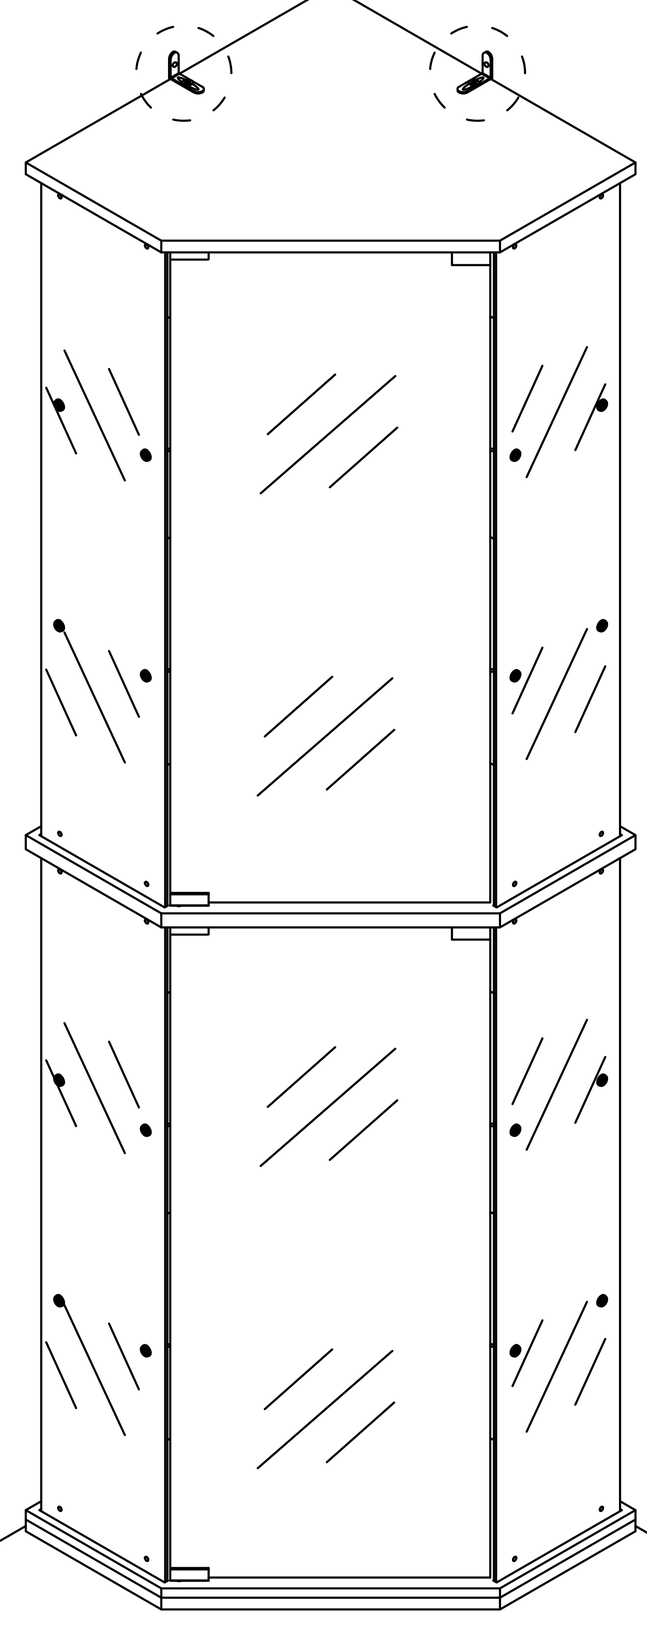

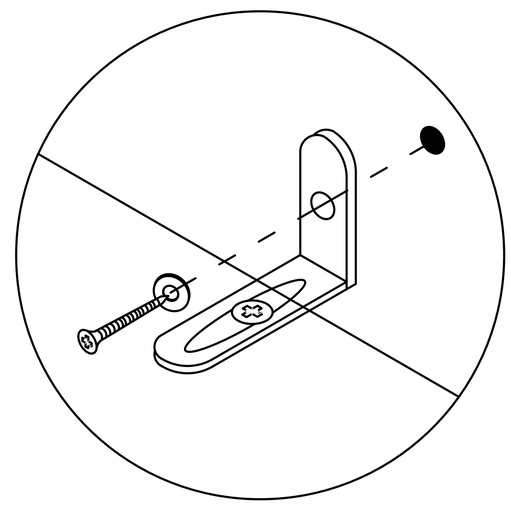

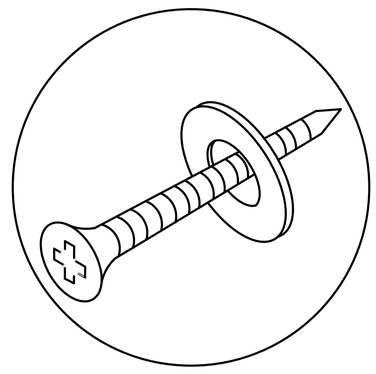


4x45mm

Fix the dressing table to the wall

28

Smart Box Plug Power Off


Scan the QR code to download the app

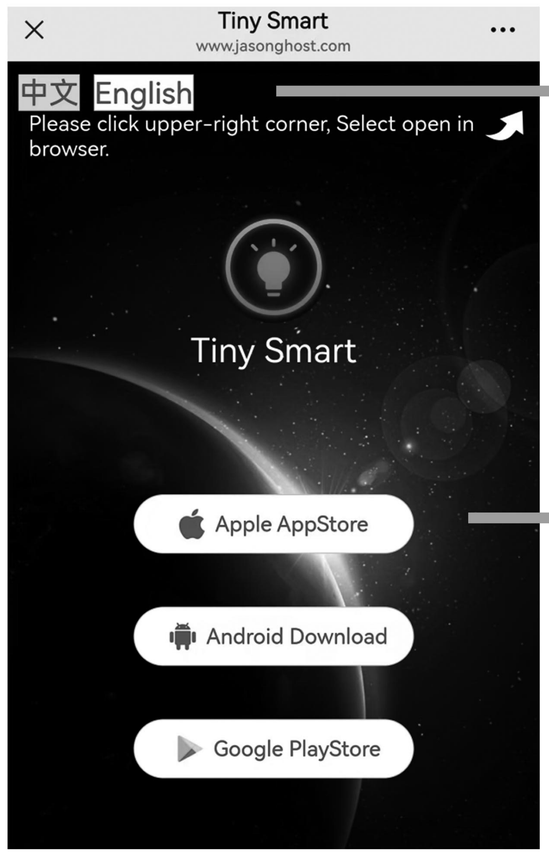


Select English Language

Select the corresponding device to download.

Note: If the download fails,
please turn off the “Enhanced Protection”
in the Pure Mode settings of the device.

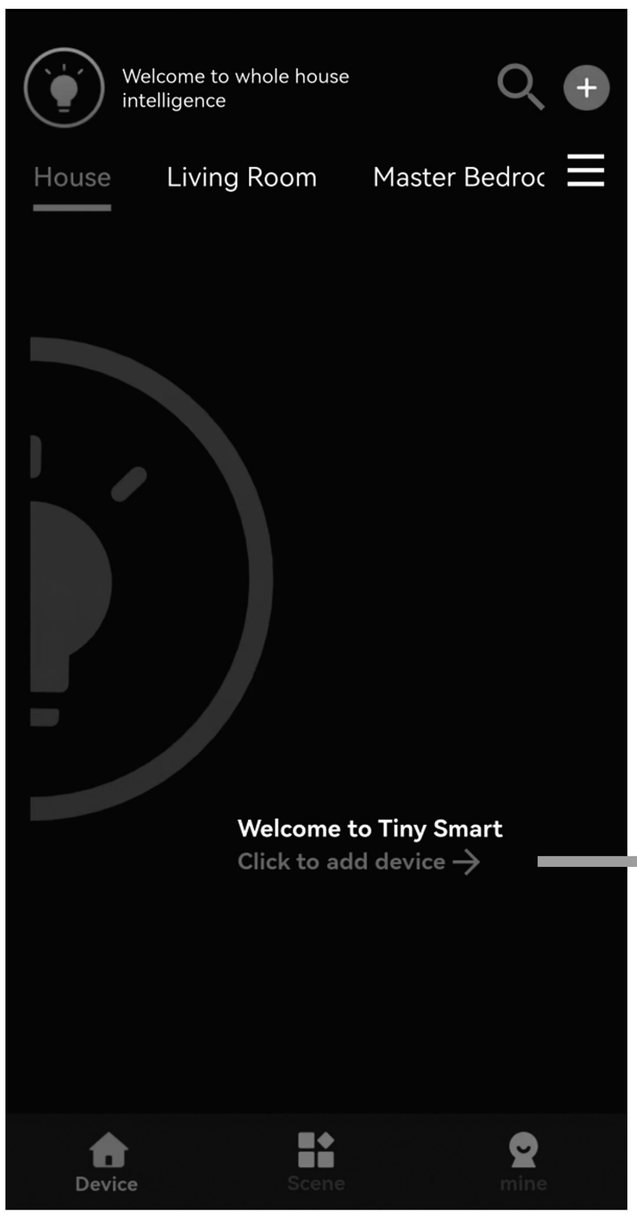


①

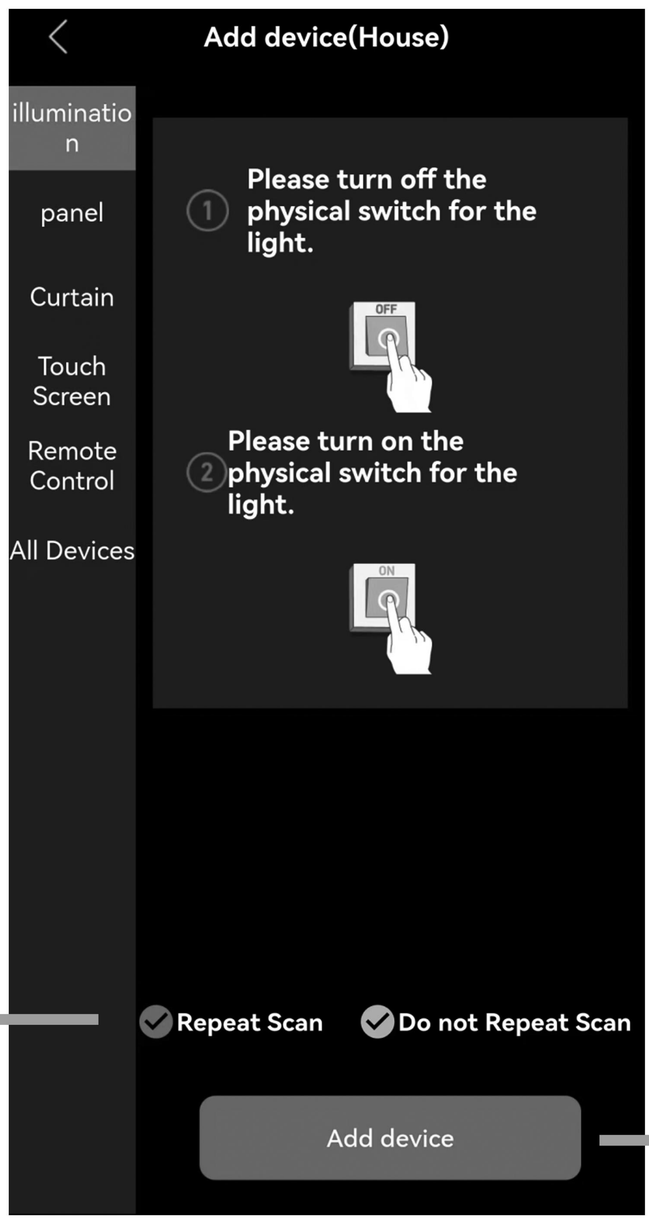

②

It turns blue after clicking


③

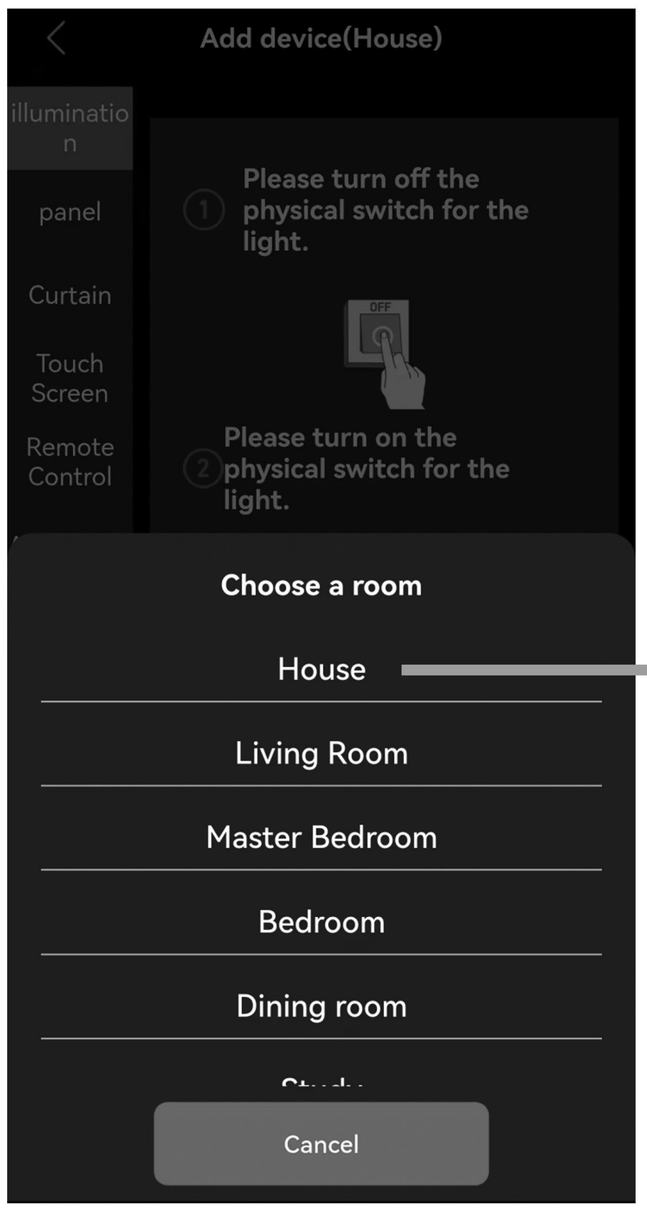

④



⑤ Unplug the smart box

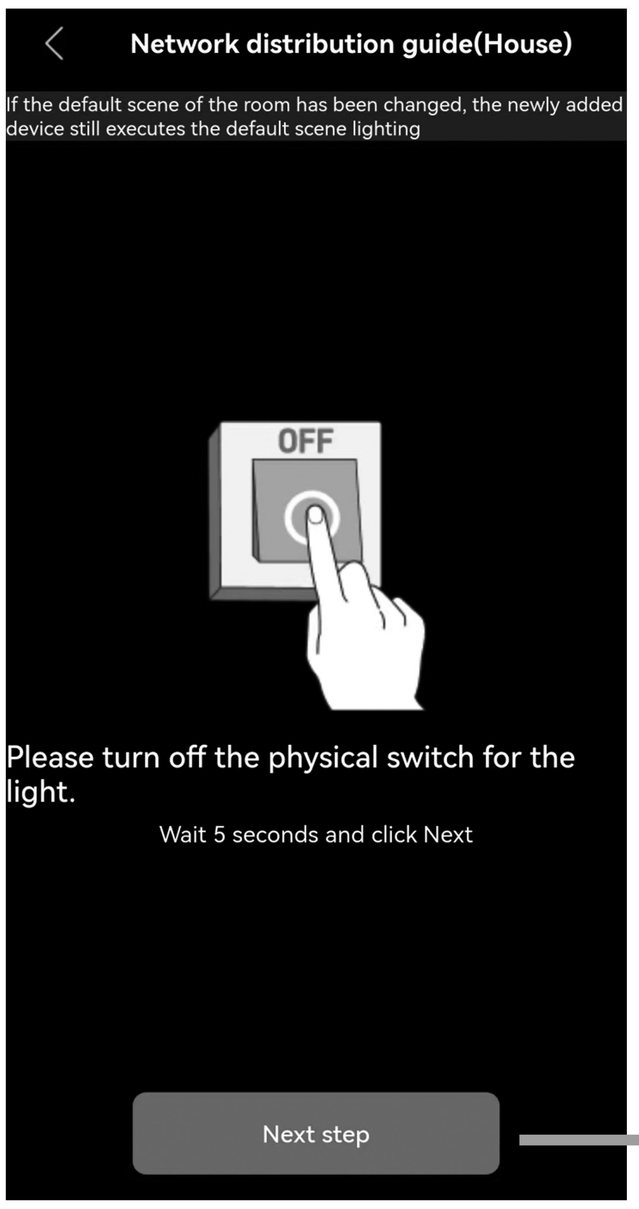


⑥


⑦Plug in the smart box power plug.




The appearance of this program icon indicates that the matching is complete

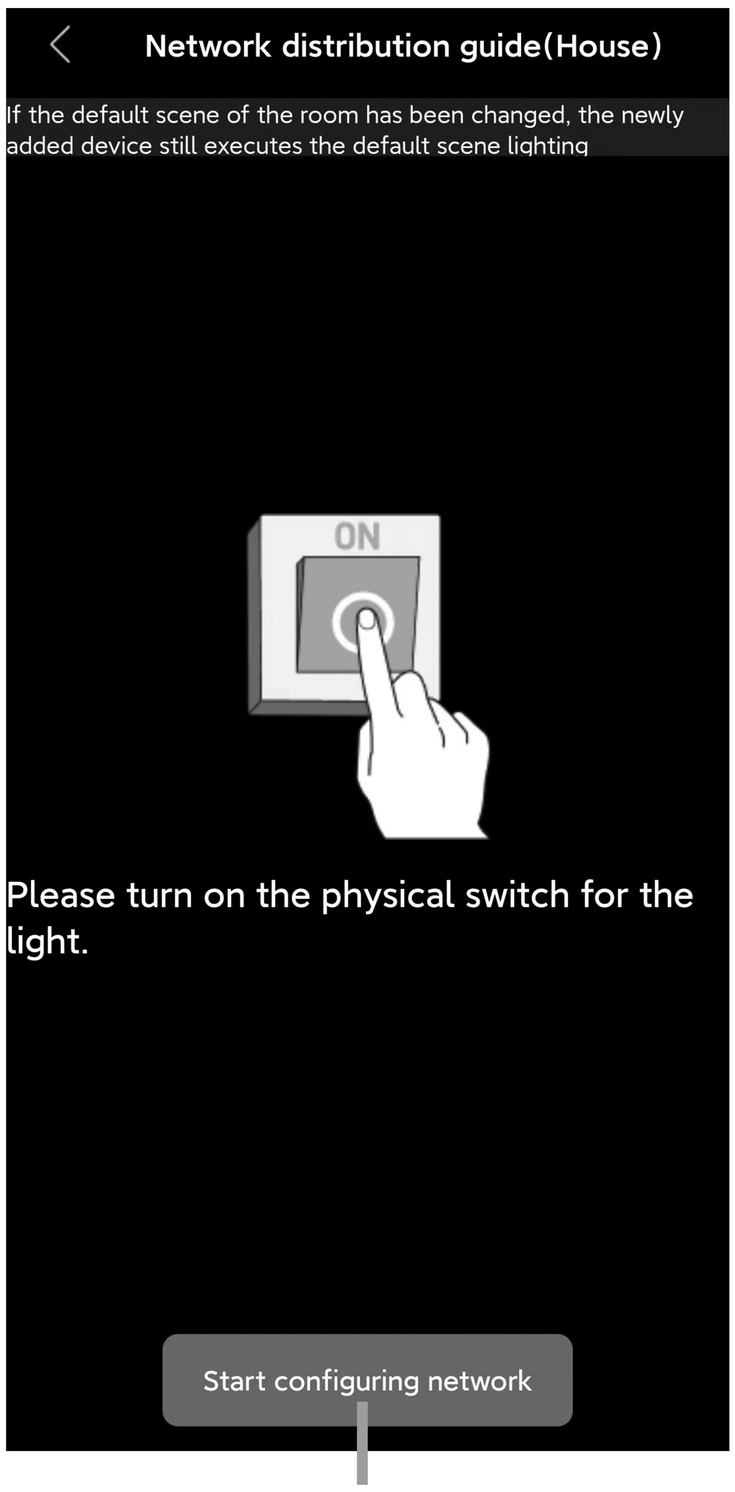


⑧

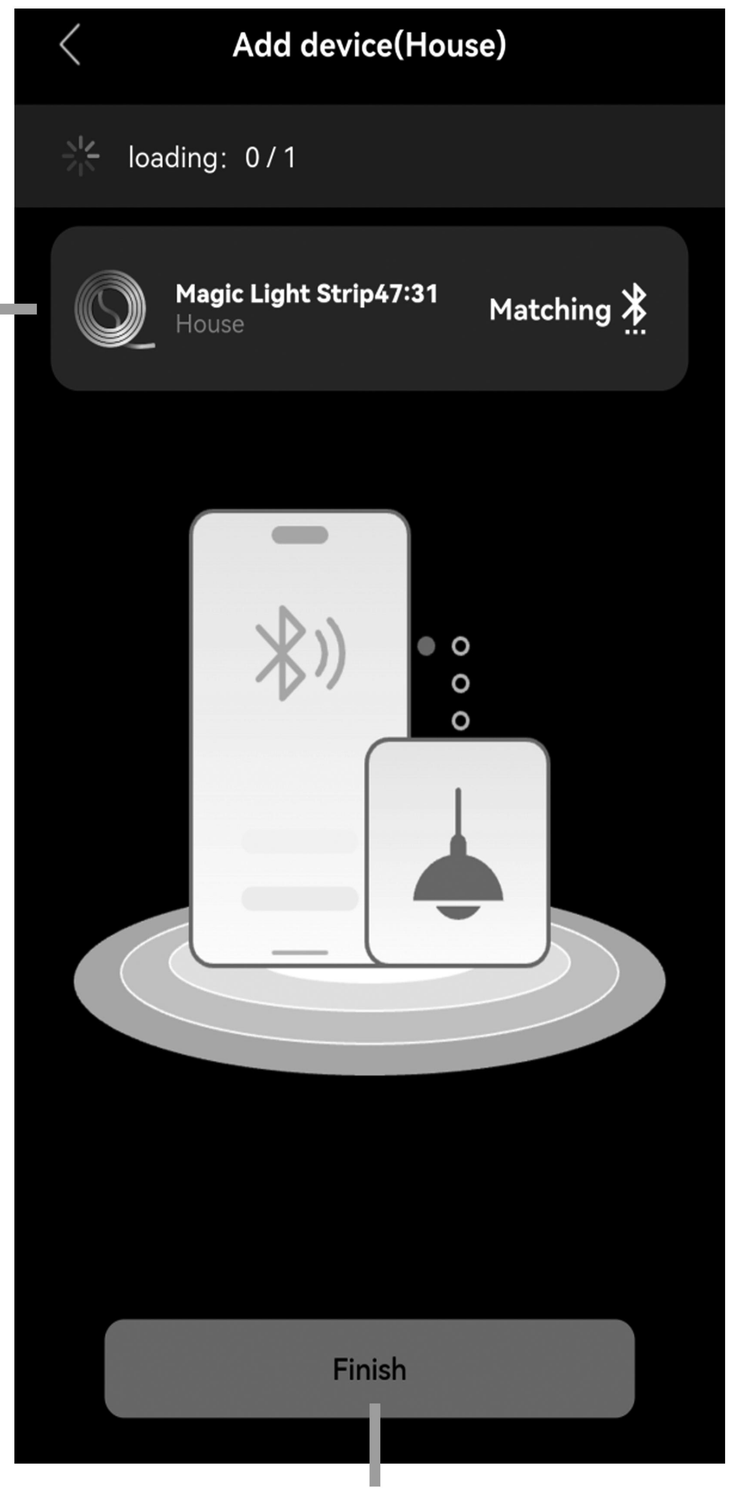

⑨

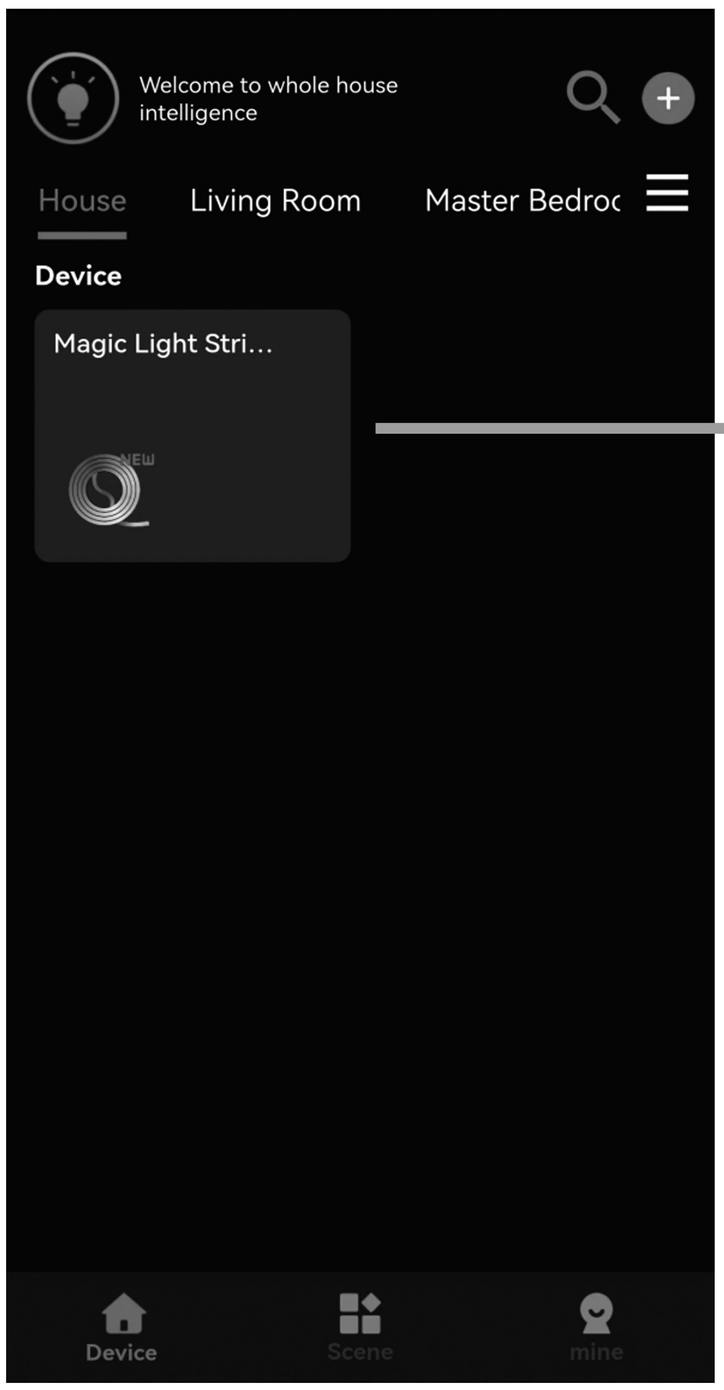

⑩

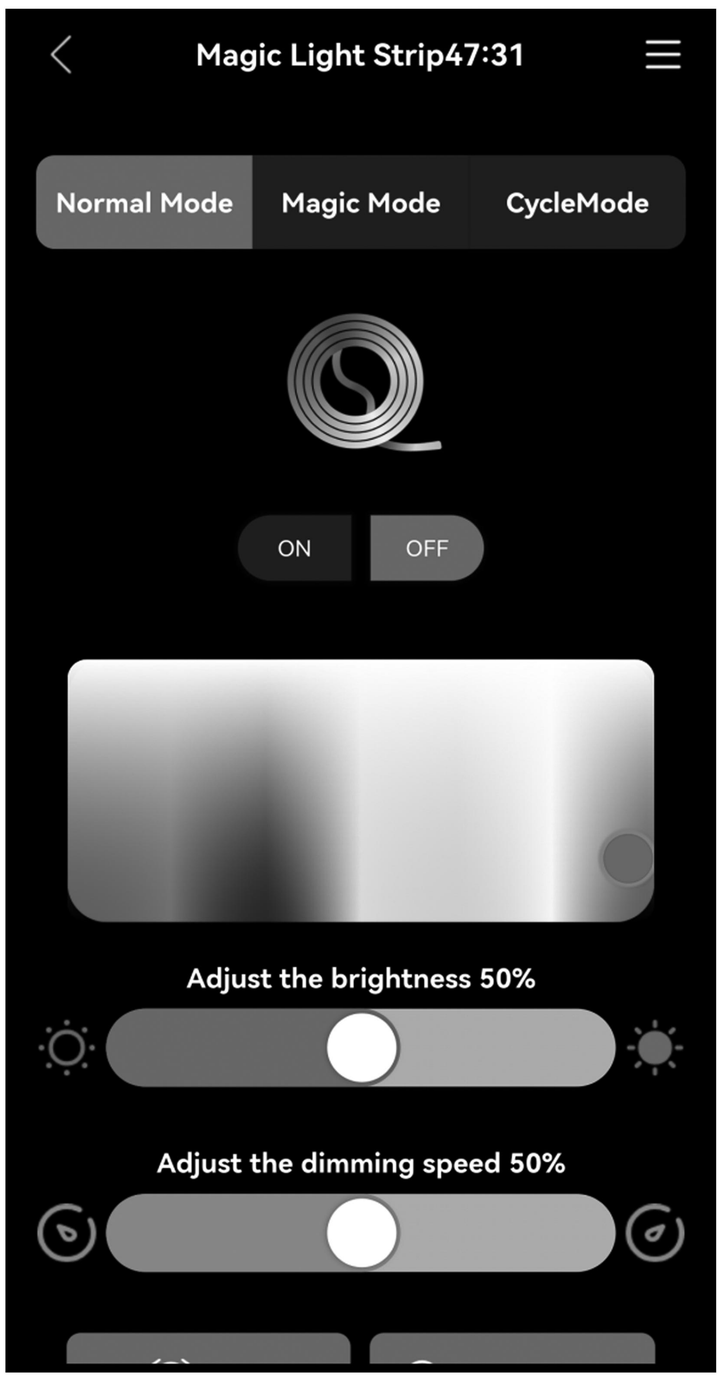

Now you can freely adjust the lighting according to your preferences



Scan code to download app

User's Guide

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons,

it can turn ON/OFF the light and turn ON/OFF the induction function,

change light colors, and adjust the light luminance.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is the master switch of the smart box,

which can turn off all functions of the box and control the light strips on/off operation.

The operation that can be turned on and off with just a light tap.Press and hold to adjust the brightness.

Upon first power-up,the default light will be set to white.



This touch button is used to turn on/off the induction function.

A.touch this button once to turn on the induction function (indicator light on).

After the person leaves or remains stationary for more than 30 seconds, the light strip goes out;

people and objects within a range of 1 meters move will light up the light strip.

B. Long press this button for 0.5 seconds to turn off the human body induction function(the indicator light goes out).

At this point, Keep the light strip as it was before turning off and no longer be affected by humanand object activities.

By default, induction function is enabled when powered on.




This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.

Simply tap to cycle through the options.(Attention:This mode cannot adjust the brightness)



This touch button controls the single-color switching function of the light strips,

offering 7 different colors to choose from.

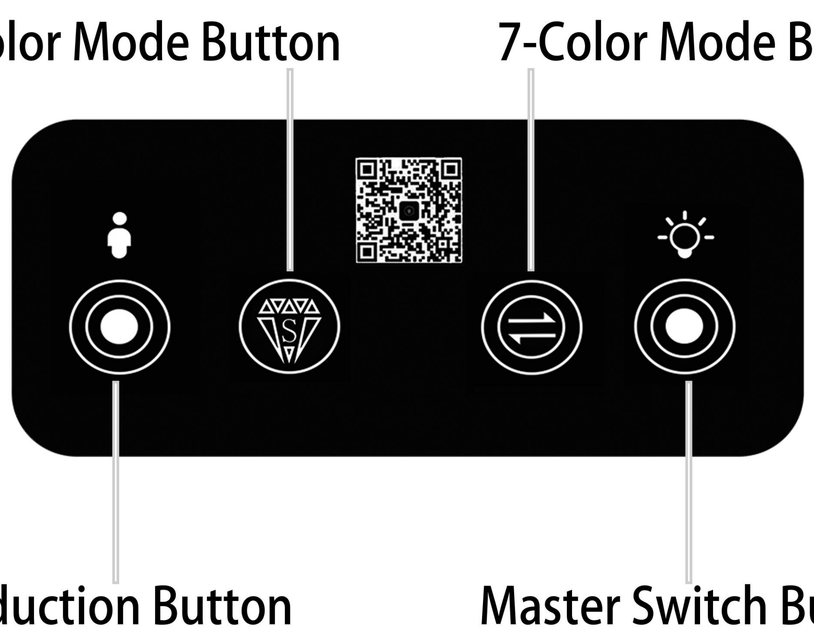

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.