


①

Caution




1) First, make sure to disconnect the power by turning off the switch and the circuit breaker.

②




2) Install the mounting plate. Make sure to securely screw the mounting plate onto the electrical box or a beam if necessary.

③

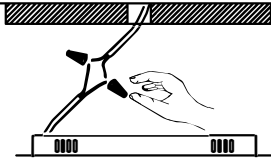

3) Connect the hot wire (black or red) from the electric box with the "L" wire from the chandelier, and the white wire from the electric box with the non-L wire from the light. Screw the ceiling canopy into the mounting plate.

④




4) Adjust the height of each tier of the frame from the top to the bottom.

⑤

5) Connect the power by first turning on the circuit breaker and then the light switch.

Composition material: Steel (201)+Crystal
Weight: 13 lb

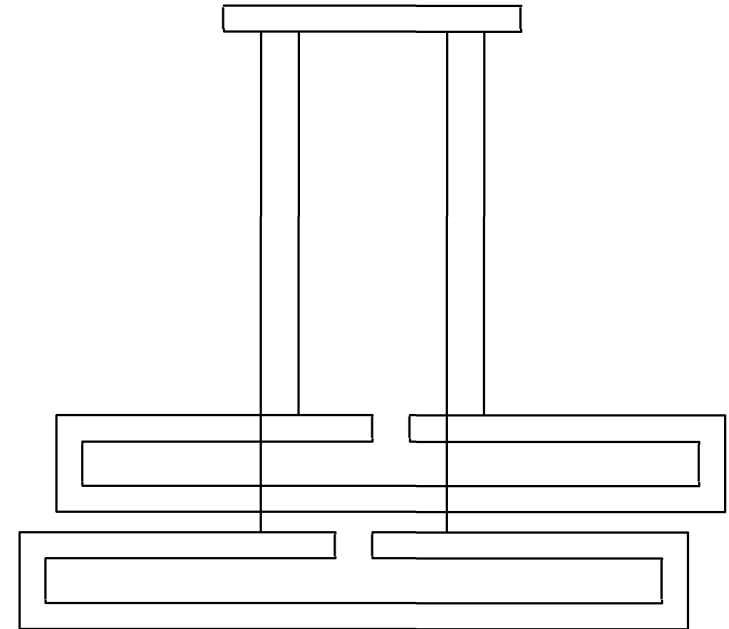

Dear Customer

Thank you for your business!

If you have any question or problem, please text or call us at 870-9498466. We want you to be completely satisfied with your Purchase.

Product review means the world to us, if you want to share your experience you can leave a short product review.

Thank you

Maxax Team