

Project:

Note:

Type:

Quantity:

Model#: SP - DOM - FR - 16 - - - 12W - -

Description

Subtle, arching geometric forms with color and scale. Quality illumination delivered via integrated, highly efficient LEDs. This fixture incorporates universal voltage input and universal dimming.

Features

- Suspends from an 144" adjustable cable
- Optional integrated LED light kit with glass diffuser comes with a 12' black power cord
- Spun aluminum construction with a powder coated paint finish
- Damp location rated




Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Input Voltage: 120 VAC 50/60Hz
- Lumens: 679 Lm (Gold Interior); 800 Lm (White Interior)
- Fixture Wattage: 12W
- Dimming: Universal dimming (TRIAC/ELV/0-10V)
- Cable Length: 144"
- Fixture Weight: 6.5 (2.95 kg)
- For recommended dimmers, see <http://blackjacklighting.com>

Options

- Color Temperature: 2700K, 3000K, 3500K, or 4000K
- Available in: WG-White w/ Gold Interior, BG-Black w/Gold Interior, or SW-Satin Nickel w/White Interior

Dimensions

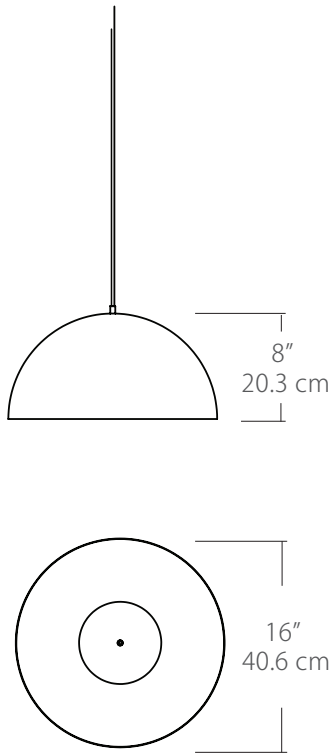

Finishes



WG - White w/
Gold Interior



BG - Black w/
Gold Interior



SW - Satin Nickel w/
White Interior

ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
SP	DOM	FR	16		30K	12W		
SP Small Pendant	DOM Domos	FR Frosted diffuser w/ integrated light kit	16 16" Diameter	WG White w/Gold Interior BG Black w/Gold Interior SW Satin Nickel w/White Interior	27K 2700K 30K 3000K 35K 3500K 40K 4000K	12W 679 Lm Gold Interior 800 Lm White Interior	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	144 144" cable length Change length for custom cable length in inches 144" Standard
Example: SP-DOM-FR-16-WG-30K-12W-SP2-144					(30K Standard)		SP5 Standard	


Finish


Finish  WG BG SW	 WG = White with Gold Interior	 BG = Black with Gold Interior	 SW = Satin Nickel with White Interior
--	---	---	---

Wattage


Wattage 12W 12W	12W = 12 Watts / 840 Lumens (Gold Interior), 14 Watts / 800 Lumens (White Interior) (Lumens measured at 3000K)
------------------------------	--

Mounting

Mounting  SP5 SP2 MPC JTA	<p>SP5 = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box <i>Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</i></p> <p>SP2 = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) <i>Cable with modular connector (and optional wire harness) attaches to a remote driver</i></p> <p>MPC = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) <i>Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</i></p> <p>JTA = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) <i>Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</i></p>
--	---


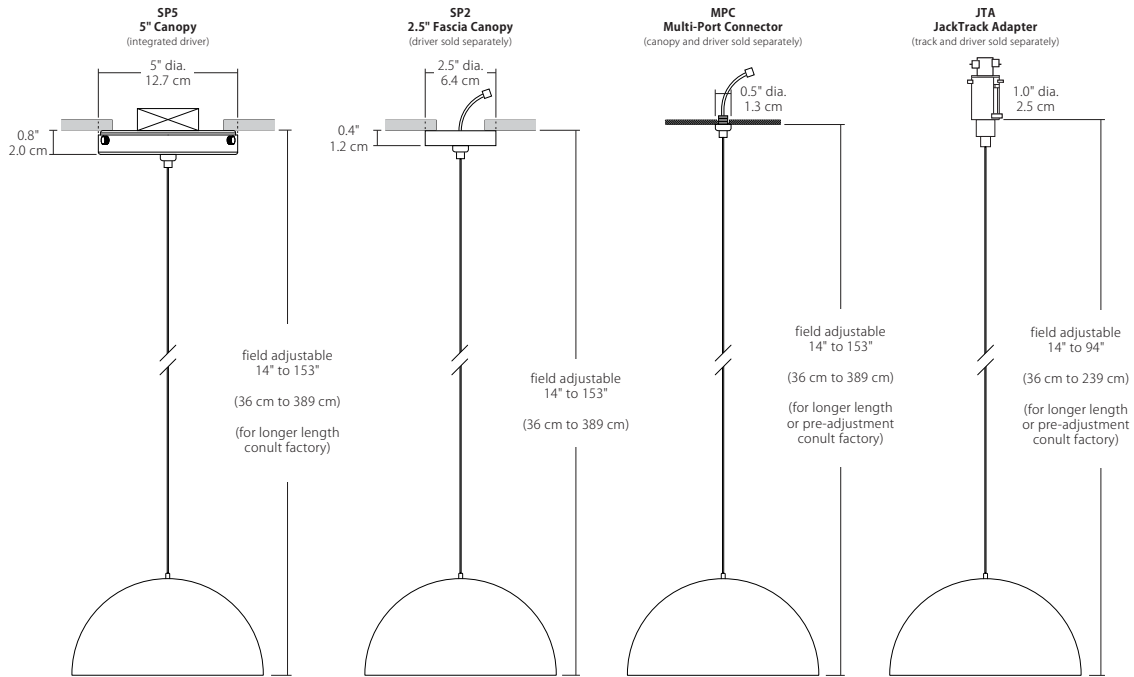


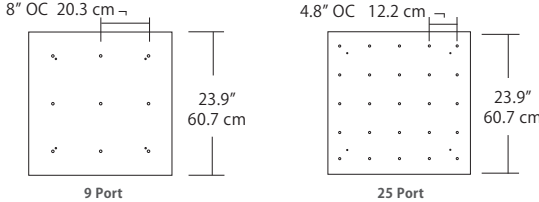

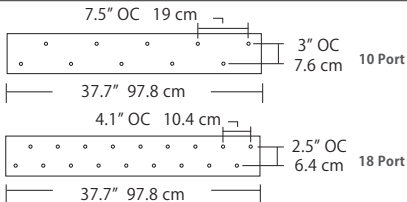

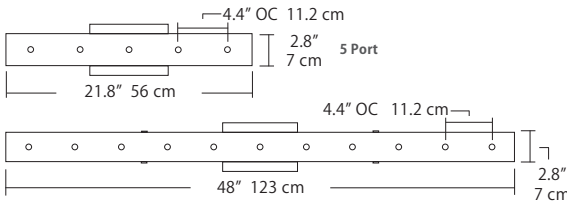

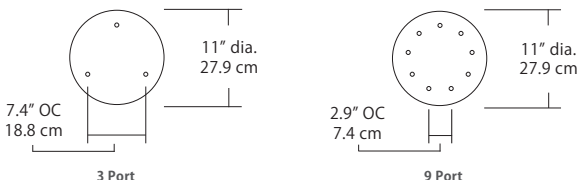

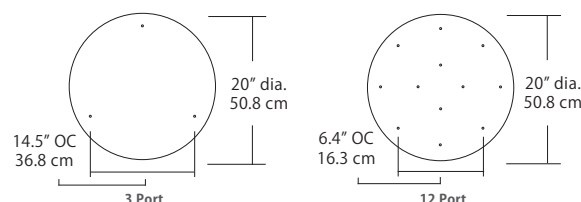

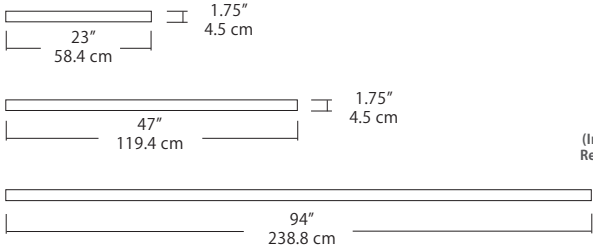



Max Cable Length

Length  144" (Standard) CU - Custom	144" (Standard) (Change Length for custom cable length, in inches) Factory pre-configuration of cable length is available. Consult factory for details.
--	--

For full specifications and ordering information, see blackjacklighting.com

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	5" Canopy Canopy and driver included with pendant	 5" dia. 12.7 cm	 (Integrated Driver) 2.8" / 7.1 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
SP2	2.5" Fascia Canopy Canopy included with pendant. Driver sold separately.	 2.5" dia. 6.4 cm	 (Remote Driver required) 1.4" / 3.5 cm	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	24" Multi-Port Square - 9 Port C-MPS-2409-# 24" Multi-Port Square - 25 Port C-MPS-2425-#	 8" OC 20.3 cm 23.9" 60.7 cm 4.8" OC 12.2 cm 23.9" 60.7 cm 9 Port 25 Port	 21.5" 54.6 cm 2.5" 6.3 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	38" Multi-Port Rectangle - 10 Port C-MPT-3810-# 38" Multi-Port Rectangle - 18 Port C-MPT-3818-#	 7.5" OC 19 cm 37.7" 97.8 cm 3" OC 7.6 cm 10 Port 4.1" OC 10.4 cm 2.5" OC 6.4 cm 18 Port 37.7" 97.8 cm	 4.7" 11.9 cm 2.5" 6.3 cm 6" 15.2 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	22" Multi-Port Linear - 5 Port C-MPL-2205-# 48" Multi-Port Linear - 11 Port C-MPL-4811-#	 4.4" OC 11.2 cm 21.8" 56 cm 2.8" 7 cm 5 Port 4.4" OC 11.2 cm 48" 123 cm 2.8" 7 cm 11 Port	 2.8" 7 cm 1.4" 3.5 cm (Integrated or Remote Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	10" Round - 3 Port C-MPR-1003-# 10" Round - 9 Port C-MPR-1009-#	 11" dia. 27.9 cm 7.4" OC 18.8 cm 3 Port 11" dia. 27.9 cm 2.9" OC 7.4 cm 9 Port	 10" dia. 25.4 cm 2.1" 5.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
MPC	20" Round - 3 Port C-MPR-2003-# 20" Round - 12 Port C-MPR-2012-#	 20" dia. 50.8 cm 14.5" OC 36.8 cm 3 Port 20" dia. 50.8 cm 6.4" OC 16.3 cm 12 Port	 18" dia. 45.7 cm 2.5" 6.3 cm (Integrated Driver)	BL Matte Black PC Pol. Chrome WH White SG Satin Gold BZ Bronze SS Satin Silver
JTA	24" JackTrack See JackTrack Spec Sheet 48" JackTrack See JackTrack Spec Sheet 94" JackTrack See JackTrack Spec Sheet	 23" 58.4 cm 1.75" 4.4 cm 47" 119.4 cm 1.75" 4.4 cm 94" 238.8 cm 1.75" 4.4 cm	 1.38" 3.5 cm 1.75" 4.4 cm (Integrated or Remote Driver)	BL Matte Black WH White

For full specifications and ordering information, see blackjacklighting.com


(# symbol indicates additional specification required)

System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------


Quatro

Square Configurations - See [Quatro Square Configurations](#) section of our website for specification information (#)

4S (4' 2x2' / 9 Port)
MSQ-2409-##-4S-##

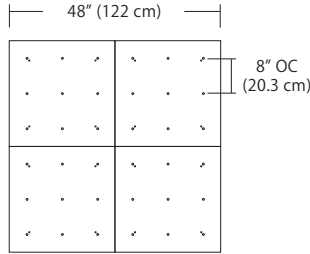

6S (6' 3x3 / 25 Port)
MSQ-2425-##-6S-##

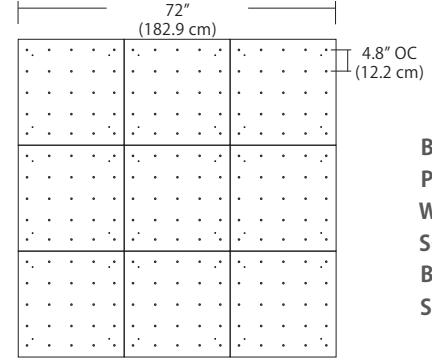


MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

Linear Configurations - See [Quatro Linear Configurations](#) section of our website for specification information (#)

4L (4'x2' / 9 Port)
MSQ-2409-##-4L-##




6L (6'x2' / 25 Port)
MSQ-2425-##-6L-##

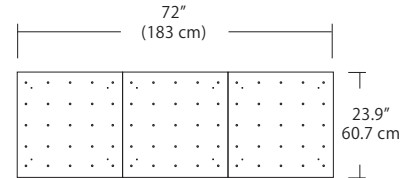

Duo

Linear Configurations - See [Duo Linear Configurations](#) section of our website for specification information (#)


6L (6'4"x6" / 10 Port)
MSD-3810-##-6L-##



MPC


- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

9L (9'6"x6" / 18 Port)
MSD-3818-##-9L-##




Solo

Solo 48" Linear Configuration - See [Solo Linear Configuration](#) section of our website for specific information (#)




Solo (L) Configuration

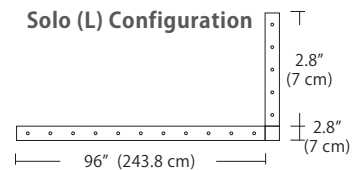

MPC

- BL Matte Black
- PC Pol. Chrome
- WH White
- SG Satin Gold
- BZ Bronze
- SS Satin Silver

Solo 22" Grid Configuration - See [Solo Grid Configuration](#) section of our website for specific information (#)

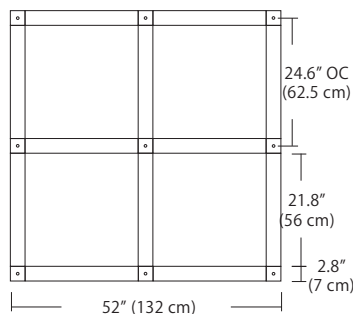

Solo 48" Grid Configuration

