

Size	Length	Width	Slat Spacing	Wood Width	Thickness of Slats
Twin	74.25"	37.75"	4 3/8	2 3/8	3/4
Twin XL	79.25"	37.75"	4 3/8	2 3/8	3/4
Full	74.25"	52.75"	4 3/8	2 3/8	3/4
Full XL	79.25"	52.75"	4 3/8	2 3/8	3/4
Queen	79.25"	59.75"	4 3/8	2 3/8	3/4
King	79.25"	75.1"	4 3/8	2 3/8	3/4
California King	83.25"	71.75"	4 3/8	2 3/8	3/4

Note:-

* Number of slats:- 11 for Twin & Full size , 12 for Twin XL, Full XL, Queen, King & California King.

* 5" Legs are standard & Included.

** Twin & Twin XL have 6Pcs of Legs.

** Full, Queen & King have 9Pcs of Legs.

*** Highly recommended for Full, Full XL, Queen & Cal King should have center support frame for better support.



Kit Includes:-

A. 2- Head Foot Rail

E. 1-Hex Wrench

B. 1-Center Support Rail
(Twin & Twin XL, no center rail)


F. Screw Legs
(Leg quantity will vary on size of bed)

C. Hex Screws


G. Bed Slats

D. 2-Side Rails






STEP #1 Stand up all part as shown




STEP #2 Place center support rail in bracket as shown, skip this step if twin or twin XL

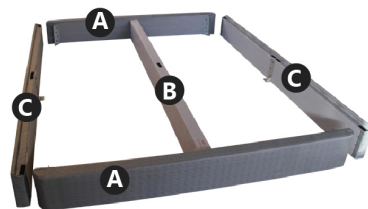


STEP #3 Stand up side rails




STEP #4 Place side rails in tight against brackets

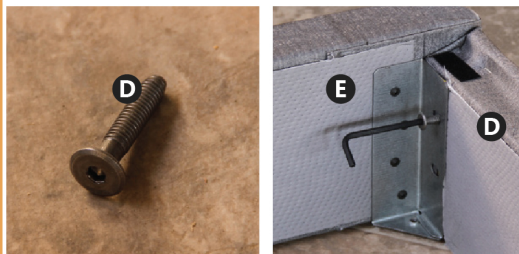

STEP #5 Screw in all hex screws in side brackets as shown

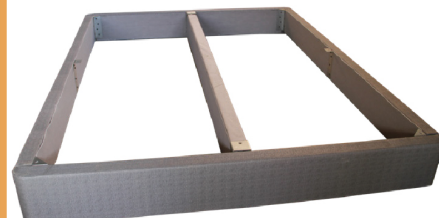


STEP #6 Flip over frame so bottom is on top

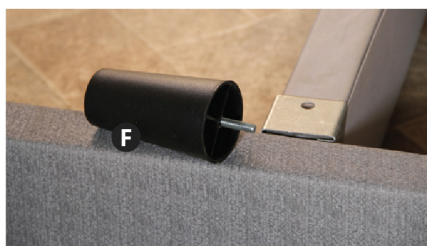

STEP #7 Locate all screw holes for legs




STEP #8 Screw in all supplied legs, Screw in all the way until hand tight

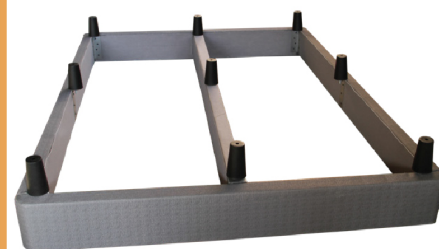

STEP #9 Your frame should have all legs in stalled & look like this



STEP #10 Flip over frame

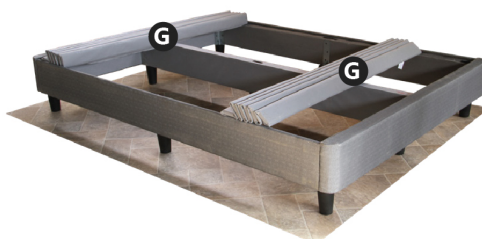

STEP #11 Lay both bed slats on frame



STEP #12 Open bed slats on frame



STEP #13 Make sure velcro is joined together



STEP #14 You are Done! Enjoy!