


Assembly & Installation Instructions

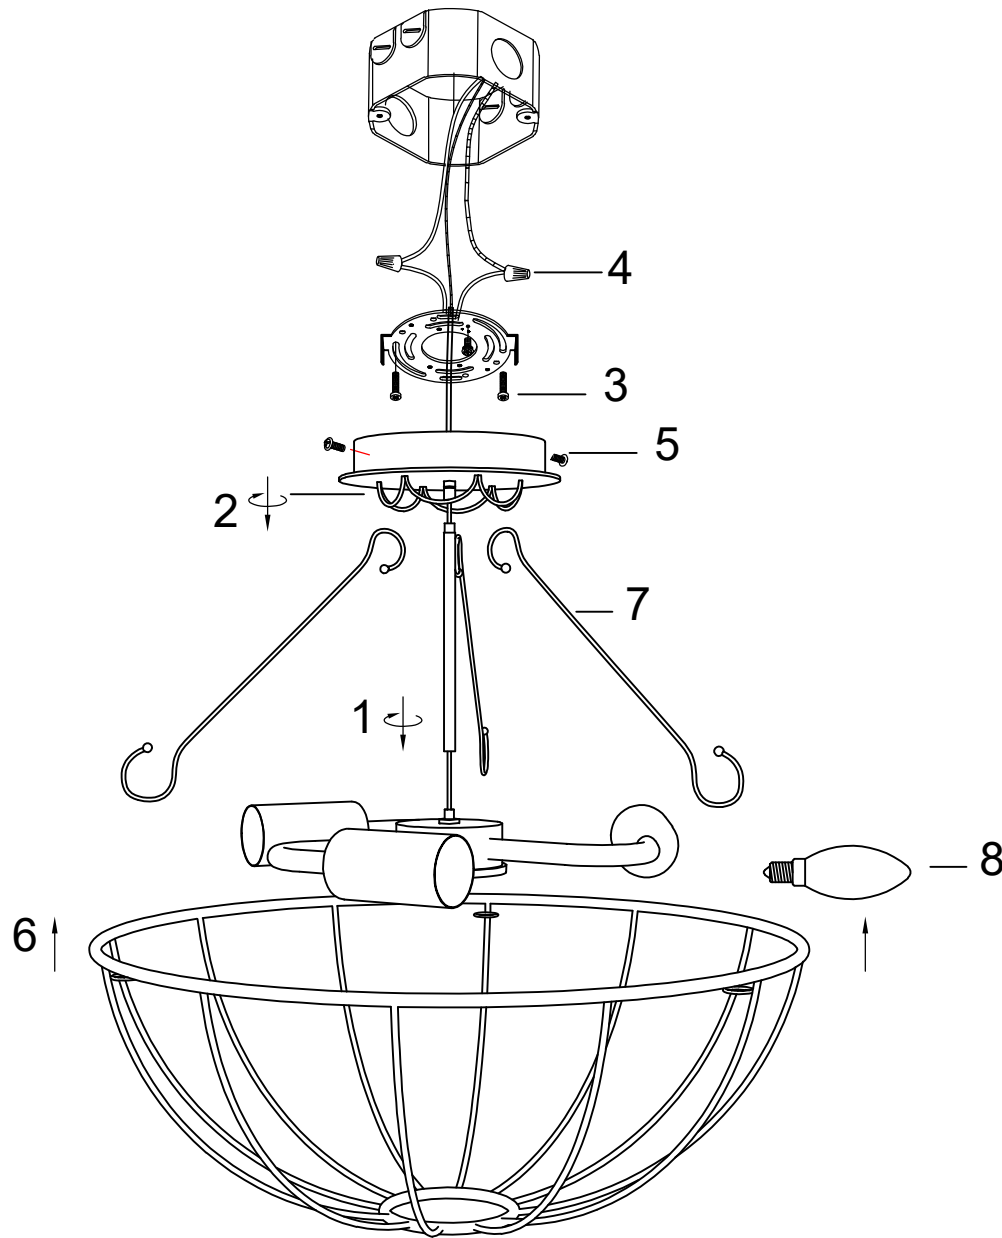

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Thread the main wire through the downrod, then screw the downrod tightly onto the threaded tube of the light fixture.
2. Thread the main wire through the ceiling canopy, then screw the ceiling canopy tightly onto the downrod.
3. Secure the mounting bracket to the U.S.-standard junction box with screws.
4. Connect the wires using wire connectors as follows:
Connect the **BLACK** wire of the main wire to the **LIVE** wire.
Connect the **WHITE** wire to the **NEUTRAL** wire.
Secure the fixture ground wire and external ground wire.
Note: Pay attention that the bare wire can not be exposed to prevent leakage of electricity.
5. Place the ceiling canopy over the mounting bracket, then secure it with screws.
- 6-7. Lift the lampshade upwards, then fasten it and the ceiling canopy with hooks.
8. Install the bulb (**NOT** included) onto the socket as indicated.