

Fixture Type: _____

Catalog Number: _____

Project: _____

Bathroom Sconce

Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
12"	2700K 90	10.5W	863	779	Brushed Aluminum
	3000K 90	10.5W	905	791	Brushed Black
	3500K 90	10.5W	935	840	Brushed Brass

DESCRIPTION

A beautiful bar of pure LED light radiates through the co-extruded acrylic diffuser for brighter illumination, and an adjustable back plate adds versatility to this design's many attributes. It's a clean modern sconce anywhere you mount it.

FEATURES


- Conversion plate for 4" J box included
- Adjustable backplate
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS

Color Temp:	3500K, 3000K, 2700K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	85000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Energy Star 2.0 Damp Location Listed
Construction:	Aluminum hardware with co-extruded acrylic diffuser




FINISHES

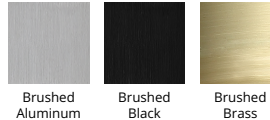

Brushed Aluminum Brushed Black Brushed Brass

LINE DRAWING

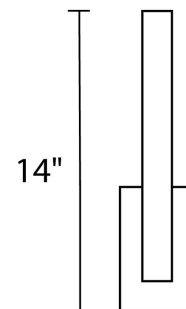

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bathroom Sconce

Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
18"	2700K 90	15.5W	1155	910	Brushed Aluminum
	3000K 90	15.5W	1225	1015	Brushed Black
	3500K 90	15.5W	1330	1115	Brushed Brass

DESCRIPTION

A beautiful bar of pure LED light radiates through the co-extruded acrylic diffuser for brighter illumination, and an adjustable back plate adds versatility to this design's many attributes. It's a clean modern sconce anywhere you mount it.

FEATURES


- Conversion plate for 4" J box included
- Adjustable backplate
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS


Color Temp:	3500K, 3000K, 2700K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	85000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Energy Star 2.0 Damp Location Listed
Construction:	Aluminum hardware with co-extruded acrylic diffuser



FINISHES

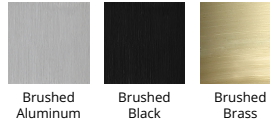

LINE DRAWING

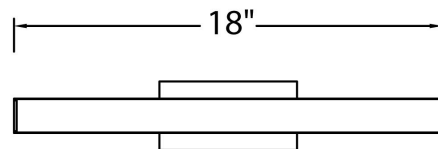

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bathroom Sconce

Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
24"	2700K 90	20.5W	1595	1330	Brushed Aluminum
	3000K 90	20.5W	1720	1440	Brushed Black
	3500K 90	20.5W	1785	1510	Brushed Brass

DESCRIPTION

A beautiful bar of pure LED light radiates through the co-extruded acrylic diffuser for brighter illumination, and an adjustable back plate adds versatility to this design's many attributes. It's a clean modern sconce anywhere you mount it.

FEATURES


- Conversion plate for 4" J box included
- Adjustable backplate
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS


Color Temp:	3500K, 3000K, 2700K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	85000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Energy Star 2.0 Damp Location Listed
Construction:	Aluminum hardware with co-extruded acrylic diffuser



FINISHES

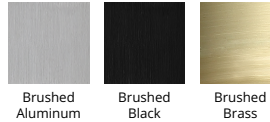

LINE DRAWING

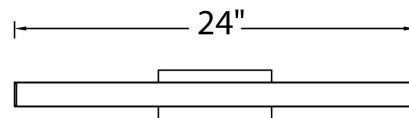

Fixture Type: _____

Catalog Number: _____

Project: _____

Bathroom Sconce

Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
36"	2700K 90	30W	2365	1985	Brushed Aluminum
	3000K 90	30W	2445	2095	Brushed Black
	3500K 90	30W	2561	2180	Brushed Brass

DESCRIPTION

A beautiful bar of pure LED light radiates through the co-extruded acrylic diffuser for brighter illumination, and an adjustable back plate adds versatility to this design's many attributes. It's a clean modern sconce anywhere you mount it.

FEATURES


- Conversion plate for 4" J box included
- Adjustable backplate
- Driver installed within the Junction Box, driver dimension: 2.76" x 1.26" x 1.18"
- 5 year warranty

SPECIFICATIONS

Color Temp:	3500K, 3000K, 2700K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	85000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Energy Star 2.0 Damp Location Listed
Construction:	Aluminum hardware with co-extruded acrylic diffuser



FINISHES



Brushed Aluminum Brushed Black Brushed Brass

LINE DRAWING

