



# One-piece elongated toilet with skirted trapway, dual-flush Veil® K-1381

## Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Dual flush offers a choice of 0.8 or 1.28 gpf (3.0 or 4.8 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) glazed trapway
- Skirted trapway simplifies cleaning
- Quiet-Close™ elongated lid and seat prevents slamming

## Installation

- Standard 12" (305 mm) rough-in
- Requires mounting plate for heated seat installation (sold separately)

## Recommended Products/Accessories

1023457 Wax Ring/Hardware Kit  
1265114 Connector Hose  
K-23726 Drain treatment  
1362736 Mounting Plate Kit Exposed Wire  
K-30780 Carbyne® Quiet-Close™ elongated toilet seat

## Included Components

1422715 Veil® Toilet Seat



## Codes/Standards

ASME A112.19.2/CSA B45.1  
ASME A112.19.14  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
IAPMO Certification


## KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description  |
|-------------------------------------------------------------------------------------|------|--------------|
|  | 0    | White        |
|  | 7    | Black Black™ |

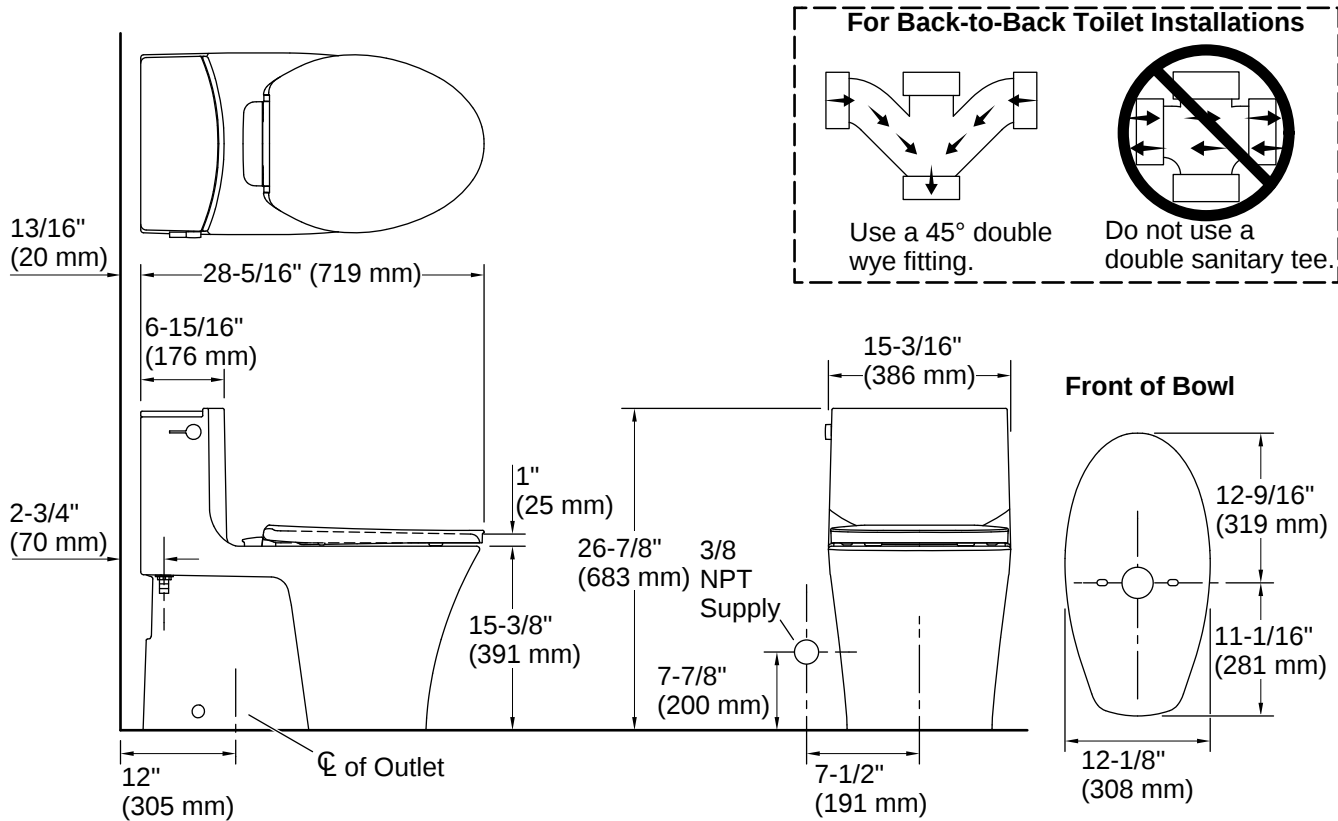

## Technical Information

All product dimensions are nominal.

|                       |                                              |
|-----------------------|----------------------------------------------|
| Toilet type:          | Floor-mount                                  |
| Waste Outlet:         | Floor                                        |
| Bowl shape:           | Compact elongated                            |
| Flush type:           | Class Five                                   |
| Trap passageway:      | 2-1/8" (54 mm)                               |
| Water surface size:   | 9" x 7-1/4" (229 mm x 184 mm)                |
| Rim to water surface: | 5-3/8" (137 mm)                              |
| Rough-in:             | 12" (305 mm)                                 |
| Template:             | Footprint, 1262234-7, not required, included |

## Fixture Supply Requirements

|                       |                    |
|-----------------------|--------------------|
| Min static pressure:  | 20 psi (137.9 kPa) |
| Max static pressure:  | 80 psi (551.6 kPa) |
| Min flowing pressure: | 15 psi (103.4 kPa) |
| Min flow rate:        | 1 gpm (3.8 lpm)    |

## Notes

Install this product according to the installation instructions.