


# ASSEMBLY INSTRUCTIONS

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

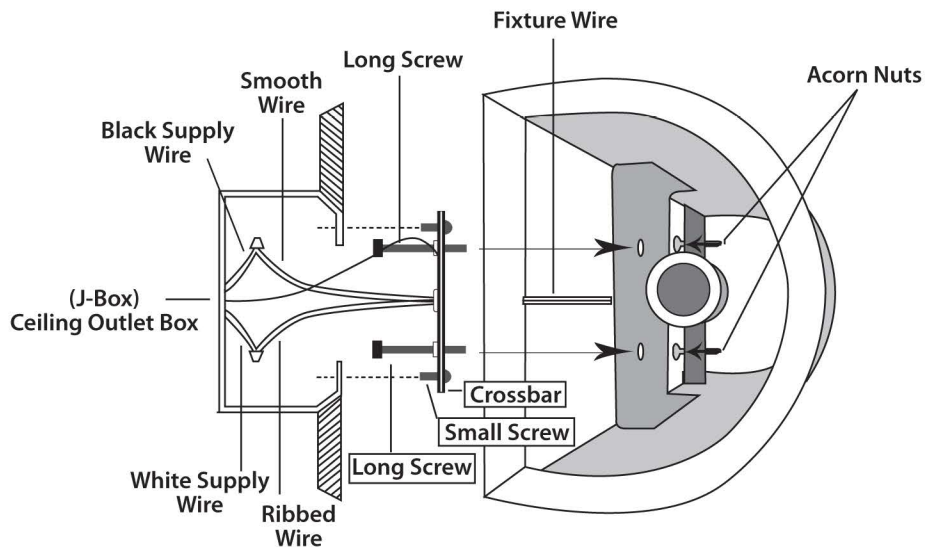

1. Place fixture screws into back side of cross-bar and screw in finger tight.
2. Screw cross-bar into J-Box and tighten
3. Wire fixture wires to supply wires (wire as per local elect. code).
4. Place fixture onto fixture screws, screw crown nuts onto fixture screws and tighten.