

6'×4' Tool Storage Shed ASSEMBLY MANUAL



MODEL#: LGCF1601

Missing part? Damaged? Contact us via email at service@domioutdoorliving.com

www.domioutdoorliving.com

© Copyright 2022–2024 domi LLC. I All Rights Reserved.

Pre-assembly



1.Two or more people are required for assembly.



2. You will need one or more stepladders.



3. Wearing protective gloves is recommended.



4. You may need a safety hat.



5. Please use a Phillips screw driver.



6.For ease of construction, you may need a drill.



7. You may need a safety goggle.



8.Do not fully tighten screws prior to complete assembly.


Warning & Attention

- -Try to assemble this product on the flat ground, otherwise it is difficult to carry out;
- -It would be much easier to assemble the product with three or more people;
- -After assembly, please check whether all screws are tightened, to prevent parts from falling apart.


▲ Use bolts to secure the frame to the ground to against the strong wind.



The manual will assist you during the whole process of assembling. Make sure you have all the parts & hardware as list 1 and list 2 shown; Prepare the level ground for installation.

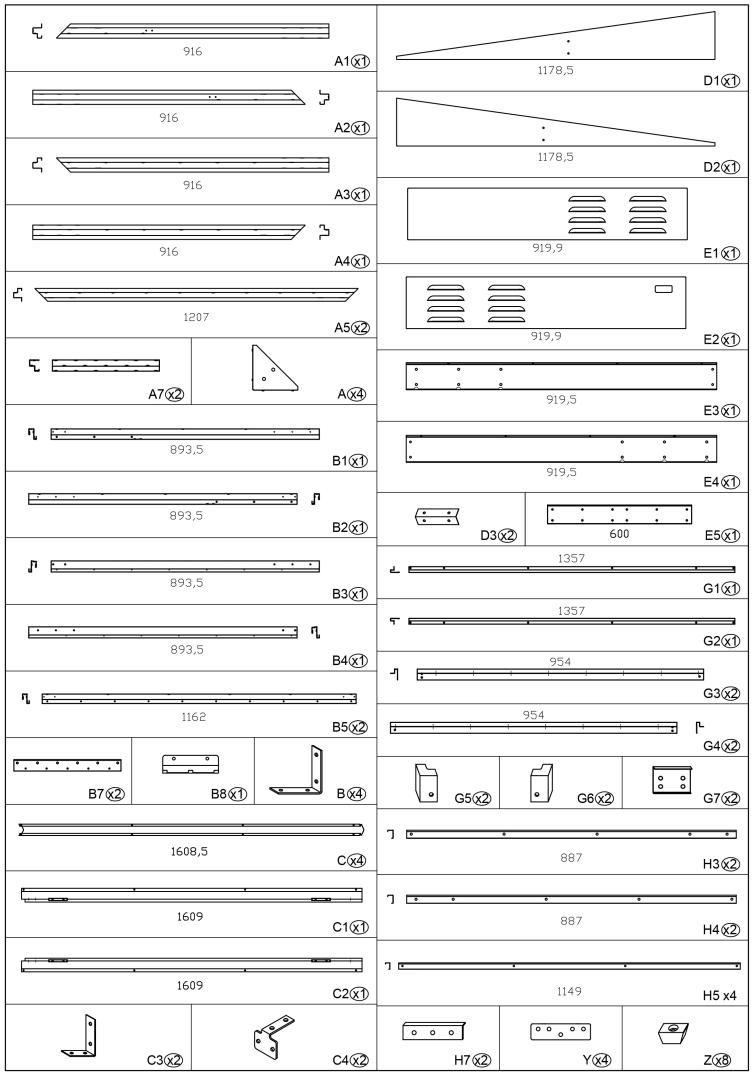


1601-list 1

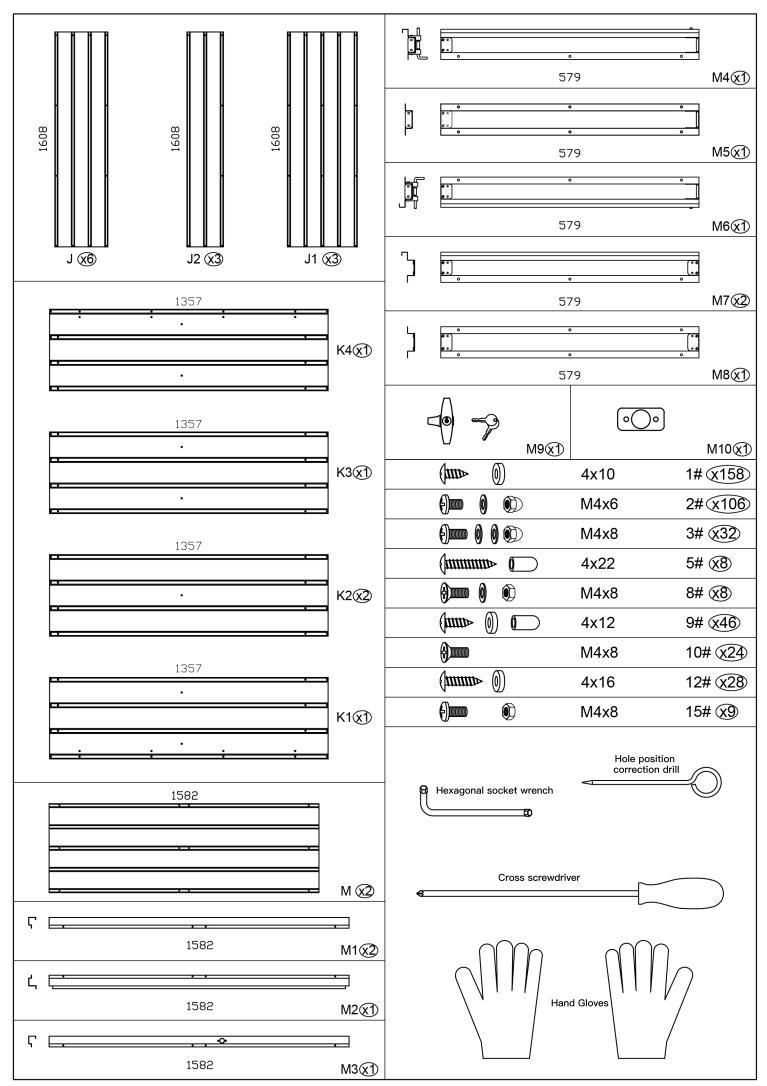


1601-list 2




Hole position correction drill

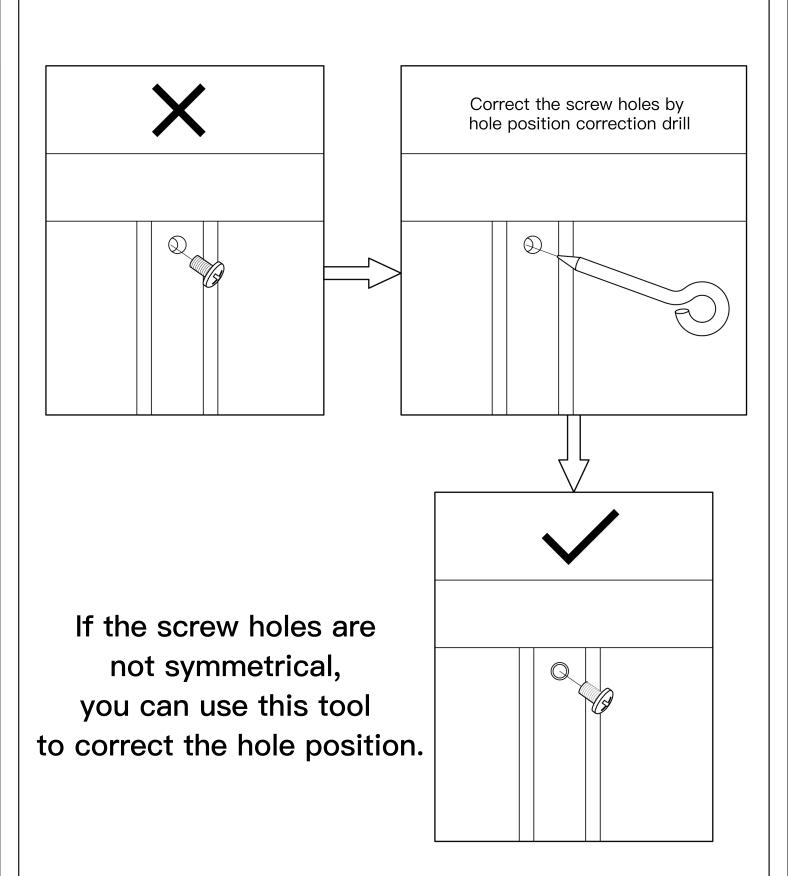



Appendix

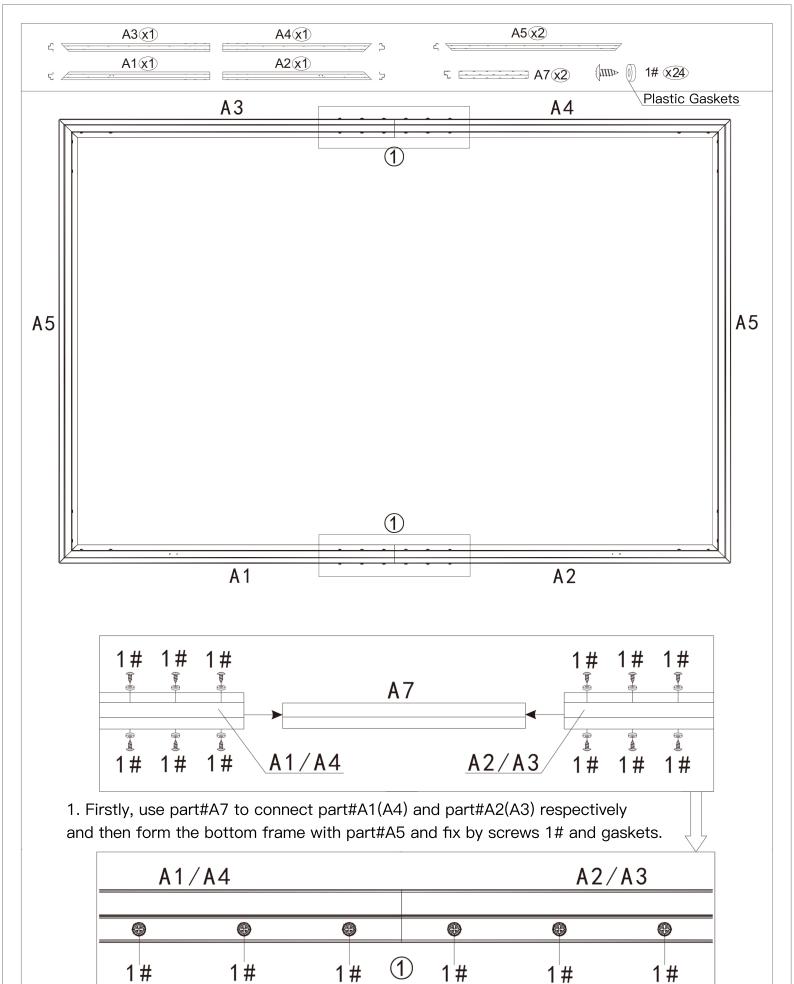

▲ Attention: four corners MUST been right angles and check if the two diagonal distance of square is equal by tape measure

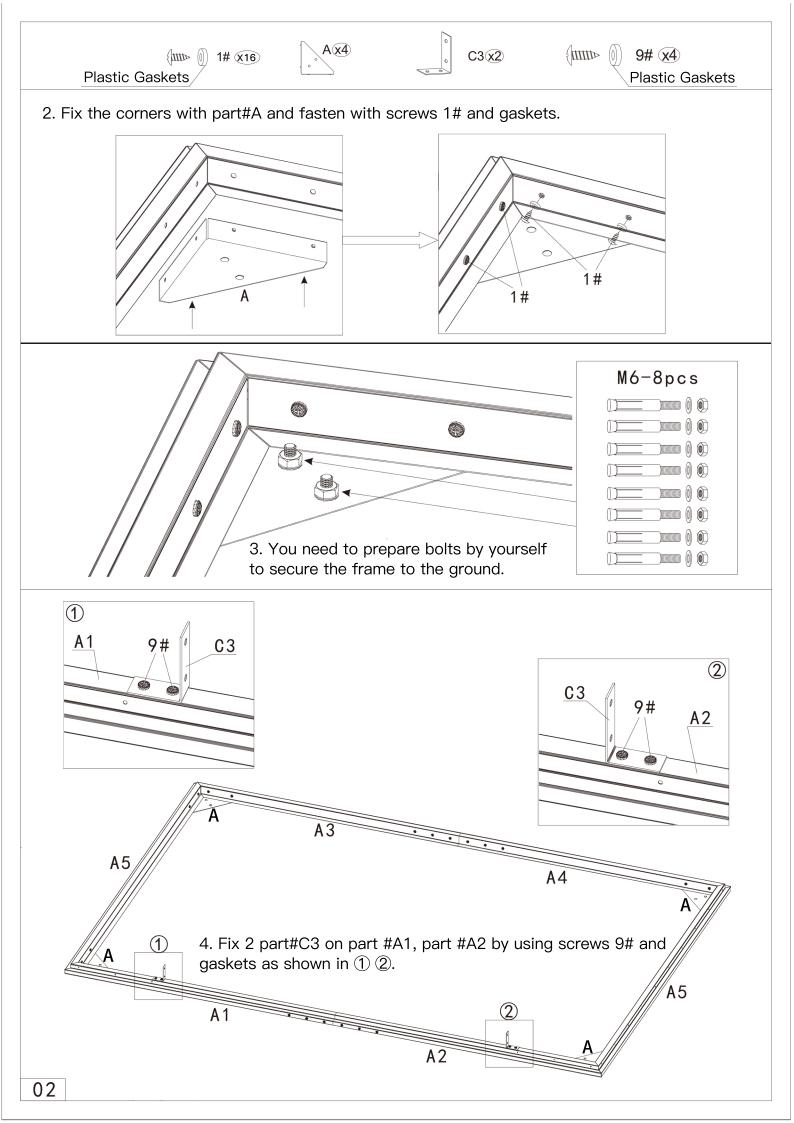

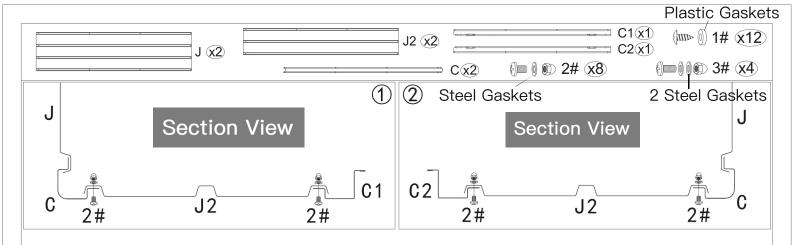


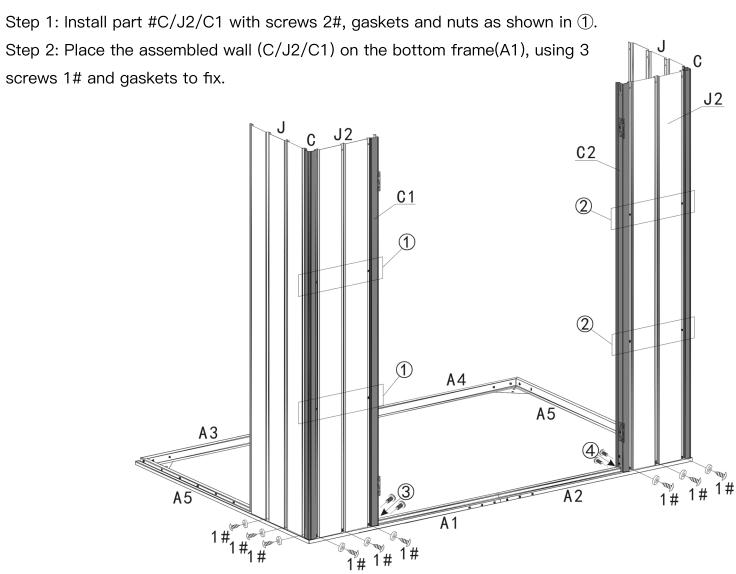



Step 3: Place part#J on the bottom frame(A5), using 3 screws 1# and gaskets to fix.


Repeat the above procedures to assemble the another side.

Step 4: Fix the part #C3 to the part #C1(C2) with 2 screws 3#, gaskets and nuts each as shown in 34.







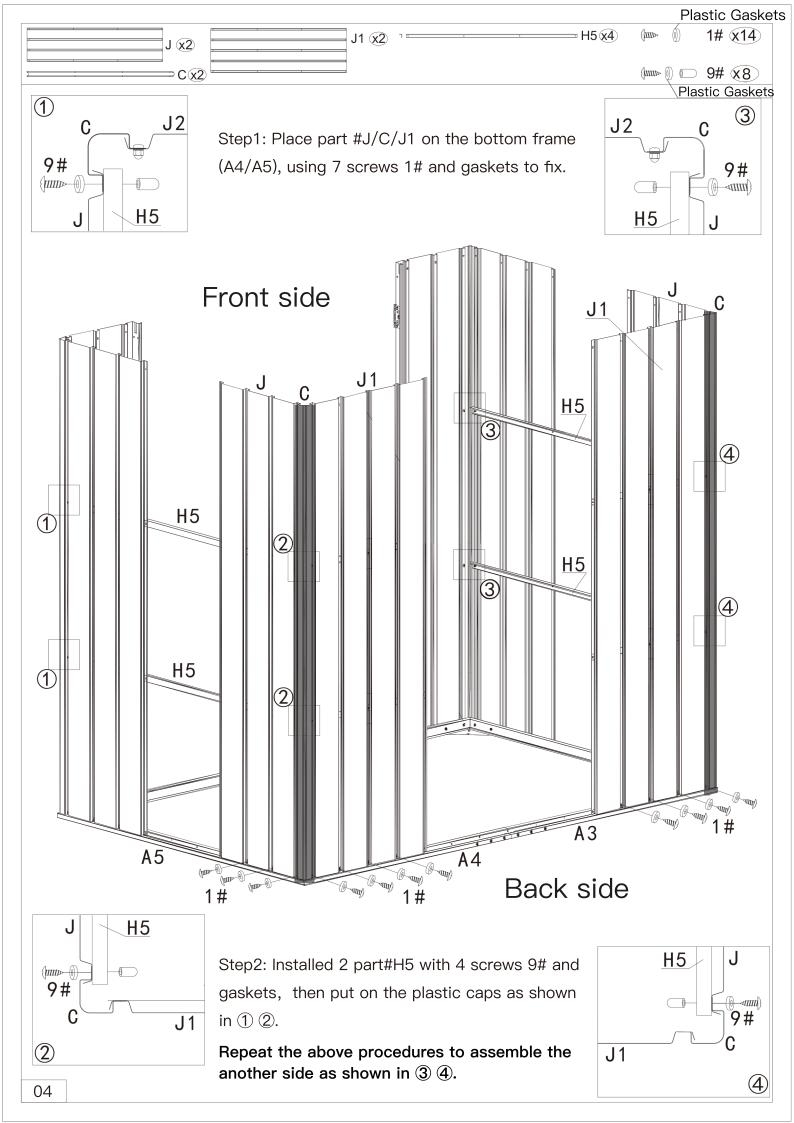

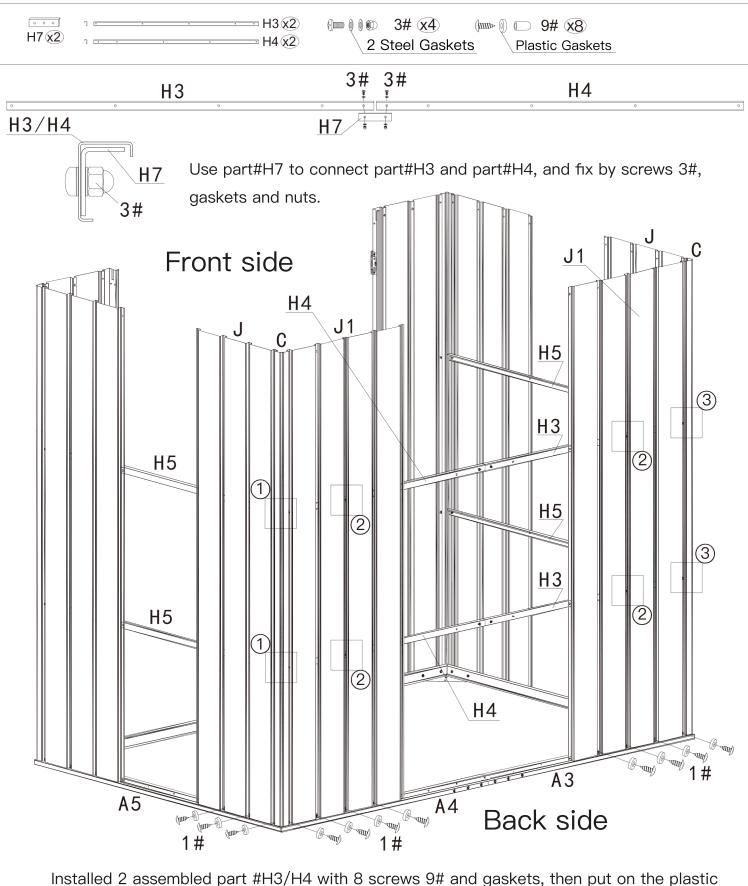


Installed 2 assembled part #H3/H4 with 8 screws 9# and gaskets, then put on the plastic caps as shown in 1 2 3.

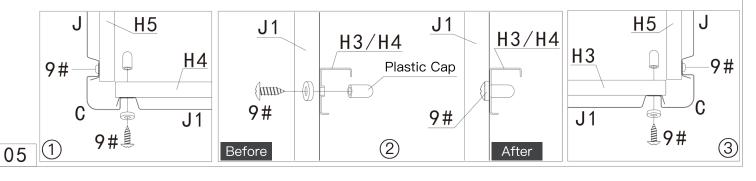


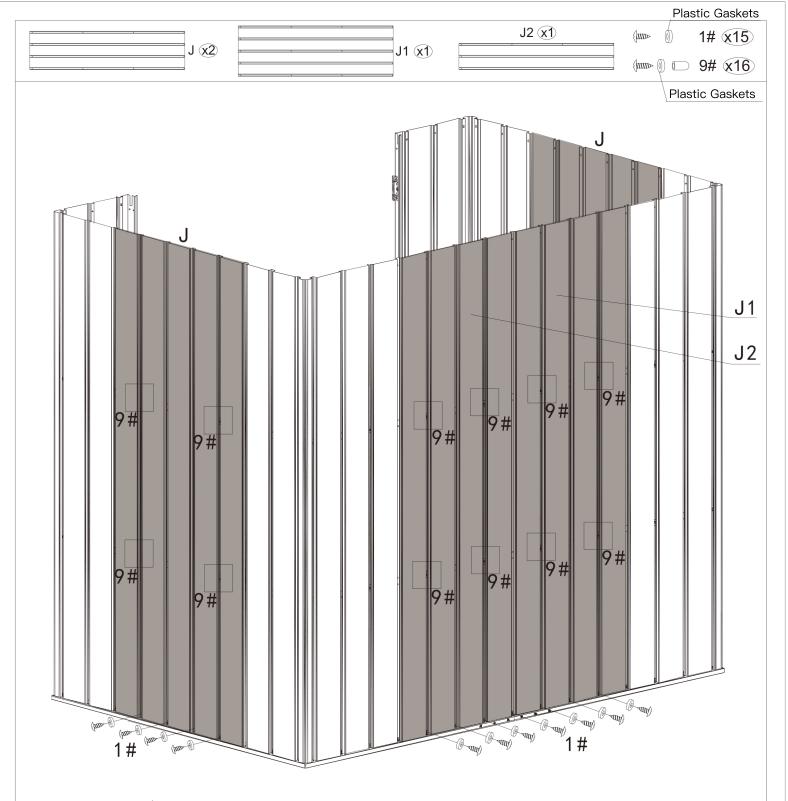


Install part#J1/J2: Use screws 1# and gaskets to fix them on the bottom frame. Fix part #H3/H4/H5 to part#J1/J2 with screws 9# and gaskets, then put on the plastic caps. Repeat the above procedures to assemble 2 part #J on side wall.

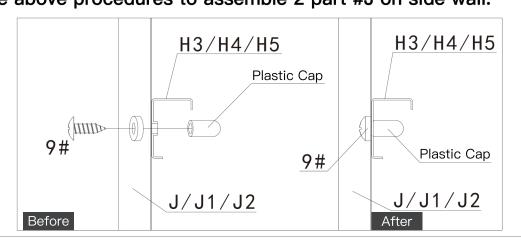

06

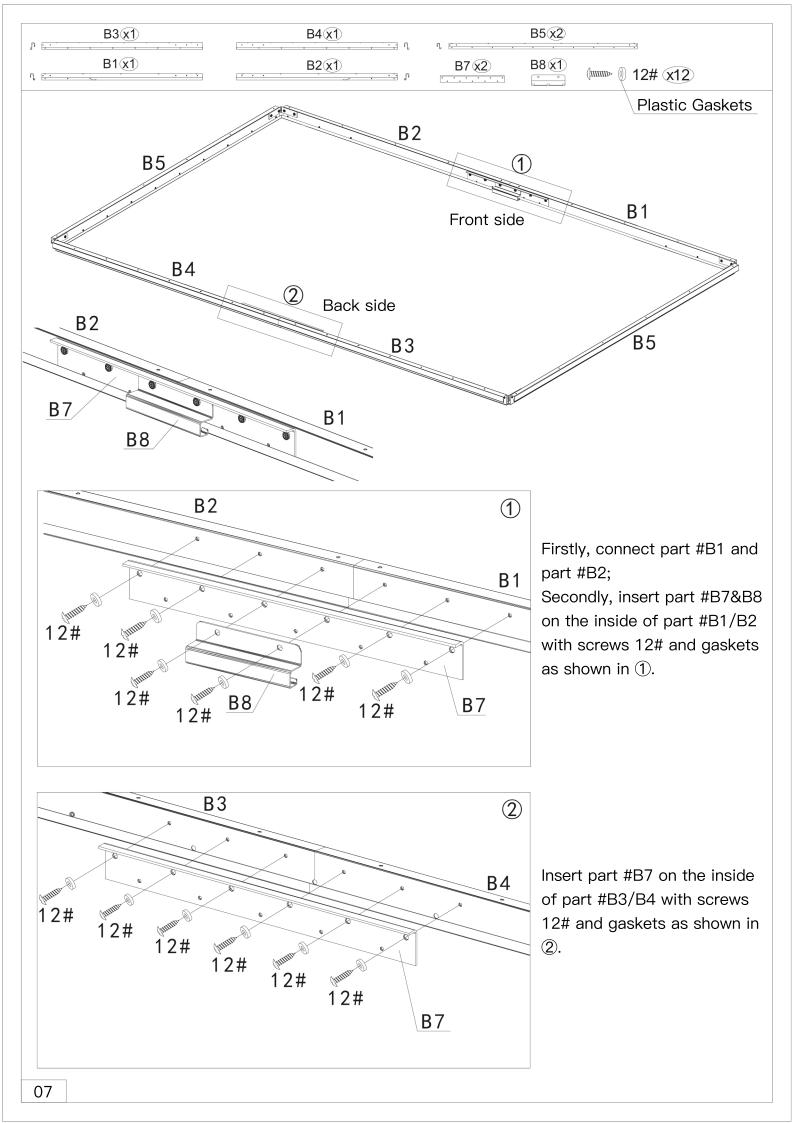


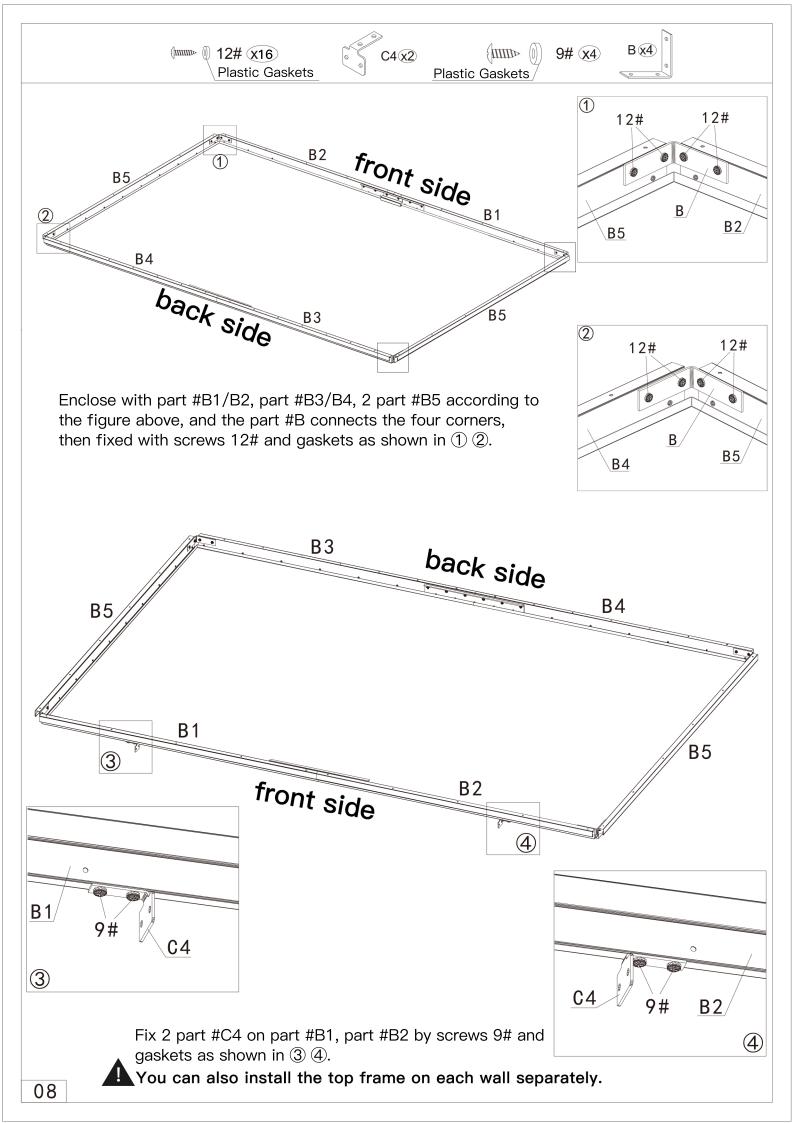


1# x41 1 3# x4 Steel Gaskets


Plastic Gaskets


Place the assembled beam (B1/B2, B3/B4, B5) on the upper end of the wall panel, and fix with the screws 1# and gaskets as shown in ①②.

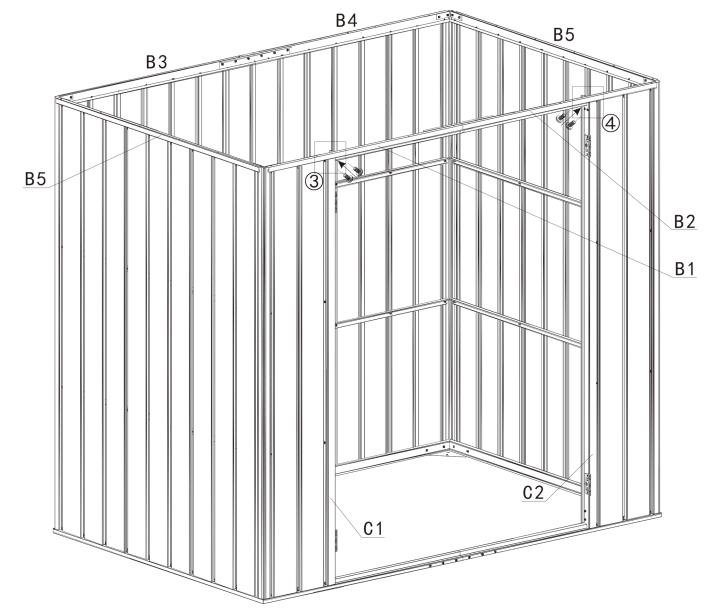


Fix the upper end of the part#C1/C2 with part#B1/B2 and part#C4 by using screws 3#, the nuts and gaskets are on the back side as shown in 34.





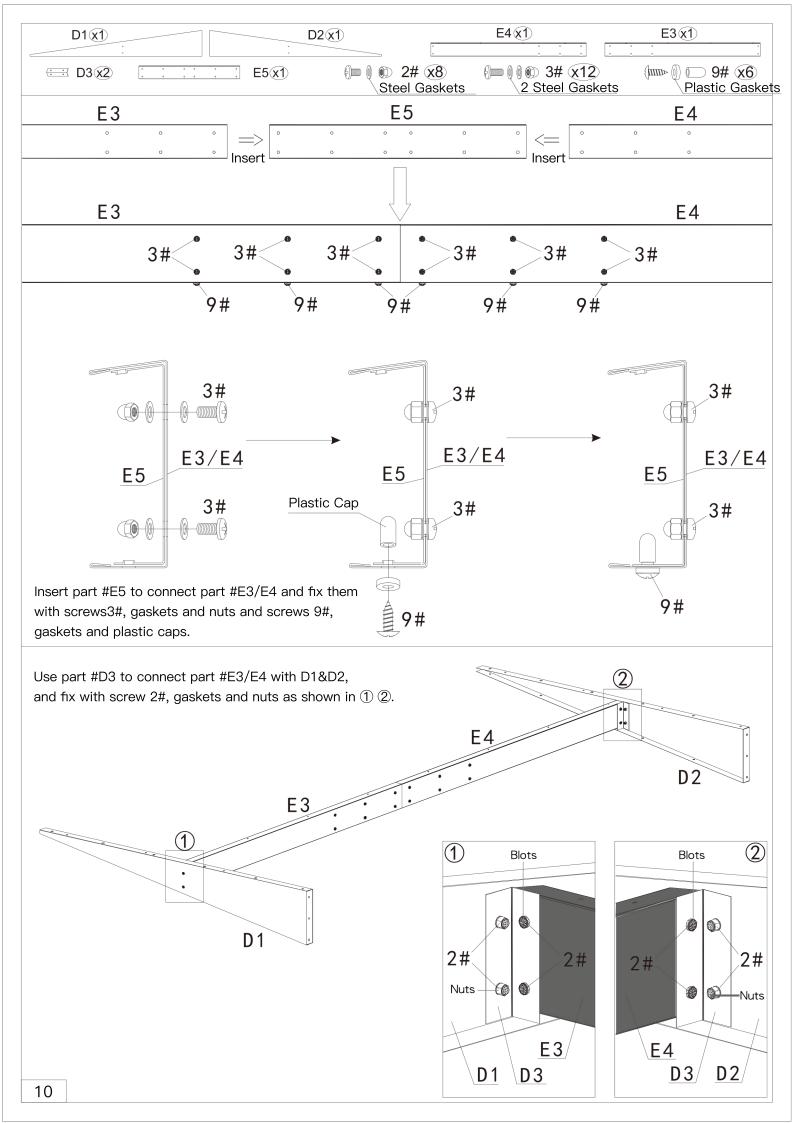


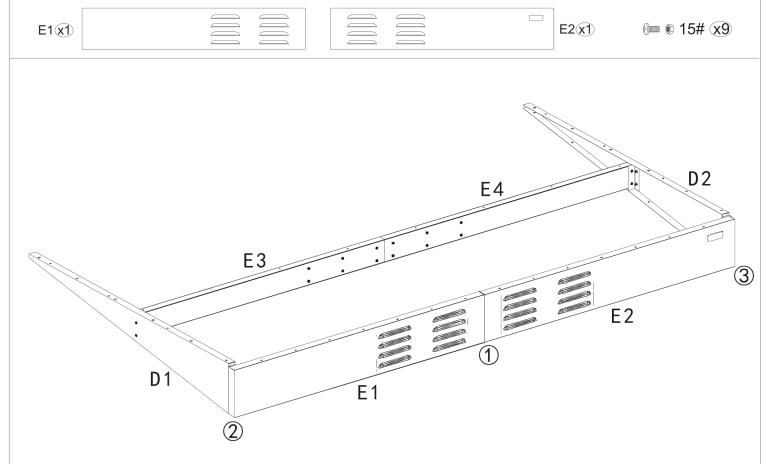



Install Top Frame:


Connect part #E1/E2 first, as shown in ①;


Then combine with part #D1 and part #D2 respectively, as shown in 23.

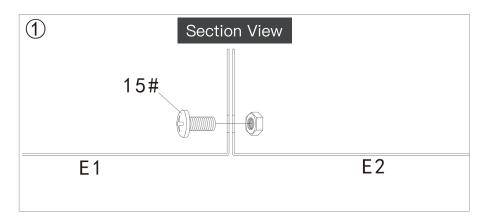






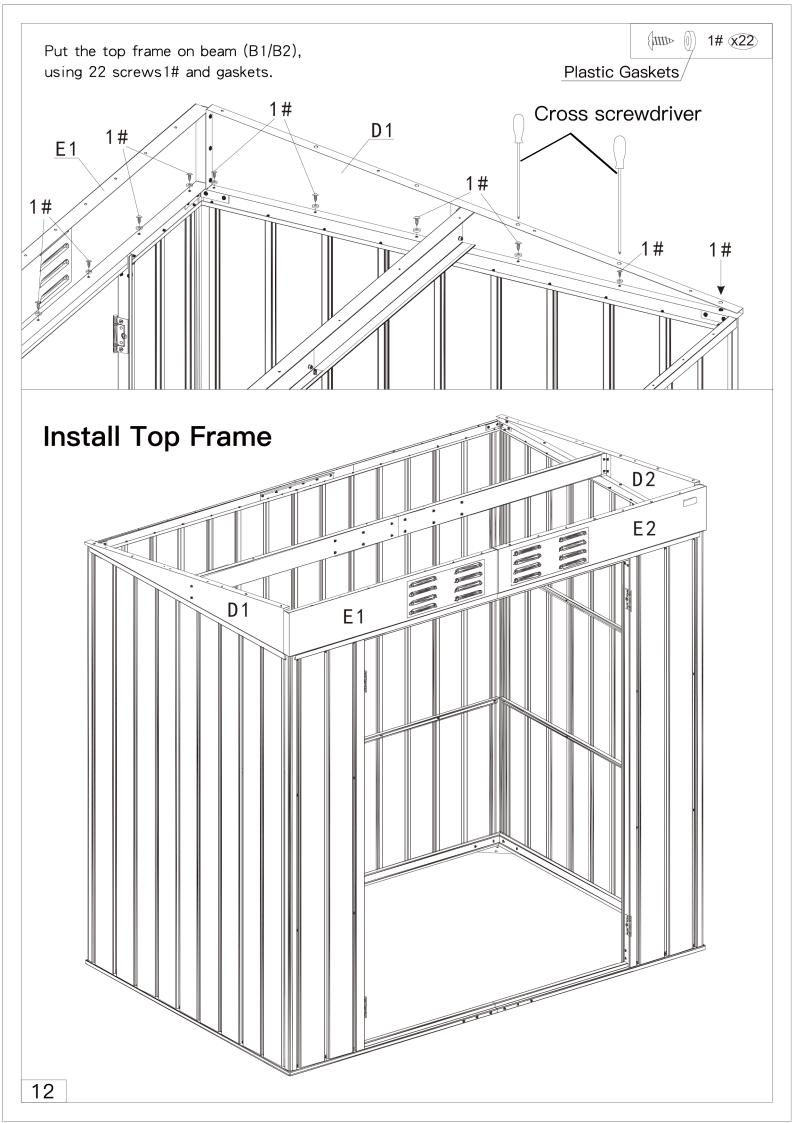


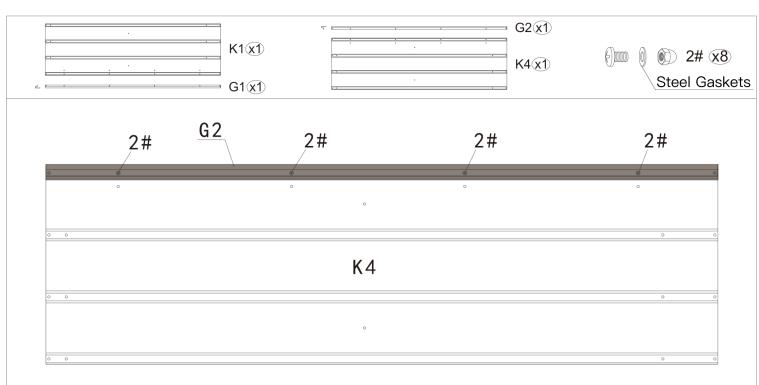

Assemble the TOP ROOF


Assemble the part#G1/G2 to the one side of part#K1/K4 with screws 2#, gaskets and nuts.

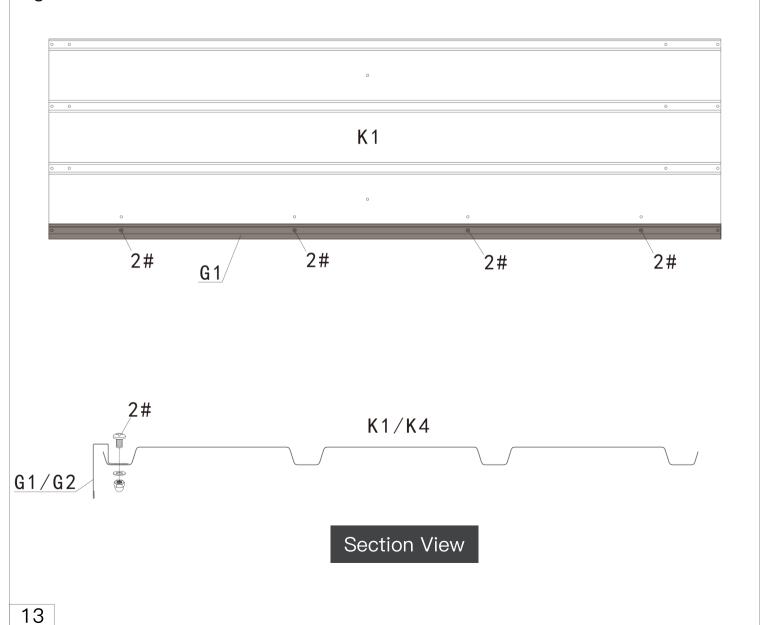

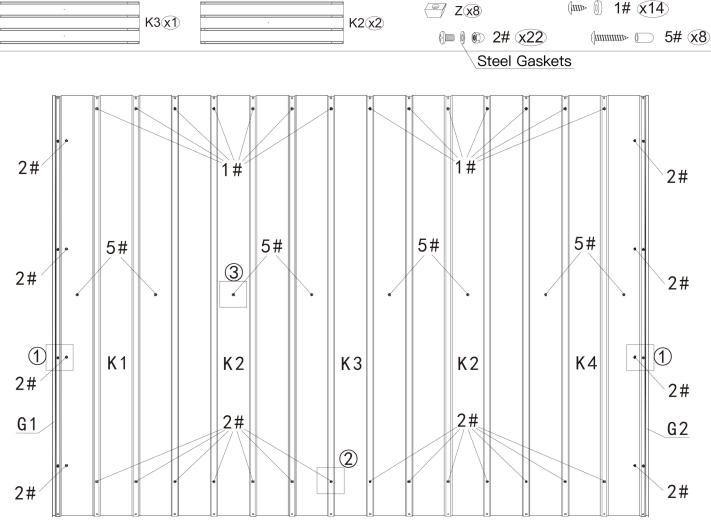


The roof panel part#K1/K2/K3/K4 is laid in order; the roof panel K1/K4 is fixed with G1/G2 & D1/D2 by using screws 2#, gaskets and nuts as shown in ①; the roof panel K1/K2 & K3/K4 are fixed with E1/E2 by using screws 2#, gaskets and nuts as shown in 2. Then fix with screw 1# and gaskets to part #B3/B4.

1

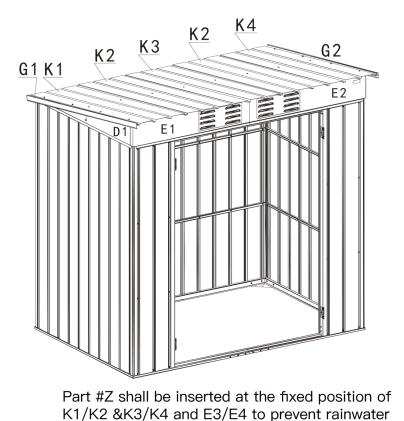


intrusion as shown in 3.

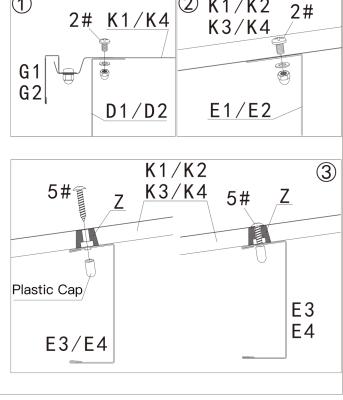



2 K1/K2


Plastic Gaskets

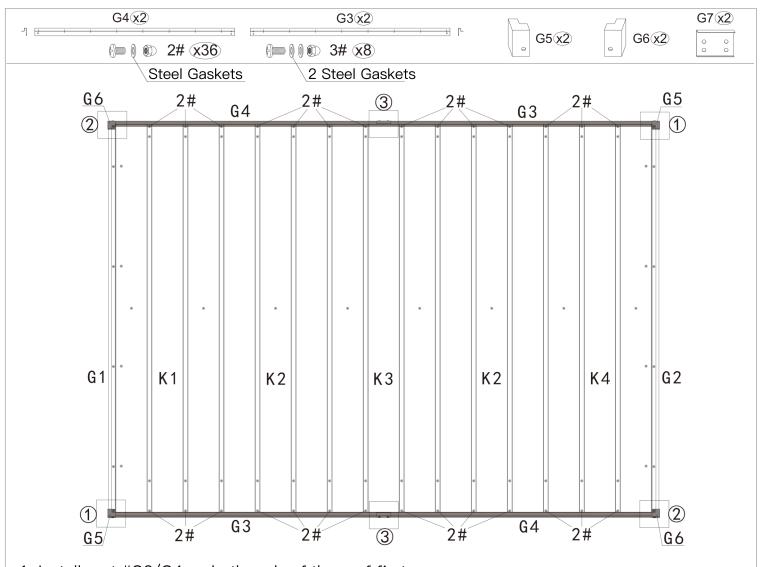


1. Install part #G3/G4 on both ends of the roof first; Install part #G7 at the joint of part #G3/G4, and fix it with 2# screws, as shown in ③.

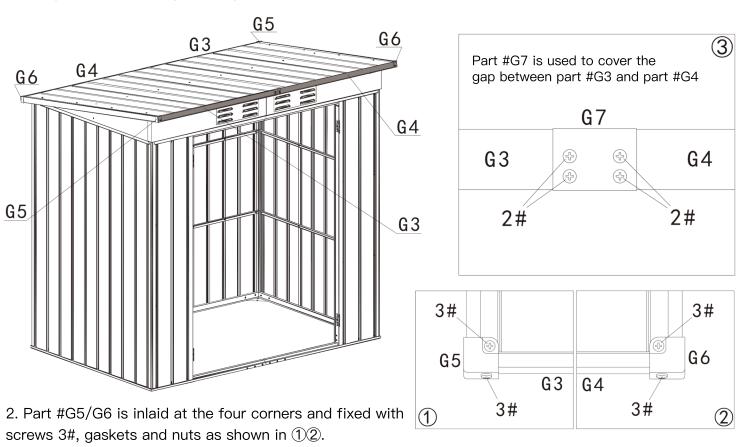


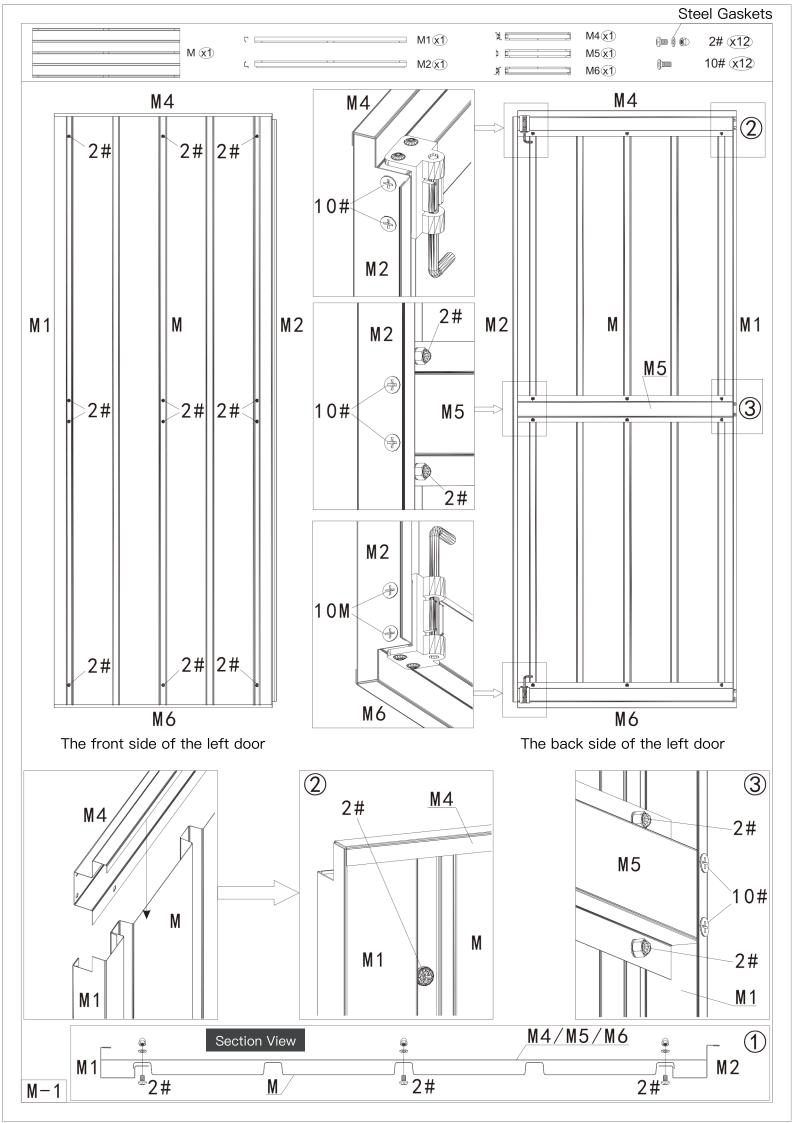


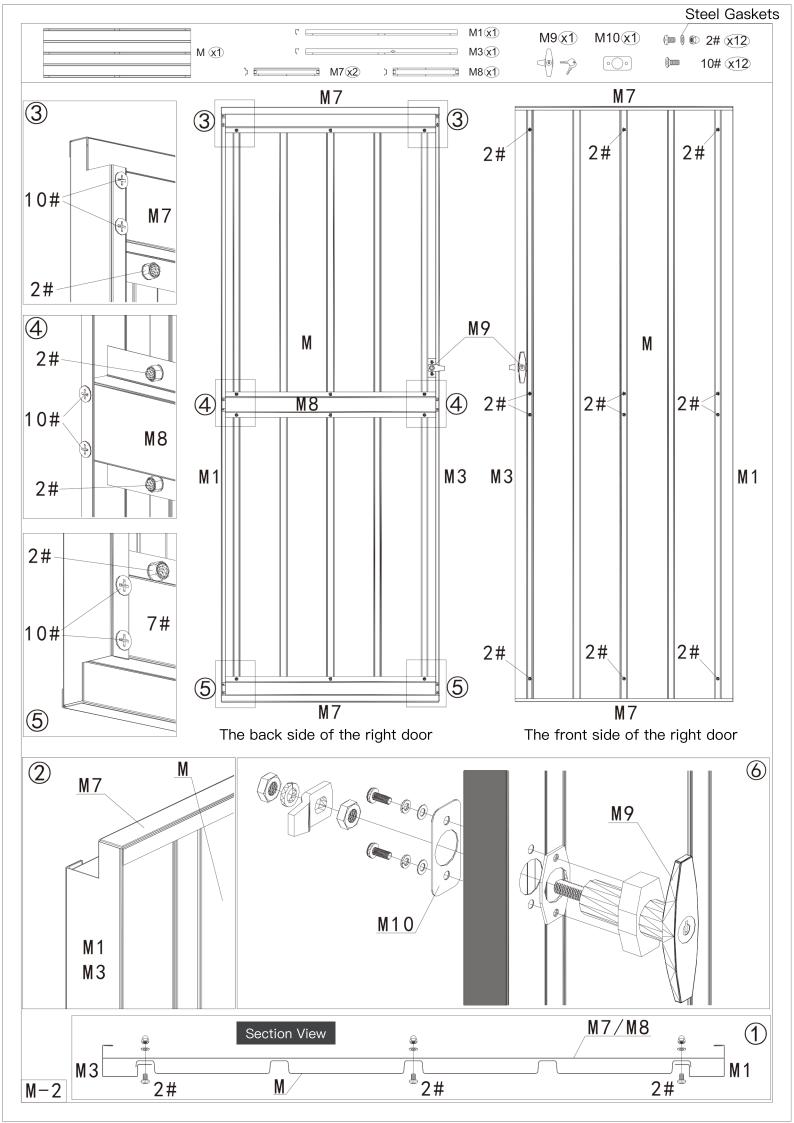

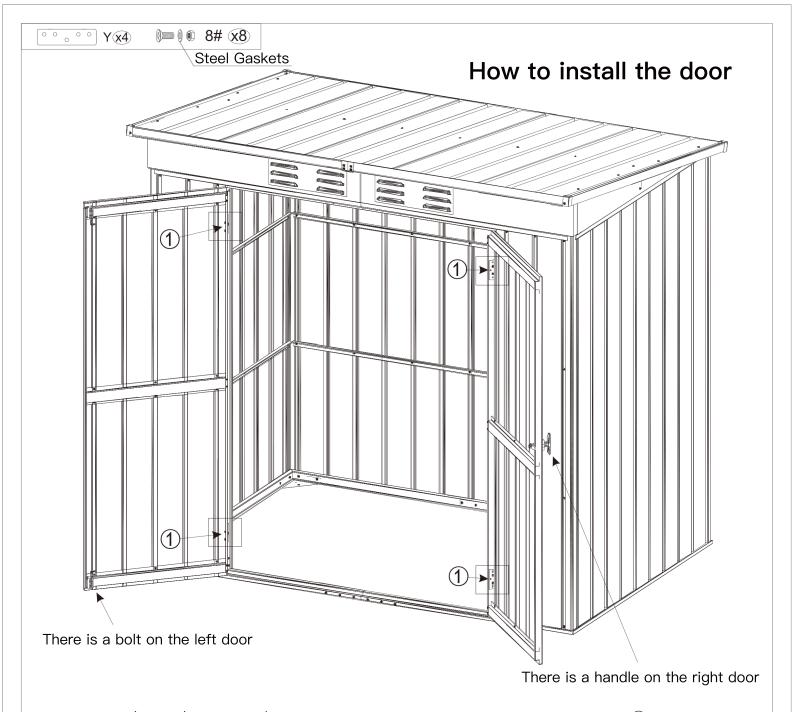

Fix the hinge (part#Y) to the left/right door by screws 8#, gasket and nut as shown in ①.

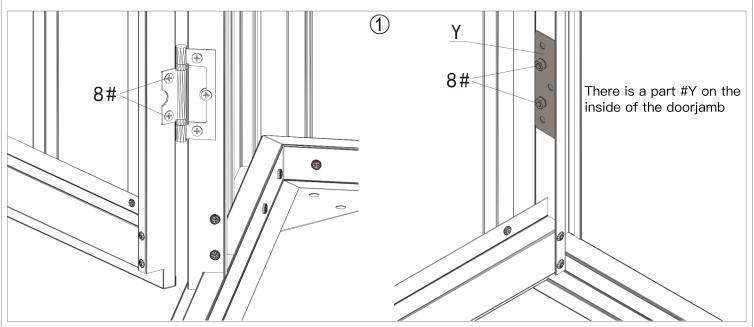


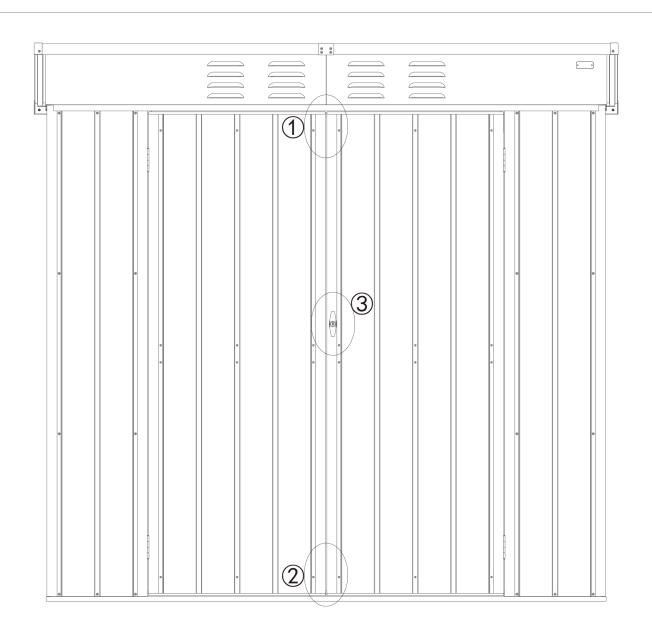



Open the door: insert the key, rotate 180° counterclockwise, and rotate the handle counterclockwise to open the door.

Lock the door: close the door, insert the key, rotate the handle clockwise, then rotate the key 180° clockwise and pull the key out.

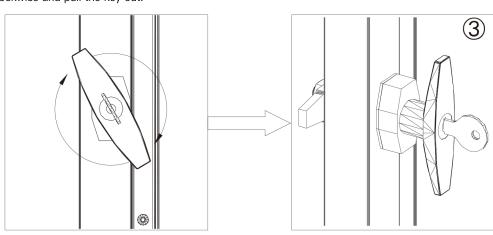

Insert the bolt and locks the door

(



Thanks for your purchase.

At domi outdoor living, we believe in our products.

That's why we provide a 12-month warranty and friendly, casy-to-reach after-sales service. So if you have any questions about our product and assembly-

Support:



,please feel free to contact us. We will be here for you.



After-sales contact email:

service@domioutdoorliving.com

Business cooperation contact email:

marketing@domioutdoorliving.com

Please tell us your order ID when contact.

Attach photos of damaged part for instant reply.