


Two-Piece Toilet

Installation Instruction

Single Flush

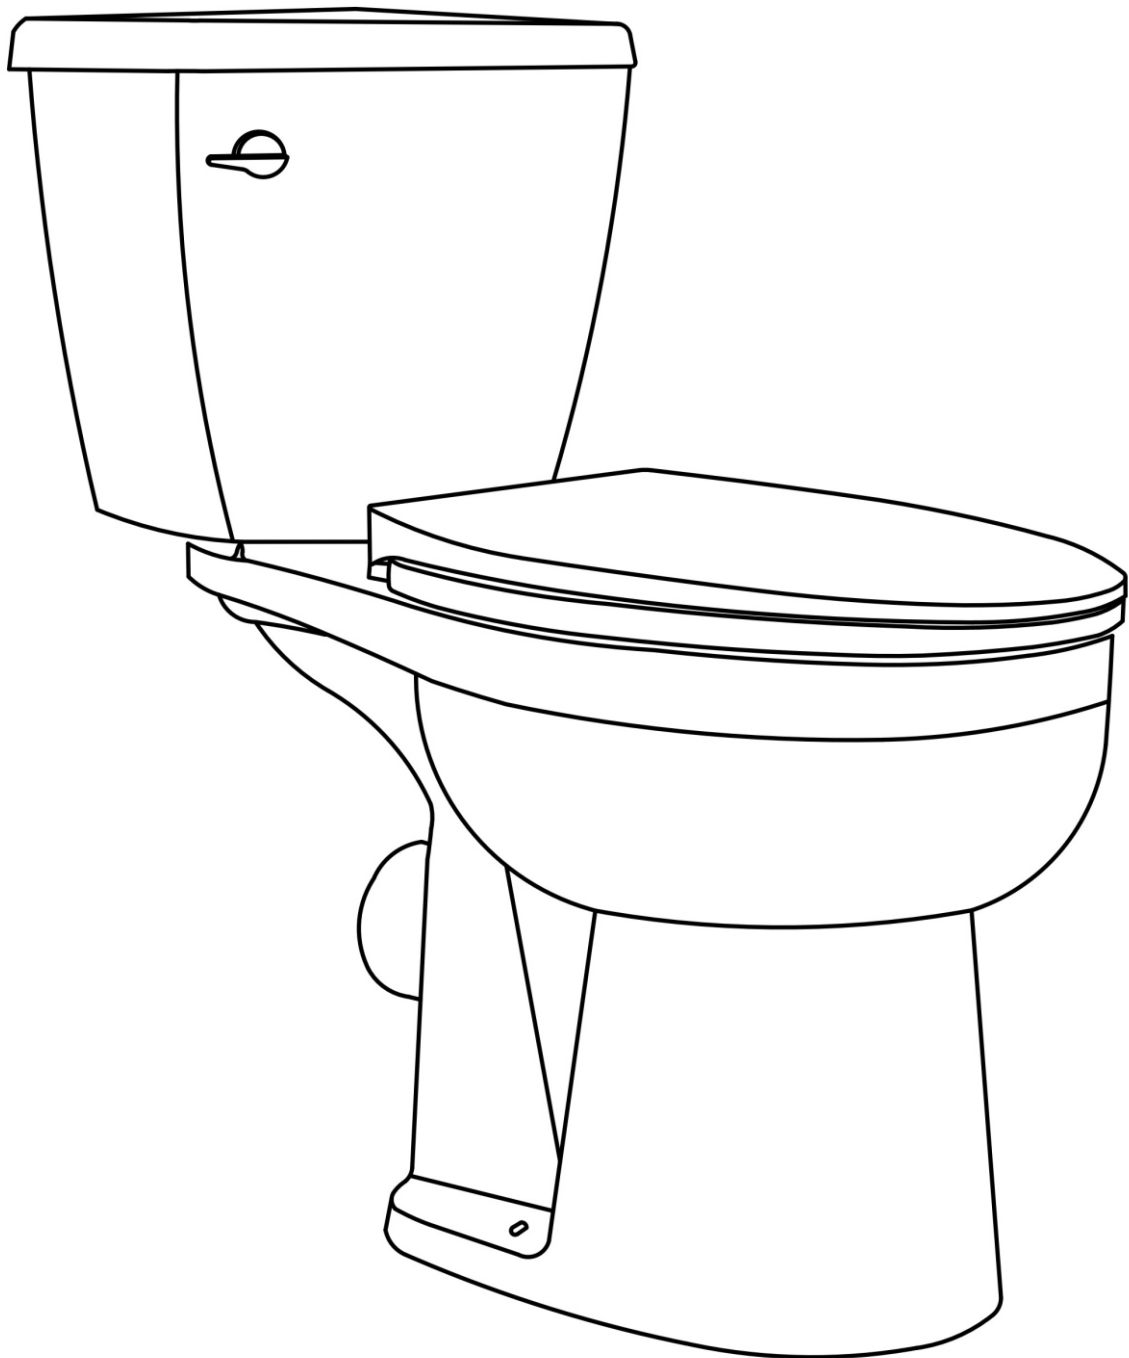

THANK YOU!

Dear Valued Customer,

Thank you for choosing our ceramic Two-Piece Toilet. We hope our products can improve the quality of your life.

As a valued customer, your comments and opinions are very important for us. If you have any concerns, questions, or comments, we hope that you could bring them to our attention.

Please keep the box and packaging materials until your product is completely installed.

If you have any questions or concerns, please contact us:

607-645-4819
lyla@miuara.com

Sincerely
Service Team



Two-Piece Toilet Installation Instruction



Prior to Installation:


- Before installation, please make sure that the toilet without damaged during shipping.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- Remove old toilet.
- Make sure mounting surface is CLEAN and LEVEL..

General Recommendations:

Please read installation and maintenance instructions thoroughly before installing the toilet.
Be sure to use proper tools and always wear proper personal safety accessories for your protection.

Two-Piece Toilet Installation Instruction

SUGGESTED TOOLS AND MATERIALS




Putty Knife



Wrench




Tape Measure



Level



Water Supply Kit



Flat/Cross Head Screwdriver



Safety Glasses



Hacksaw

- Installation tools are not provided, please prepare by yourself.

PARK LIST

Push button, tank lid, water fitting, soft-close toilet seat, wax ring, bolts kit, bolt covers, installation instruction.

The step-by-step guidelines in the installation instructions are a general reference for installing a Two-Piece Toilet. Should there be any discrepancies, we cannot be held liable. It is recommended to install all Products by hiring a licensed professional.



1. Read the complete instruction manual before beginning installation.



2. Confirm that your model will fit in intended location and plumbing fixtures are located where legally required before beginning installation.



3. Not all drawings on this manual are drawn to scale. Please refer to the model chart.

4. Two people are recommended to install and move this product.

5. Product is FRAGILE! To avoid breakage and possible injury handle with care.

NOTE: Drawings may not exactly define contour of the product.

Two-Piece Toilet Installation Instruction

INSTALLATION STEPS


1. Remove Old Toilet

- Turn off the water supply.
- Flush the toilet to empty the tank. Remove any water left in the tank or bowl.
- Disconnect the supply line from the tank.
- Remove decorative caps. Unscrew nuts that attach the toilet to the floor.
- Remove toilet.
- Make sure the water supply valve is shut off before installation.
- Remove old closet bolts from closet flange. Clean any old wax, putty, etc. from base area.

INSTALL THE NEW TOILET

1. Cover the connecting pipe onto the wateroutlet of product, then put it down gently. Cover the connecting pipe to the water outlet in the wall with the product.


Note: The gasket should be covered tightly to makesure the sealing performan

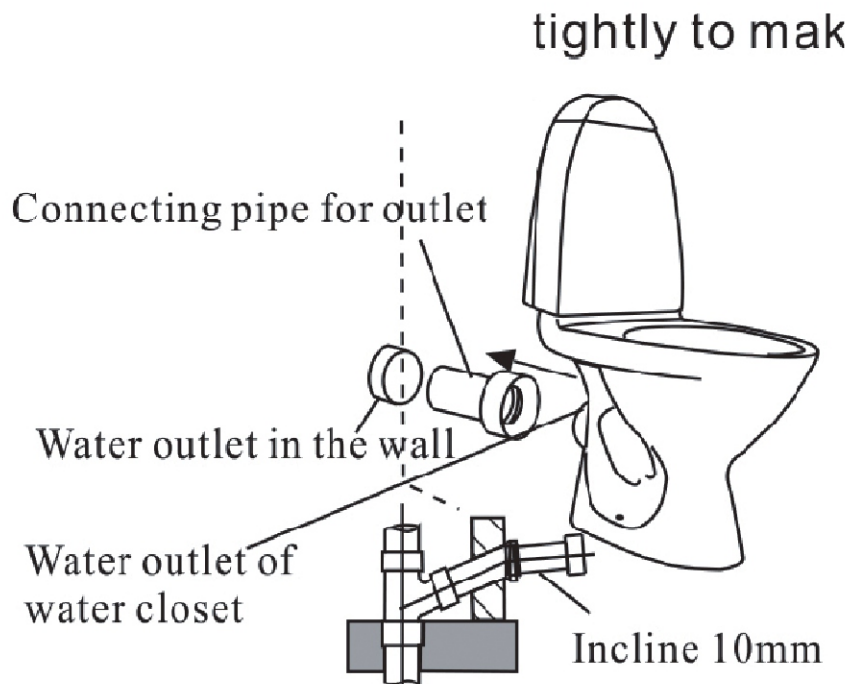



NOTE: Drawings may not exactly define contour of the product.

Two-Piece Toilet Installation Instruction

2. Install the water supply valve, then connect the water inlet soft pipe and filter. Check the connection carefully to make sure there is no leakage.

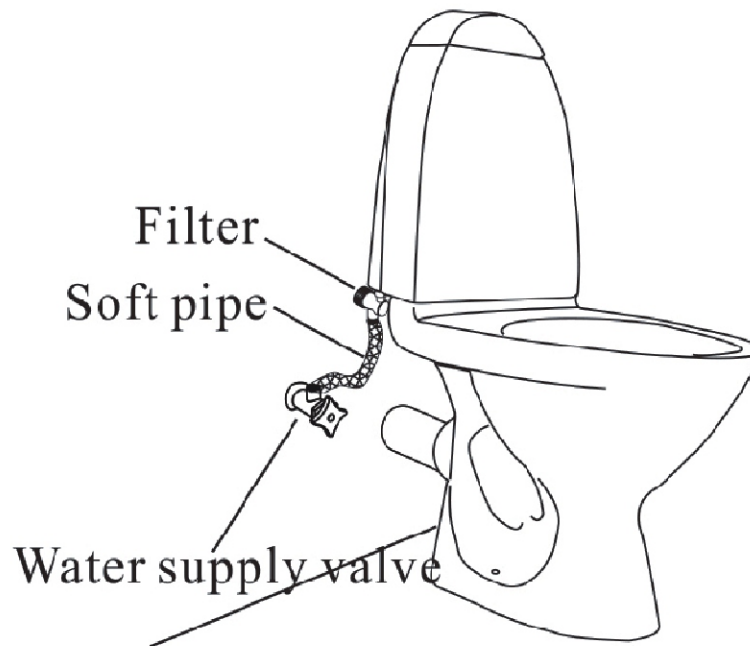

3. Installation method of anchor bolts

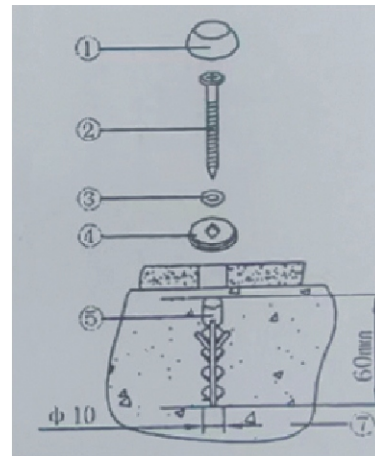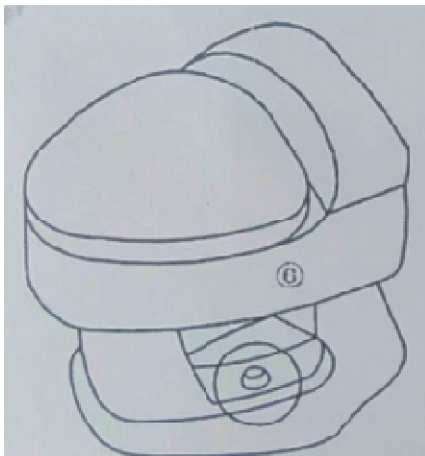

INSTALL THE TANK

1. Insert the bolt with the Metal washer and Rubber washer through the tank and place the Rubber washer and then Metal washer, and tighten the nut below the tank. (The screw placed as the below pictures)

NOTE: Drawings may not exactly define contour of the product.

Two-Piece Toilet Installation Instruction



2. Position tank on bowl by centering gasket on bowl inlet, and insert the bolt down through the holes of the bowl.




3. Place the Rubber washer and metal washer under the bowl holes and tighten the nut. Making sure tank is level.



4. Tighten the bolts evenly. Do not over tighten

5. Connect water supply and turn on the water.


6. Flush several times and check for leaks. If the connections have been properly assembled, a slight tightening of the nuts should stop any leakage.



NOTE: Drawings may not exactly define contour of the product.

Two-Piece Toilet Installation Instruction

7. Adjust tank water level to the proper marked waterline by rotating threaded rod clockwise to raise water level or counterclockwise to lower water level.




8. Carefully set tank lid onto the tank.

9. Install the seat cover



Install Flush Button- Single Flush Button on Side Water Tank Style

- I. Installation Profile.

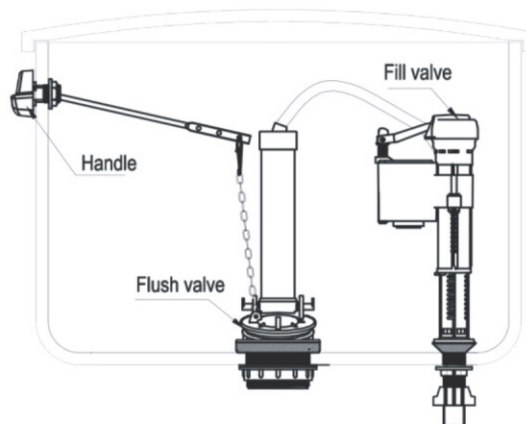


NOTE: Drawings may not exactly define contour of the product.

Two-Piece Toilet Installation Instruction


II. Steps

1. Preparation: Clean the tank and pipe.


2. Installation




Disassemble the adapter and inlet nut for fill valve installation. Position valve inside tank. Push down on the valve shank (not the top) while tightening inlet nut. Screw the valve shank clockwise and pull the valve body to the correct height.




Adjusting the water level by removing the clip and turn outer float to the right position. Move the floats up or down along the valve body to the desired height. Click back into position and replace plastic clip.




Twist the valve body out of the base.




Disassemble outlet nut, outlet washer for flush valve installation. Position the valve inside tank. Push down on the valve body while attaching outlet washer and tightening outlet nut. Make sure the seal washer touches surface of cistern firmly.




Slide the re-fill tube over the re-fill tube port. Trim the re-fill tube to right size to prevent kinking, insert the other end of the re-fill tube onto the re-fill cap of overflow tube.



Twist the nut and washer out of the handle.



Insert the level into the tank through the handle hole. Adjust the direction of handle according to above figure. Tighten the washer and nut.



Attach the hook to the hole of lever. Check whether the length of the chain is appropriate. The flush valve can not work normally if the chain is too long. Too short chain may lead to leakage.

III. Trouble Shooting Guide

1. Flush Valve

No.	Issue	Possible Reason	Solution
1	Water leaking from outlet	Valve not installed correctly	Check installation and re-tighten
2	Water leaking from flapper seal	Broken washer; Debris on washer / flapper; Length of chain is too short	Change washer; Clean washer with warm water so surface is clear; Adjust length of chain
3	Flush valve not working	Length of chain is too short	Adjust length of chain

2. Fill Valve

No.	Issue	Possible Reason	Solution
1	Erratic or no water fill	Blockage in water supply; In-correct float valve adjustment	Check both fill valve and water supply line for blockage; Adjust float valve to correct position
2	Water level too high / low	In-correct float position	Adjust float valve to correct position
3	Water leaking from base of fill valve	Fault with in-let installation (loose); Surface of cistern un-even	Check screw for fitment and retighten if necessary; Contact your ceramic supplier

Please keep the instruction for future use.

Products may be amended in line with continuous improvement, please refer to actual product.

NOTE: Drawings may not exactly define contour of the product.