

POST LIGHT

Assembly Instructions



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

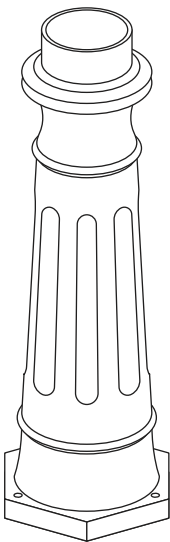

Base




Pole



Fixture




Fixture Top



Mounting Unit



Anchor Bolts



Wire Nut


***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

POST LIGHT

Assembly Instructions

STEP 1

Route the electrical wire from the power supply underground and out through the middle of the installation area. Screw the **anchor bolts** into the **mounting unit**. Fill the hole with concrete (not included) and insert the assembled **mounting unit** before the concrete dries. The **mounting unit** should be at ground level.

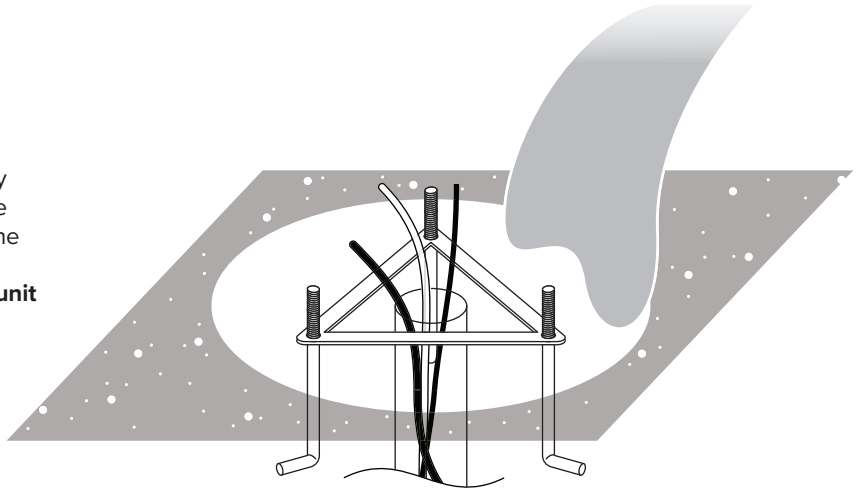

STEP 2



Connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

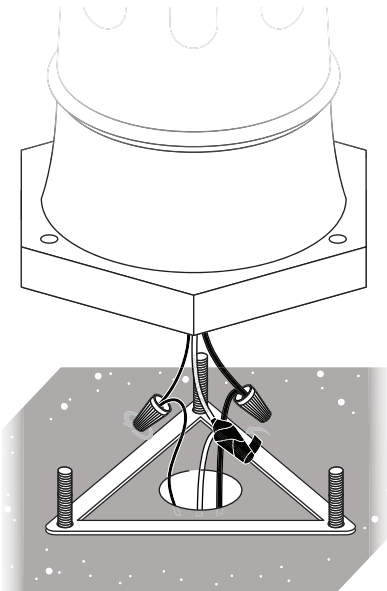

STEP 3

Secure the **base** to the **mounting unit** and attach the **pole** to the top of the **base**. Attach the **fixture** to the **pole**, install a bulb (not included), and secure the **fixture top**.

