

## ITEM #: RV-W1368

Kira  
Home

### IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.  
**Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.

**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.



**For any replacement parts or installation issues, please Contact Us!**

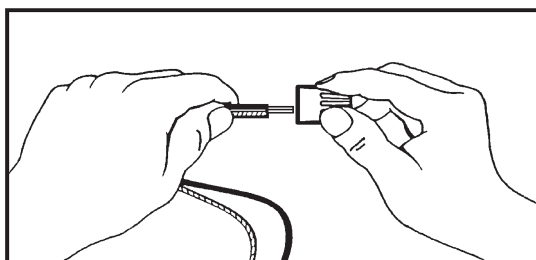
**Email:** help@kira-home.com









**Facebook/Instagram:** @KiraHomeDecor

**Phone:** 888.208.2085

### INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided.
2. Place Backplate Assembly (E) against the wall by inserting Nipple (D) through the appropriate hole located on Backplate Assembly (E). Adjust Nipple (D) and hex nuts until 1/4' of the threaded portion is visible. Remove the fixture from the wall and set it aside.  
**Note: If 1/4" of Nipple (D) is not visible, remove Backplate Assembly (E) and re-adjust Nipple (D) to proper length.**
3. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).



Connect to BLACK house wire	Connect to WHITE house wire
BLACK 	WHITE 
PARALLEL WIRE (ROUND & SMOOTH) 	PARALLEL WIRE (RIBBED / RIDGED) 
WHITE OR GREY WITH TRACER 	WHITE OR GREY WITHOUT TRACER 
BROWN, GOLD OR BLACK WITHOUT TRACER 	BROWN, GOLD OR BLACK WITH TRACER 

- A.** Connect the ground wire (bare copper or green) from your fixture to the:
  - 1) ground wire in the junction box, or
  - 2) ground screw in the junction box
- B.** Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C.** Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

4. Place all wires and Wire Connectors (C) back into the junction box.
5. Place Backplate Assembly (E) against the wall, ensuring Nipple (D) is protruding through the holes in Backplate Assembly (E). Secure the fixture in place to the Mounting Plate (A) with Decorative Cap (F).  
**Note: If the fixture doesn't sit flush against the ceiling, readjust Nipple (D).**
6. Secure Shade (I) to Socket (G) with Socket Cap (J) Socket Ring (H).  
**Note: Socket Cap (J) and Socket Ring (H) should already be attached to Socket (G). Remove Socket Cap (J) and Socket Ring (H) prior to installing Shade (I).**
7. Install light bulb (not included) into Socket (G).

Enjoy your new fixture!

*Kira Home*

ITEM #: RV-W1368 - PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Ladder, Measuring Tape

