

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirements.


## Installation Steps

### For Semi-Flush

1. Attach two screws to the mounting strap, and secure with two lock nuts. (You can adjust the length of the screws if necessary.)
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Adjust the arms of the fixture according to the drawing of the package.  
**Important to know:**
  - a. The distance between the arms should be equally distanced.
  - b. The arms should be fixed securely.
4. Cut the redundant wires if necessary, and make wire connections with wire nuts:
  - Connect the smooth wire (marked) from fixture to the black wire from power source.
  - Connect the ridged wire (unmarked) from fixture to the white wire from power source.
  - Attach the grounding wire and house grounding wire to the mounting strap with a green grounding screw.
 Carefully tuck wires back into the outlet box.
5. Unscrew two bolt nuts from the canopy-1, attach the canopy-1 to the mounting strap, and secure with the bolt nuts.
6. Attach the nipple to the coupling of the socket base, and secure with a nut. (You can adjust the length of the nipple.)
7. Attach the stem, cap-1 and cap-2 onto the coupling by inserting the nipple and secure with nut.
8. Install bulbs. (Please do not exceed the maximum capacity, which is recommended on the package.)
9. Attach the glass shade to the fixture, secure with rubber pad, metal pad and nut. Then attach the cap-3 onto the glass shade and secure with finial.
10. Turn on the power at fuse or circuit box.

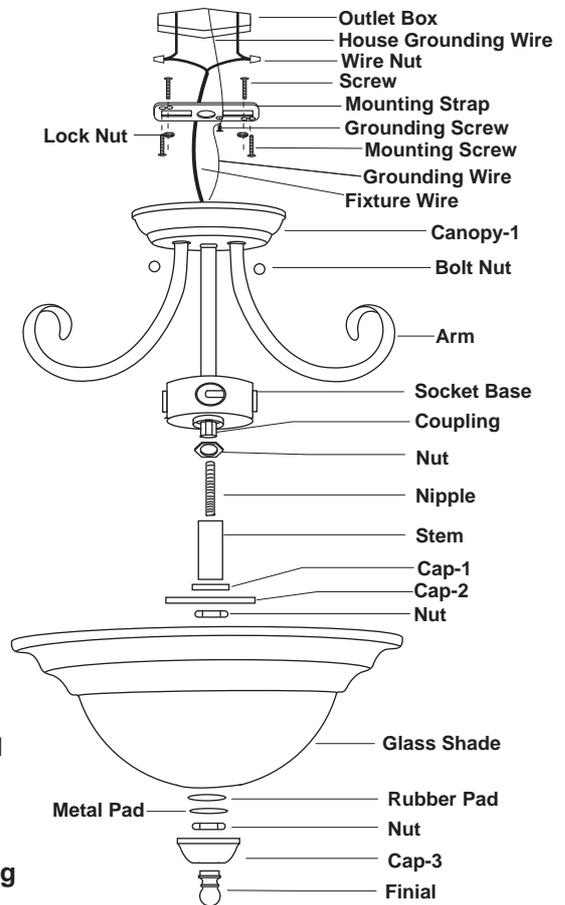

### Mounting Parts For Pendant

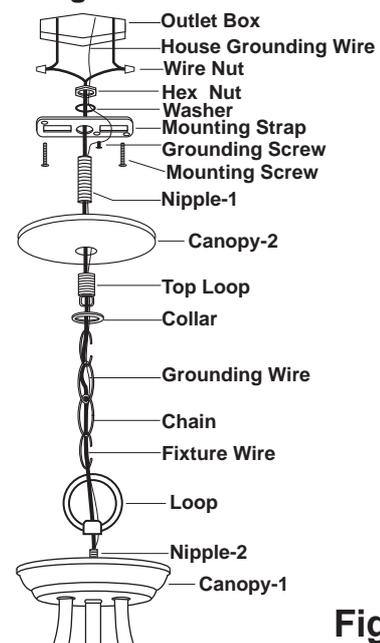

**Fig.1**

### For Pendant:(See Fig.1)

1. Attach the nipple-1 to the mounting strap, and secure with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Follow step 3 as for Semi-Flush.
4. Thread the fixture wire and grounding wire through the loop, and secure the loop onto the nipple-2.
5. Choose a certain length of the chain you need, and weave the fixture wire and the grounding wire through the chain links. Spread one end of the chain link to clamp securely to the loop.
6. Secure the top loop to the nipple-1.
7. Thread the fixture wire and grounding wire through the collar, canopy-2, top loop, nipple and mounting strap in order.
8. Clamp the other end of the chain link to the top loop.
9. Follow step 4 as for Semi-Flush.
10. Attach the canopy-2 to the mounting strap by inserting the top loop, and secure with the collar.
11. Follow steps 6~10 as for Semi-Flush.