
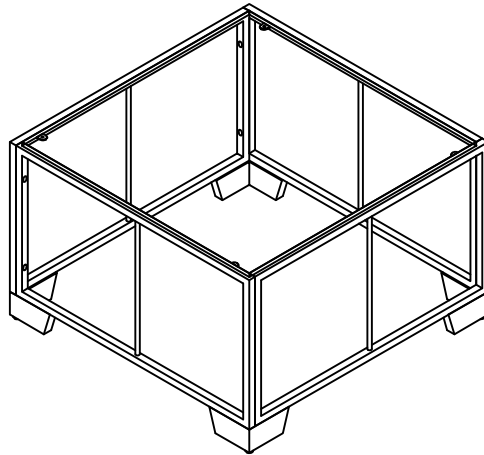
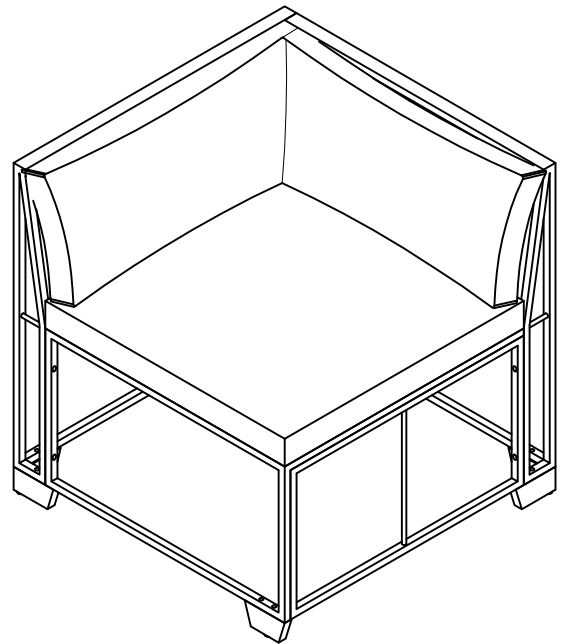


Assembly Manual

Sofa


1 Corner Spfa + 1 Single-Arm Sofa
+ 1Coffee fable
CS013-B

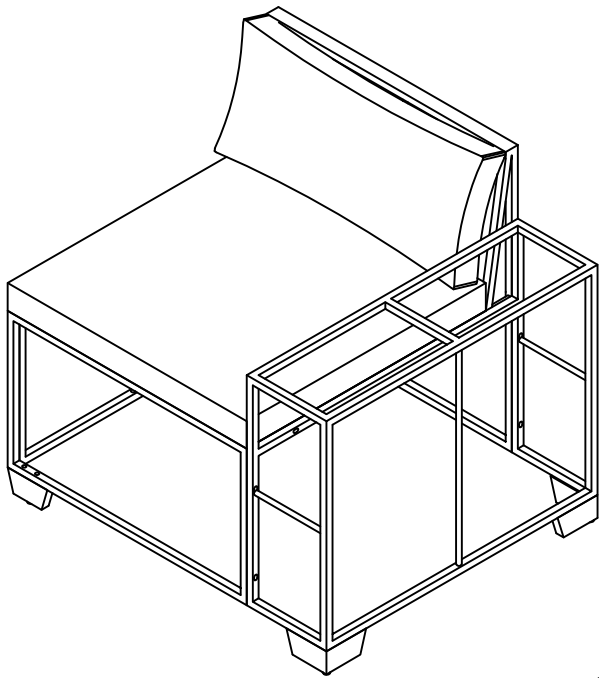

Please read this manual carefully before any operation and keep it properly for future use.

If any problems on our product, please feel free to contact us at ecservice@isunon.com.

Exploded View

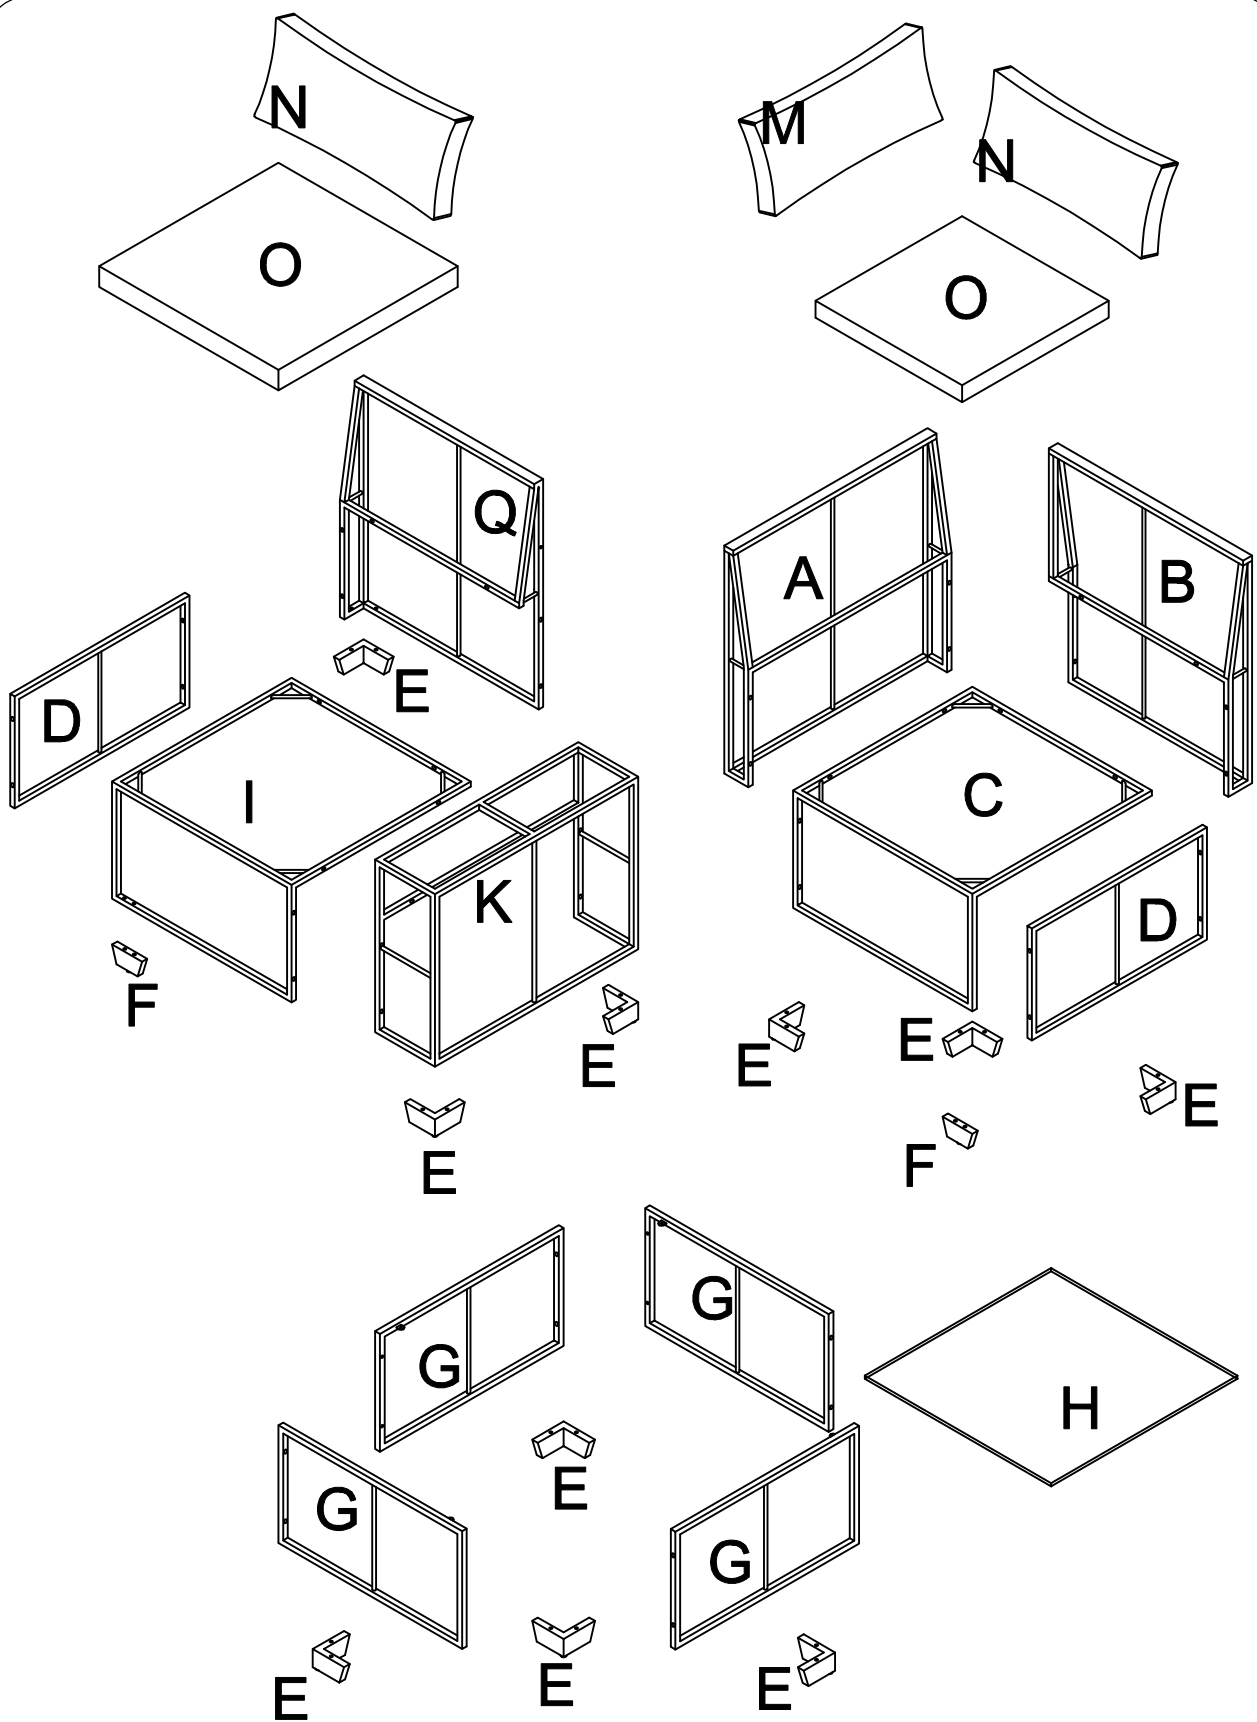


Components List

15 min

Assembly Time




One People

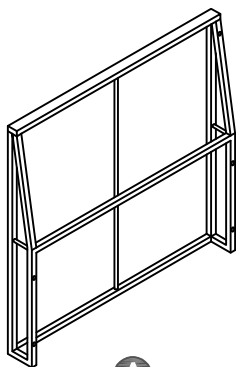


A

Back frame*1

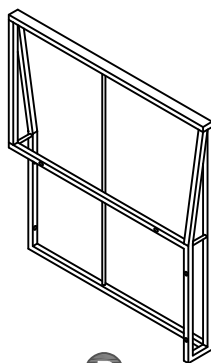


B

side frame*1

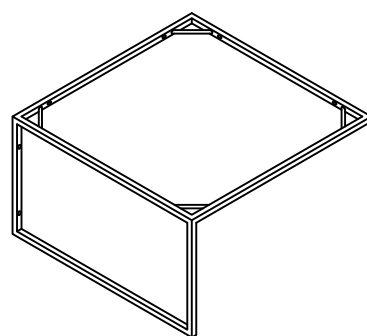


C

Seat frame*1




D

front frame*2




E

foot*10




F

foot*2




G

Tea table side frame*4

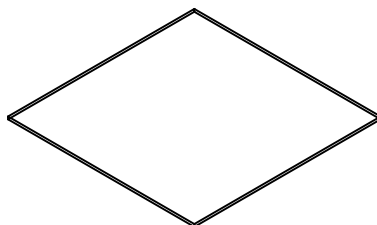

H

Glass countertop*1



M

Armrest pad*1


Components List

15 min

Assembly Time




One People




N

Back cushion*2

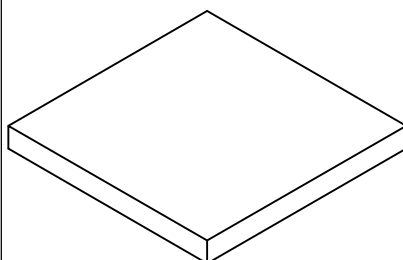


O

Seat cushion*2




K

side frame*1



Q

Back frame*1

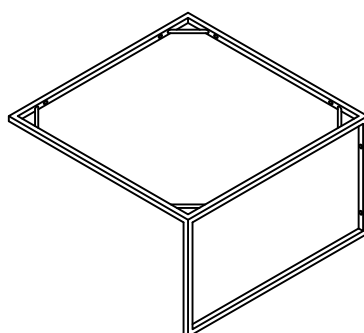

I

Seat frame*1

Components List









15 min

Assembly Time



One People




Note: The number after "+" sign indicates the extra piece(s).

1 	2 	3 	4 
Bolt M6x45mm 44+2	Washer M6x14*1.5mm 52+2	Allen wrench #5 1	Bolt M6x30mm 4+1
5 	6 	7 	8 
Nut M6 20+2	Allen wrench 10# 1	Bolt M6x35mm 2	Bolt M6x35mm 8+1
9 	10 	11 	
Non-slip mat 4	snap fastener 4	Allen wrench M4 1	

Assembly instruction



STEP 1

Connect the seat plate (C) and armrest (A) using the washers (2), bolts (1), nuts (5), and wrenches (3) (6). Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow you to make minor adjustments to their positions during the assembly process.

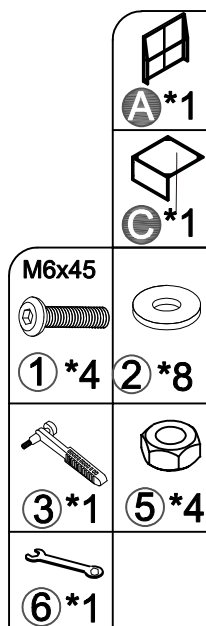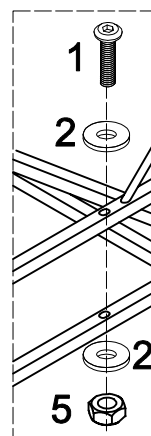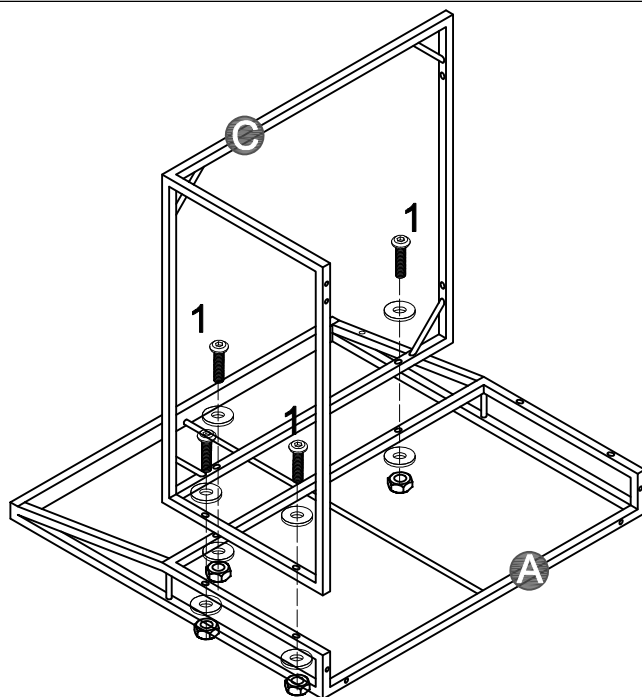

STEP 2


Use bolt (7) and install it into the upper left end of the backboard (B). Tighten the bolt to approximately 1 cm depth.

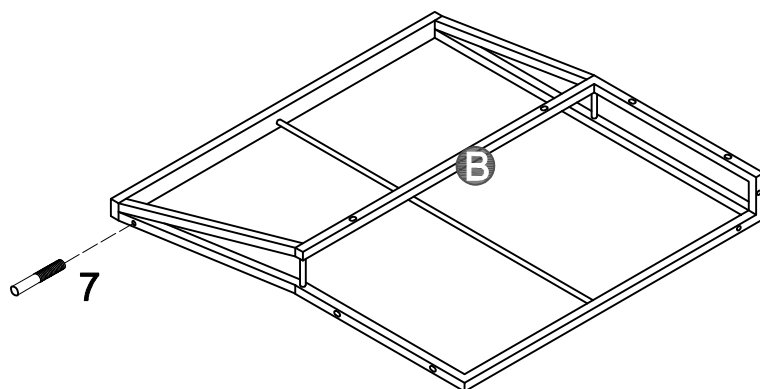

Assembly instruction

STEP 3




Align the backboard (B) with the armrest assembly. Ensure the headless screw rod at the upper end of the backboard is aligned with the hole at the upper end of the armrest.

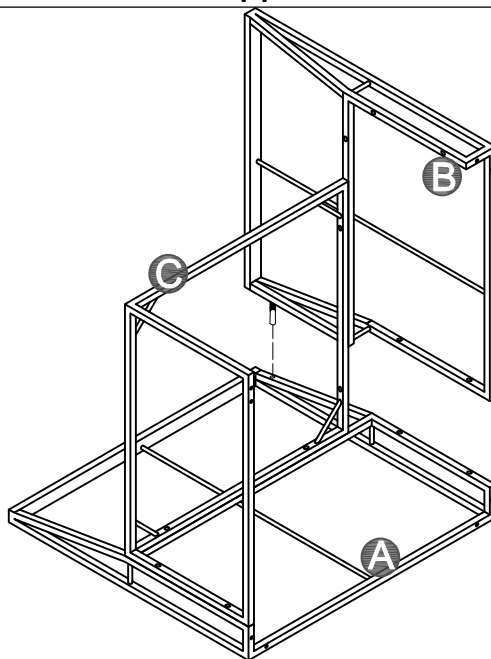

STEP 4

Connect the seat plate (C), backboard (B), and armrest (A) using washers (2), bolts (1), nuts (5), and wrenches (3) (6).


Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during assembly.

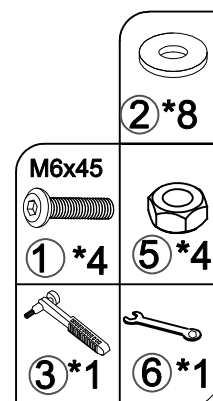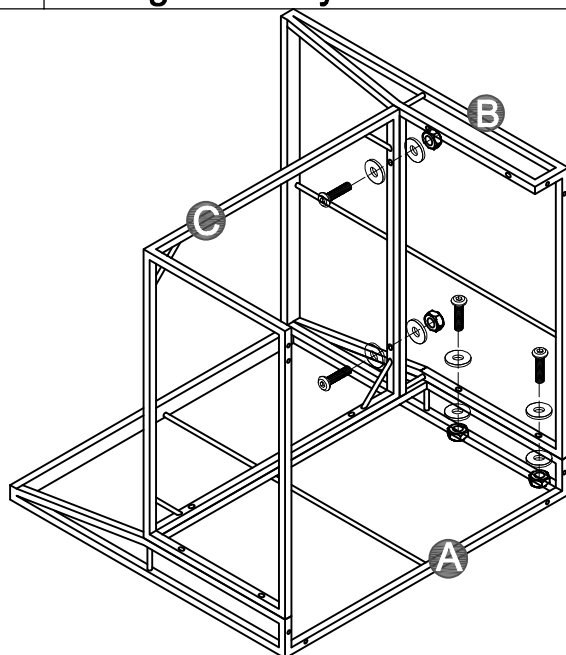

Assembly instruction


STEP 5

Connect the side panel (D), seat plate (C), and backboard (B) using washers (2), bolts (1) (4), nuts (5), and wrenches (3) (6). Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

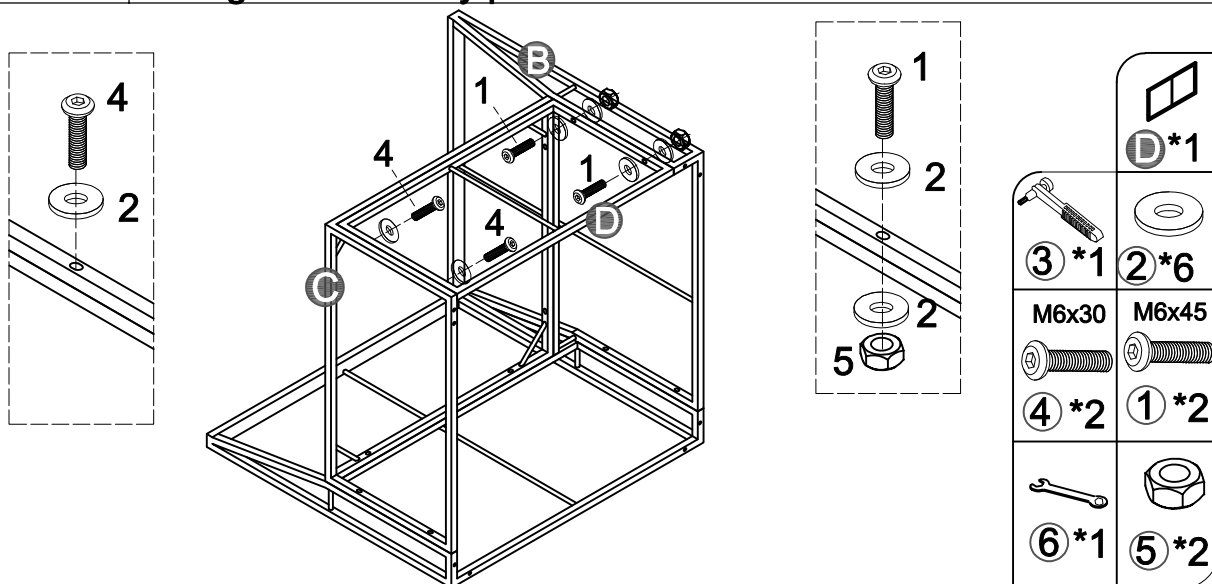

STEP 6


Use bolt (1) and wrench (11) to connect the plastic feet (E) (F) to the sofa. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

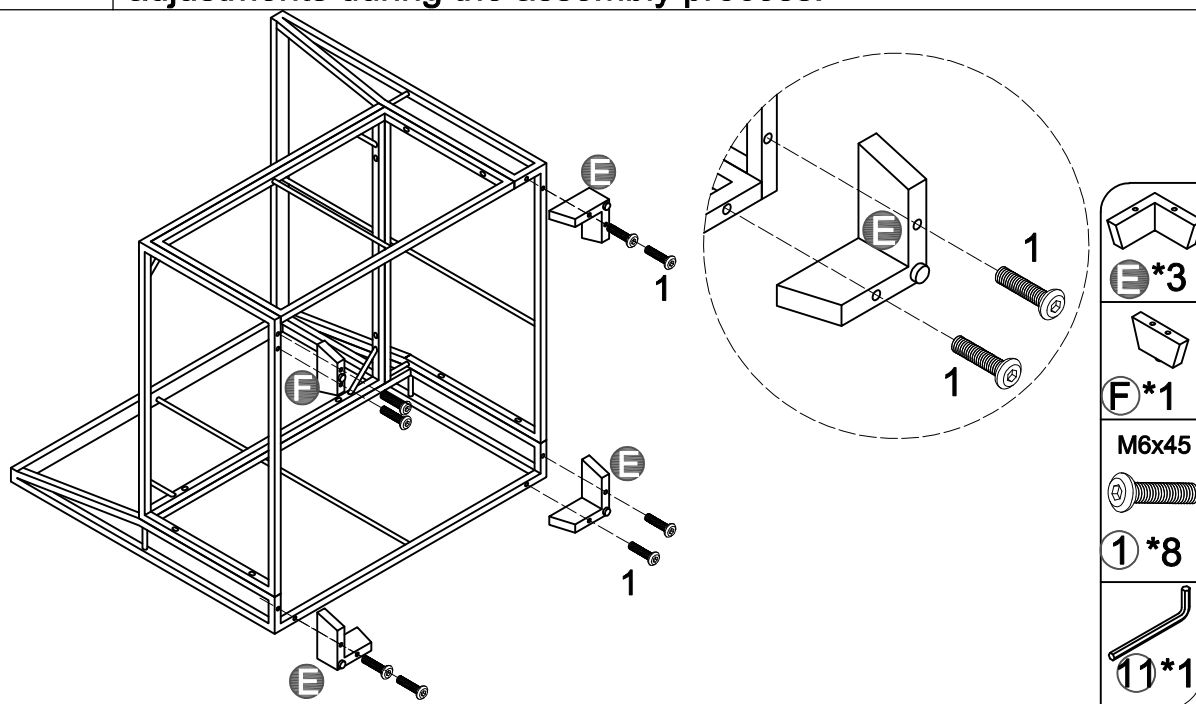

Assembly instruction


STEP 7

Connect the two sofas using the clips (10). Align the two sofas front to back, then snap them into place.

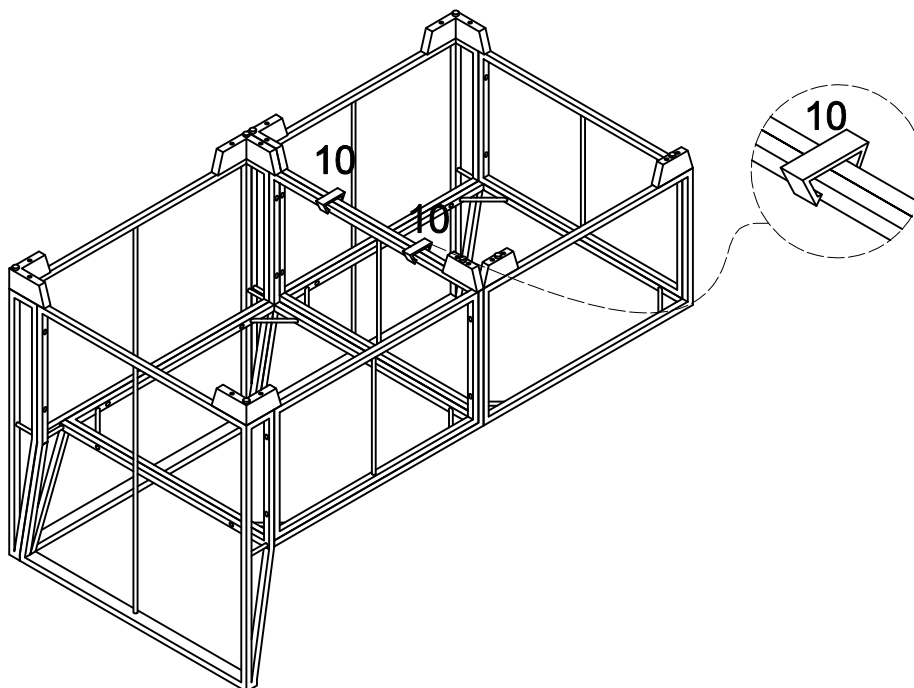

STEP 8



Place the seat cushion (O), armrest cushions (M), and back cushion (N) on the assembled product. Insert the end of the seat cushion (O) with the zipper opening toward the backboard (B). Insert the ends of the armrest cushions (M) and back cushion (N) with the zipper openings toward the seat cushion (O).

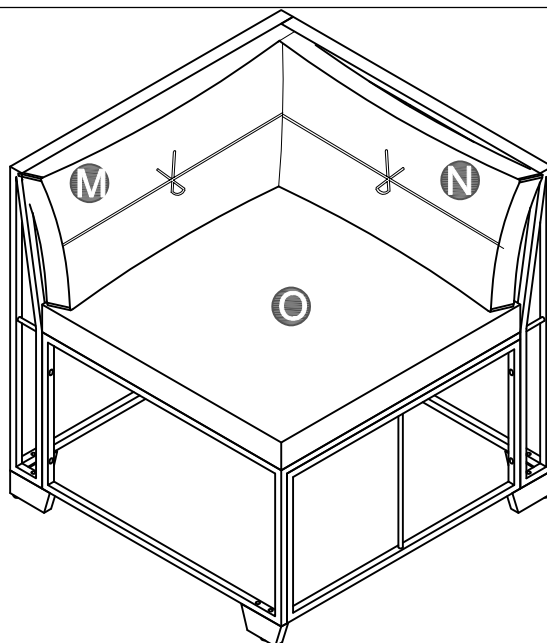

Assembly instruction



STEP 9

Connect the two (G) plates using washers (2), bolts (8), and a wrench (3). Ensure the sides of the (G) plates with lugs face the same direction. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

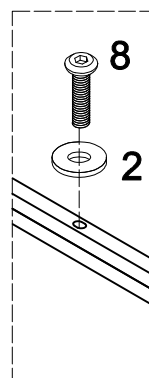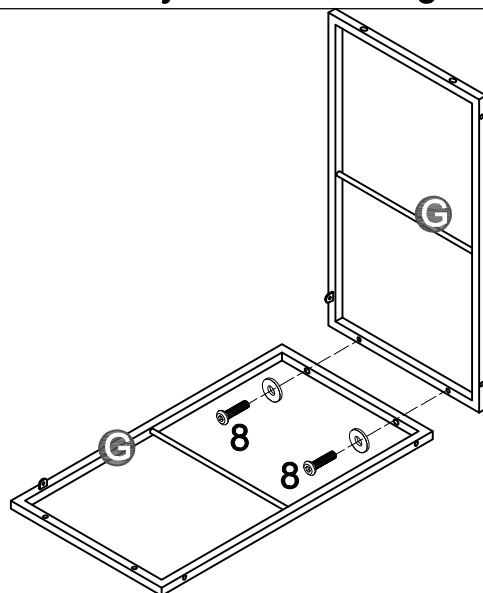

STEP 10



Connect the (G) plate(s) using washers (2), bolts (8), and a wrench (3). Ensure the sides of the (G) plate(s) with lugs face the same direction. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

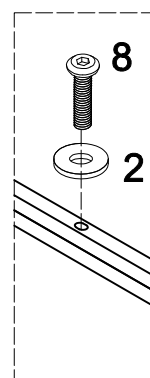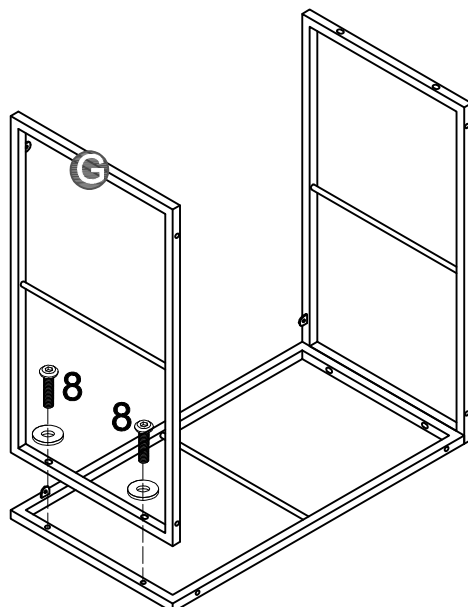

Assembly instruction



STEP 11

Connect the (G) plate(s) using washers (2), bolts (8), and a wrench (3). Make sure the sides of the (G) plate(s) with lugs are oriented in the same direction. Do not fully tighten the bolts until all bolts have been inserted into the correct holes. This will enable you to make minor position adjustments during the assembly process.

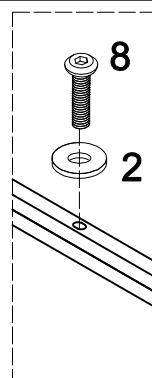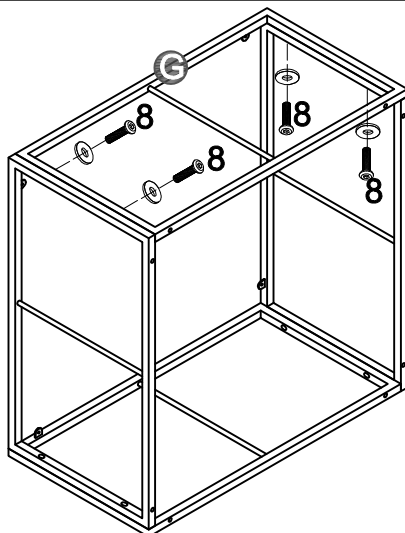

STEP 12



Use bolts (1) and a wrench (11) to connect the plastic feet (E) (F) to the coffee table. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

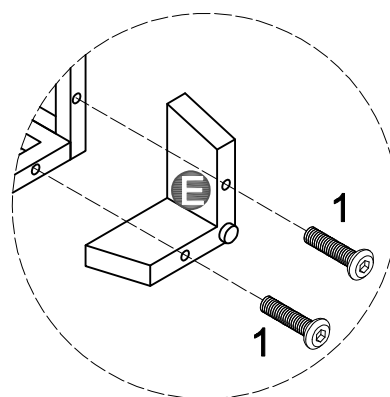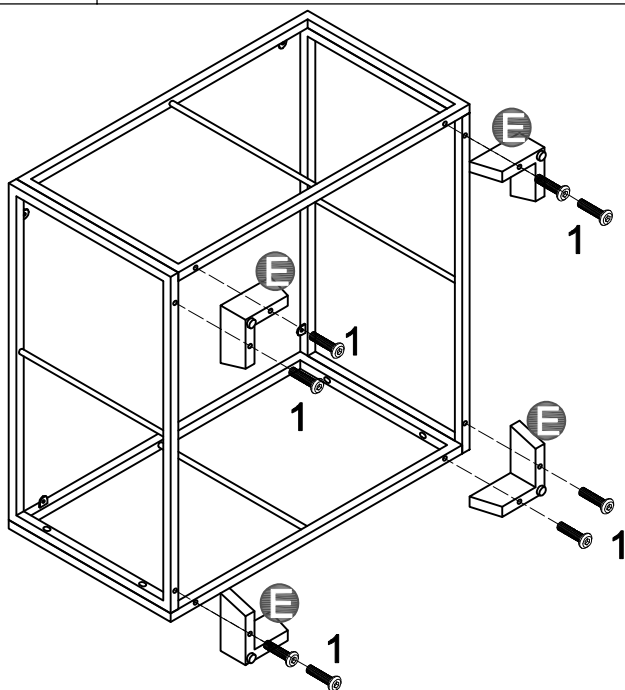

Assembly instruction




STEP 13

Insert the suction cups (9) into the holes of the metal parts inside the coffee table, then place the glass (H) [on the suction cups].

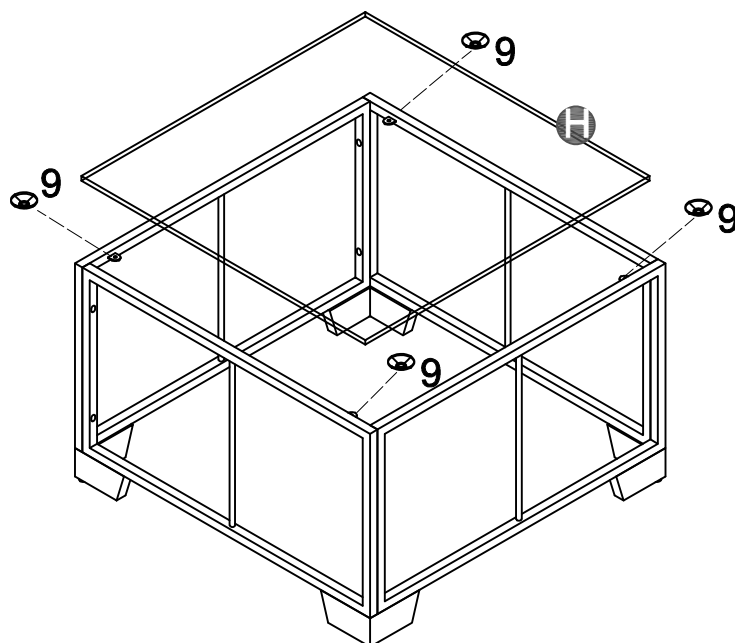

STEP 14



Use bolts (1), washers (2), nuts (5), and wrenches (3) (6) to connect the seat board (I) to the back panel (Q). Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

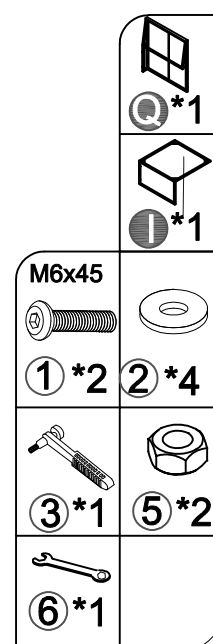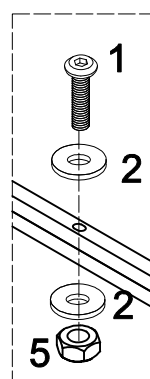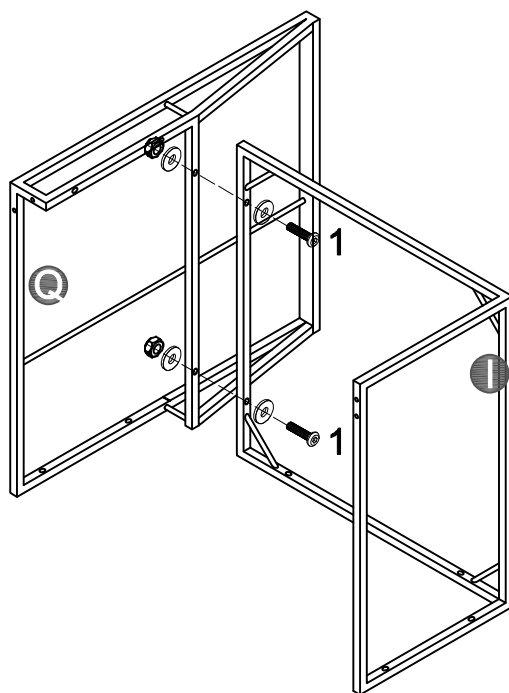

Assembly instruction

STEP 15


Use bolts (1) (4), washers (2), nuts (5), and wrenches (3) (6) to connect the side panels (D) to the seat board (I) and back panel (Q). Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

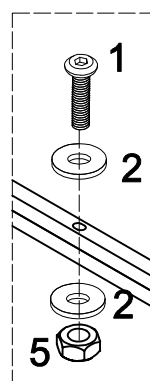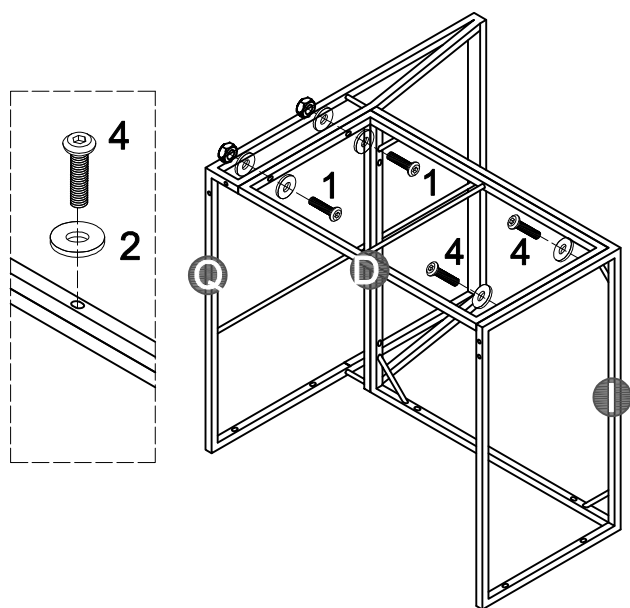

 D *1	
 3 *1	 2 *6
M6x30  4 *2	M6x45  1 *2
 6 *1	 5 *2

STEP 16

Insert bolt (7) into the upper right end of the back panel (Q). Tighten the bolt approximately 1 cm.



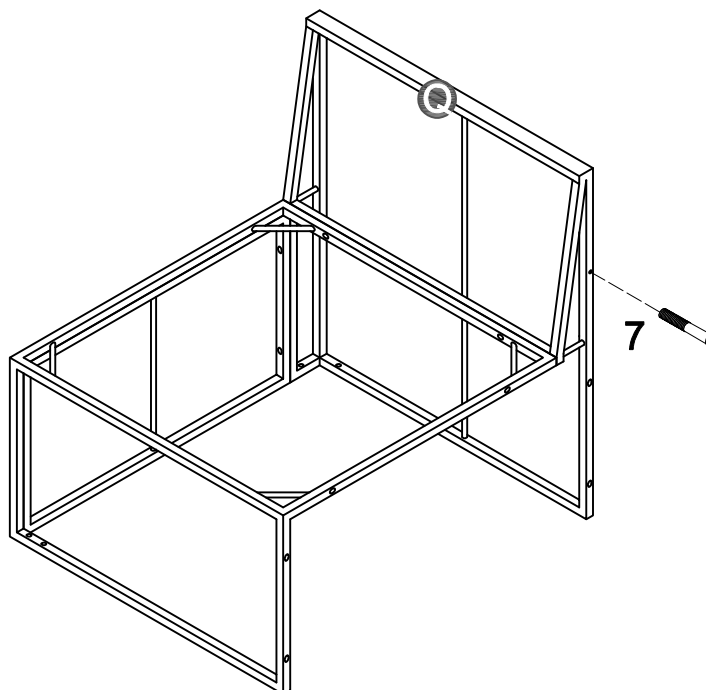


M6x35  7 *1
--

Assembly instruction



STEP 17

Use only bolts (1), washers (2), nuts (5), and wrenches (3) (6) to connect the armrests (K) to the chair frame. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

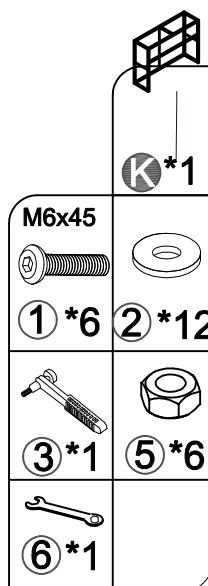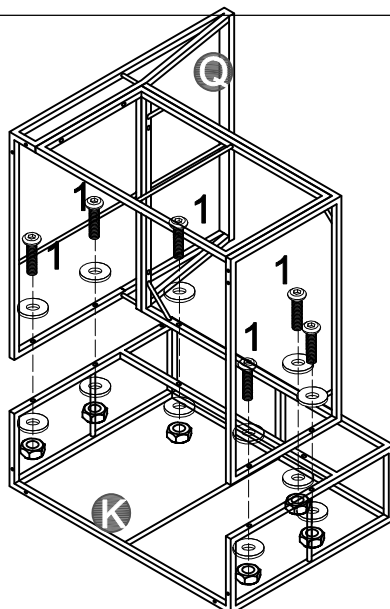

STEP 18


Use bolt (1) and wrench (11) to connect the plastic feet (E) (F) to the sofa. Do not fully tighten the bolts until all bolts have been installed in the correct holes. This will allow for minor position adjustments during the assembly process.

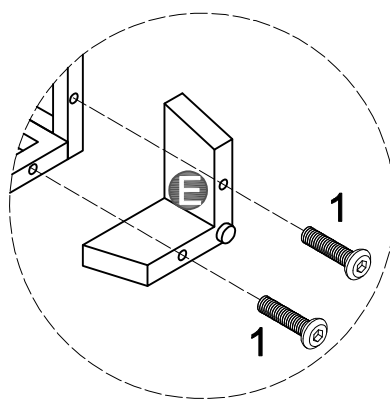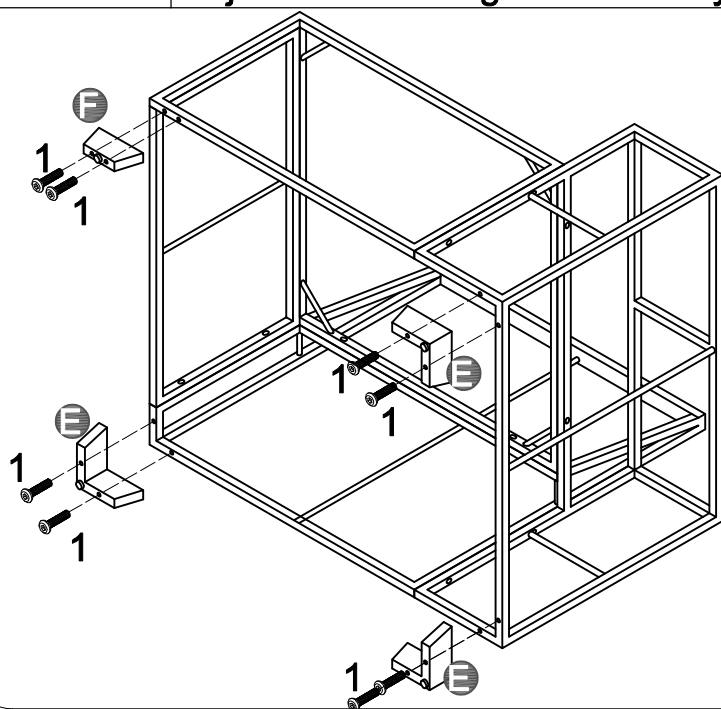

Assembly instruction

STEP 19

Connect the two sofas using the clips (10). Align the two sofas front to back, then snap them into place.

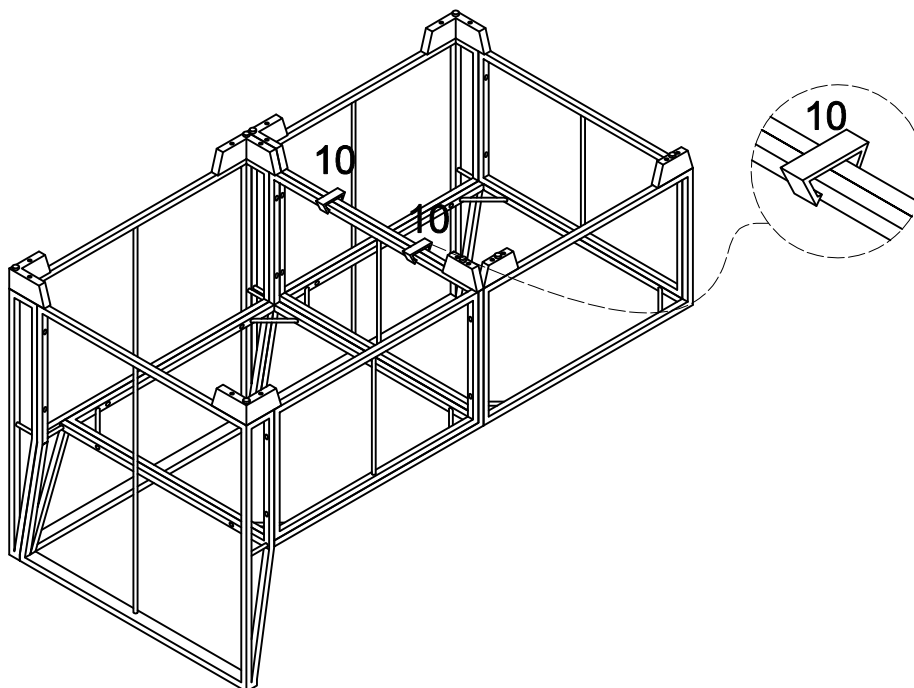

STEP 20

Place the seat cushion (O) and back cushion (N) on the assembled product. Insert the end of the seat cushion (O) with the zipper opening toward the back panel (Q). Insert the end of the back cushion (N) with the zipper opening toward the seat cushion (O).

