

INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Install (1) one medium base bulb (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
4. Loosen hex nut (H) and socket cup (I), then tilt glass shade (M) though bulb (L) and hang glass shade (M) on the holder (K).
5. Place socket cup (I) over all thread (J) and secure with hex nut (H) (not over tighten) .
6. Screw decorative assembly (G) onto all thread (J) on top of fixture body.
7. Determine the desired hanging height and thread rods (F1, F2 and F3) to the all thread of decorative assembly (G). Attach canopy (D) by screwing onto rod (F1). Carefully pass the wires through each rod during assembly.
8. Thread screws (A) into the pre-drilled holes in circular strap (B) spaced the same distance apart as the holes in the canopy (D).
9. Attach circular strap (B) to the junction box (not included) with mounting screws (C) (Size: #8-32N*L0.5"). The side of the circular strap (B) with "GND" marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

10. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (B) using the green screw provided.
11. Tuck the wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

12. Slide canopy (D) over screws (A) and secure with knobs (E).


Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-020

- Circular Strap
- Ground Screw
- Mounting Screw*2

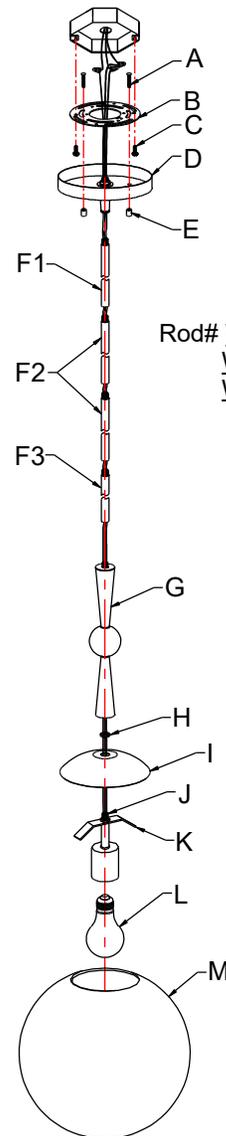

Rod# W30-1-923*1(F1)
W30-1-923*2(F2)
W30-H-923*1(F3)

Fig. 2

FIXTURE WIRES
Black or Smooth



HOUSE WIRES
Black
(Hot)

FIXTURE WIRES
White or Ribbed



HOUSE WIRES
White
(Neutral)

FIXTURE WIRES
Bare Copper
(Ground)



HOUSE WIRES
Green
(Ground)