




97172 Product Installation Instructions

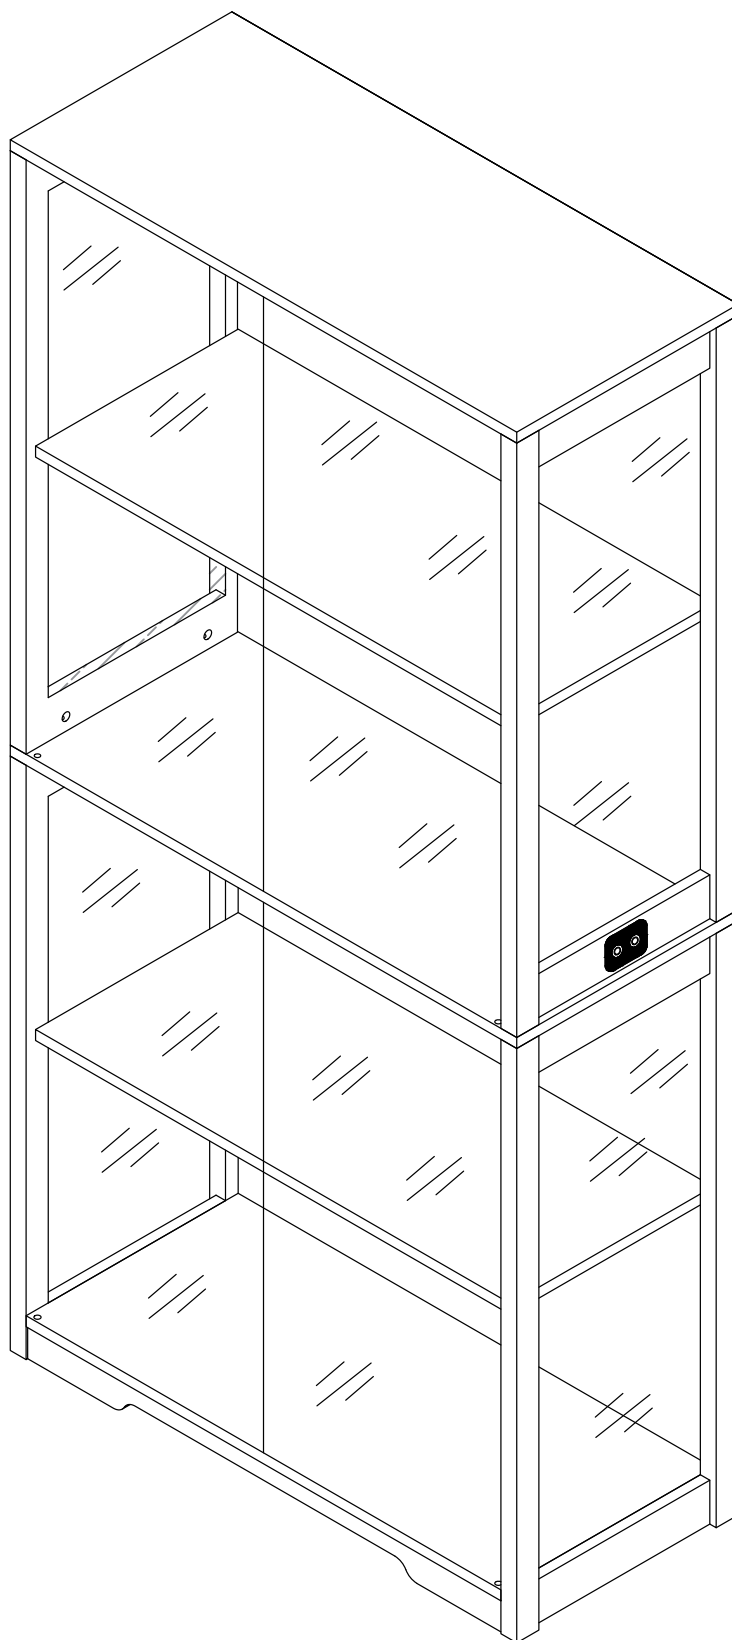


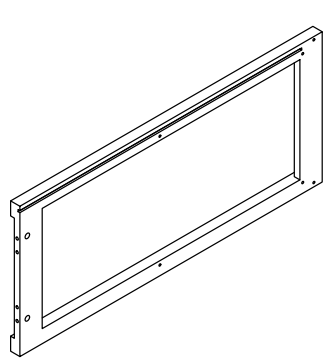


Ax1




Bx1

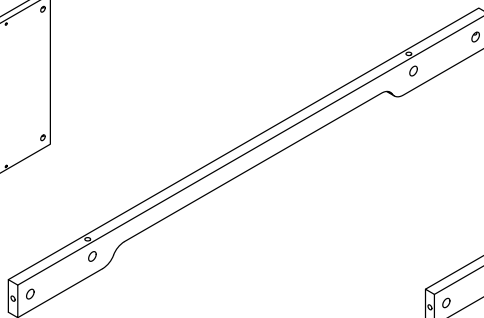


Cx1

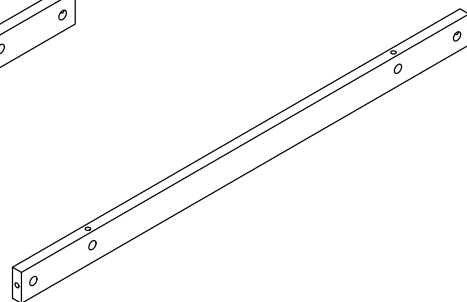


Dx1




Ex2




Fx1




Gx1

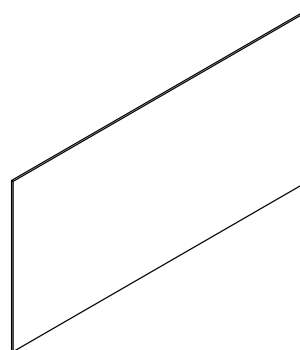


Hx1

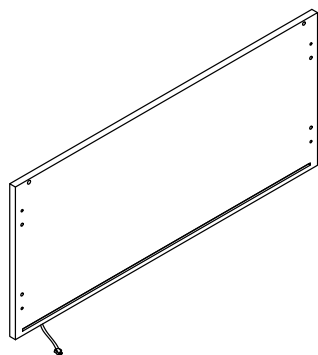


Ix1



Jx1




Kx1

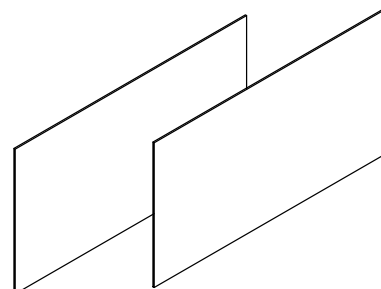


Lx1


Mx1

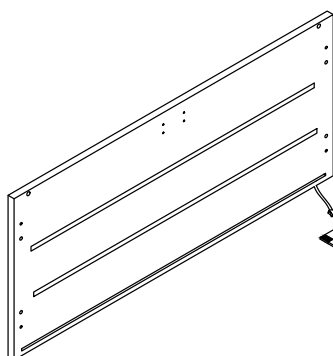


Nx1

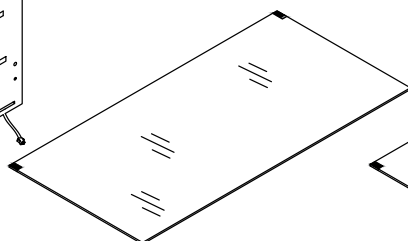


Ox2

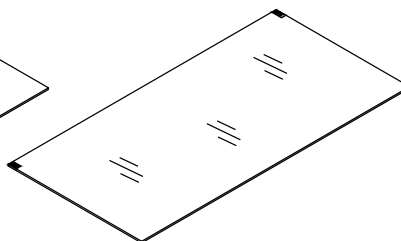

Px2















Qx2











1


Accessories list

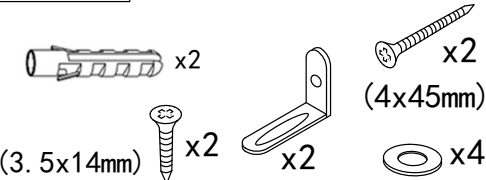①		Two in one screw (6x28mm)	24pcs +4pcs
②		Two in one nut (10x12mm)	24pcs +4pcs
③		Wood chipping (6x30mm)	12pcs +4pcs
④		Non-slip pads (50x2mm)	6pcs +2pcs
⑤		Rebound device & Screw (3x16mm)	8pcs +2pcs
		Iron sheet	4pcs
⑥		Screw (5x40mm)	8pcs +1pcs
⑦		Wire clamp	2pcs +2pcs
⑧		Fixing clip & screw (3x16mm)	12pcs +4pcs
⑨		Laminate Support Nail	8pcs +2pcs
⑩		Hinge	8pcs
		AC/DC Adapter (12V=3.0A)	1pcs
⑪	Anti Fall Hardware 	Double-head screwdriver, use as required 	

Product structure decomposition

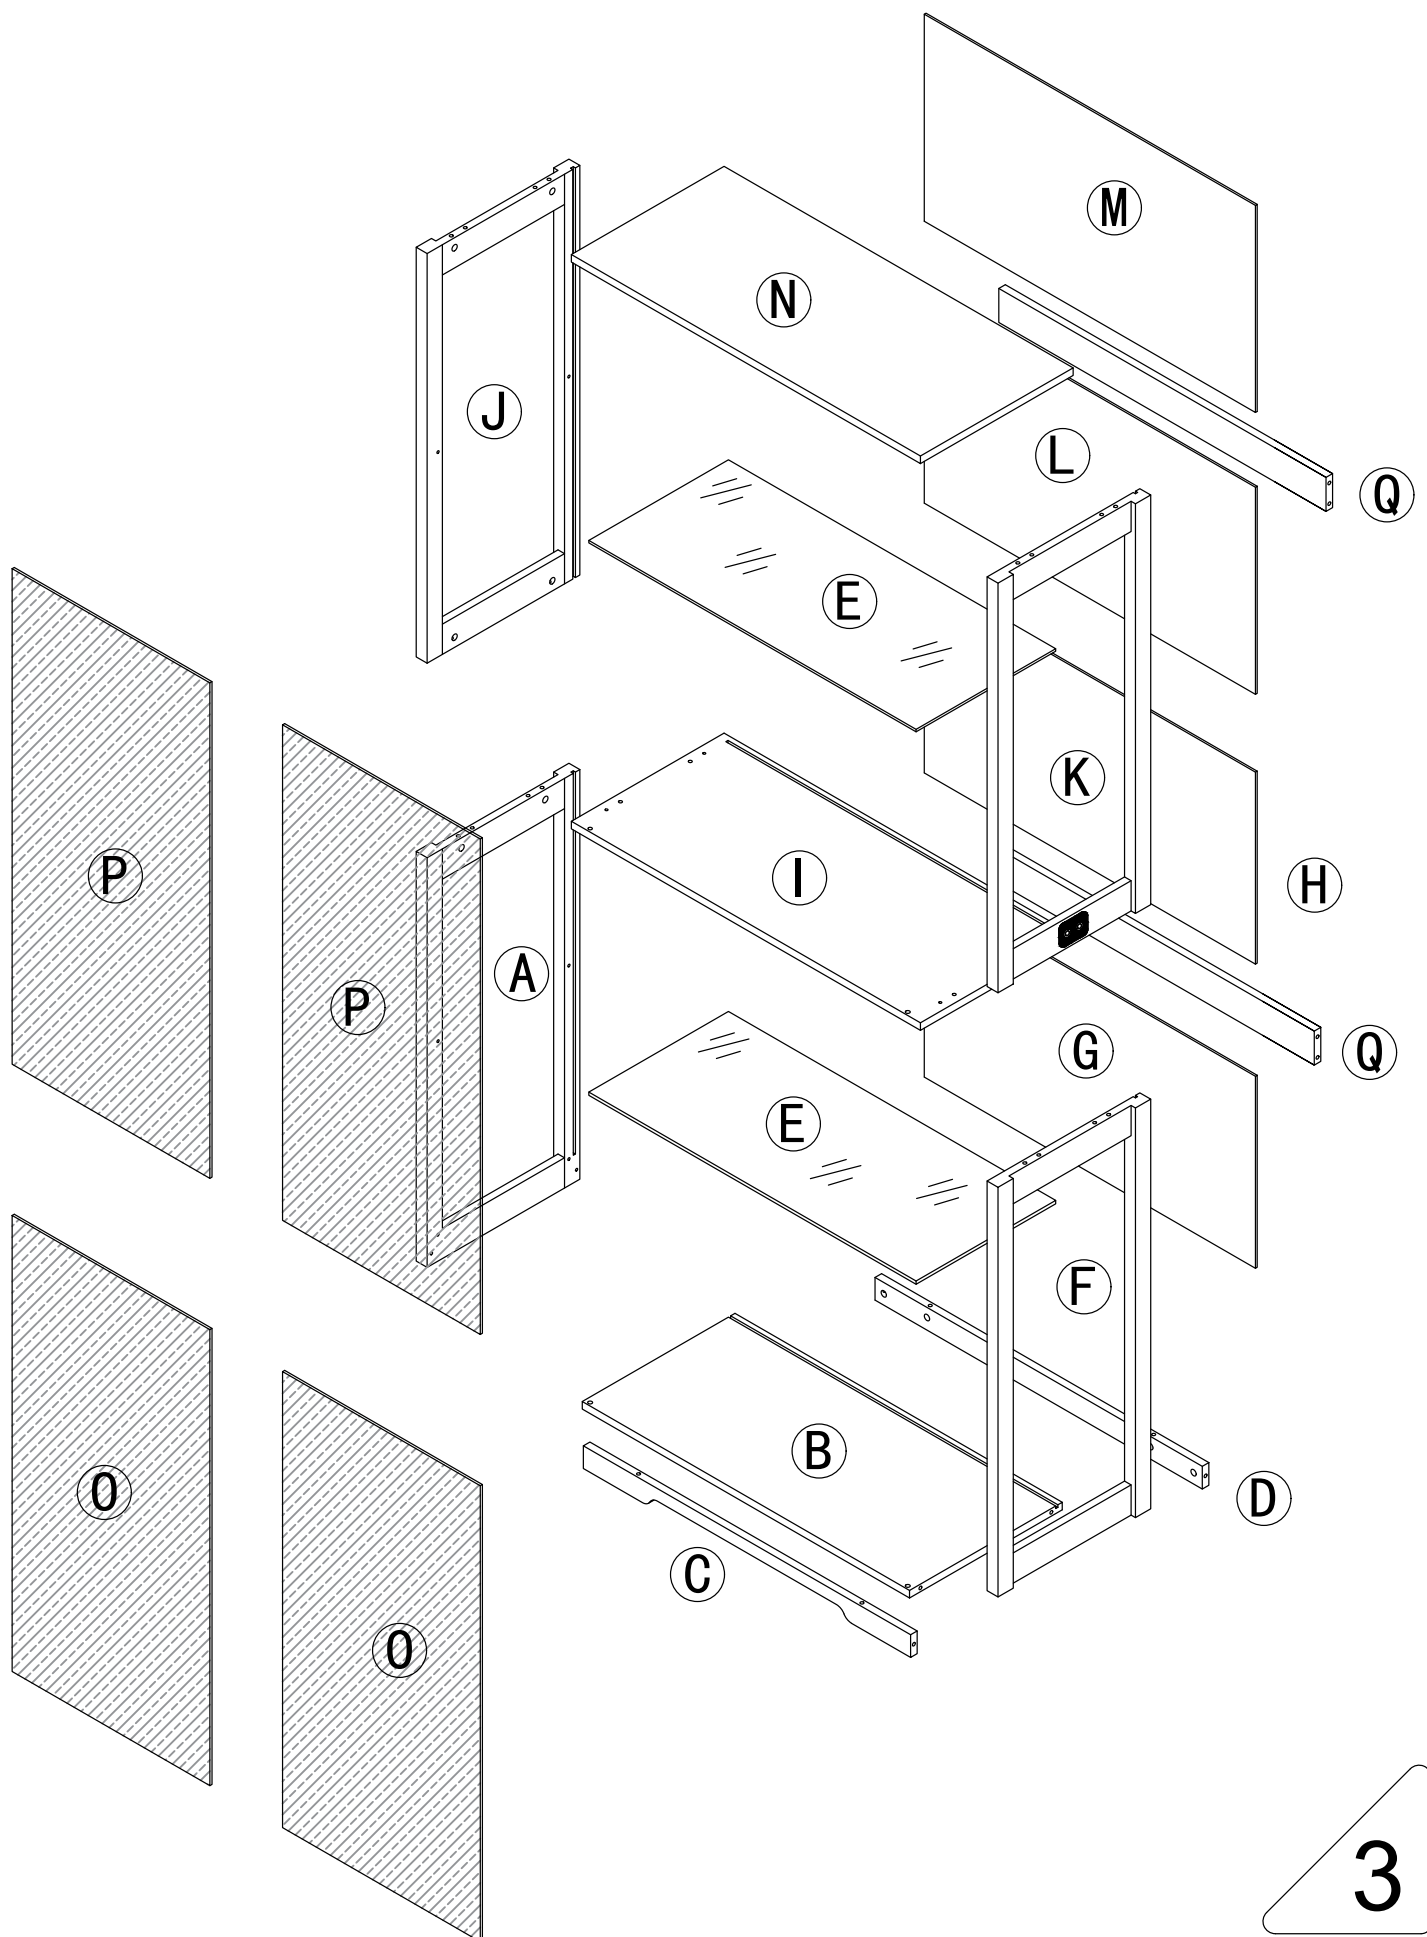


1		32pcs	4		6pcs	7		2pcs
2		32pcs	5		2pcs	8		8pcs
3		12pcs	6		8pcs	9		8pcs

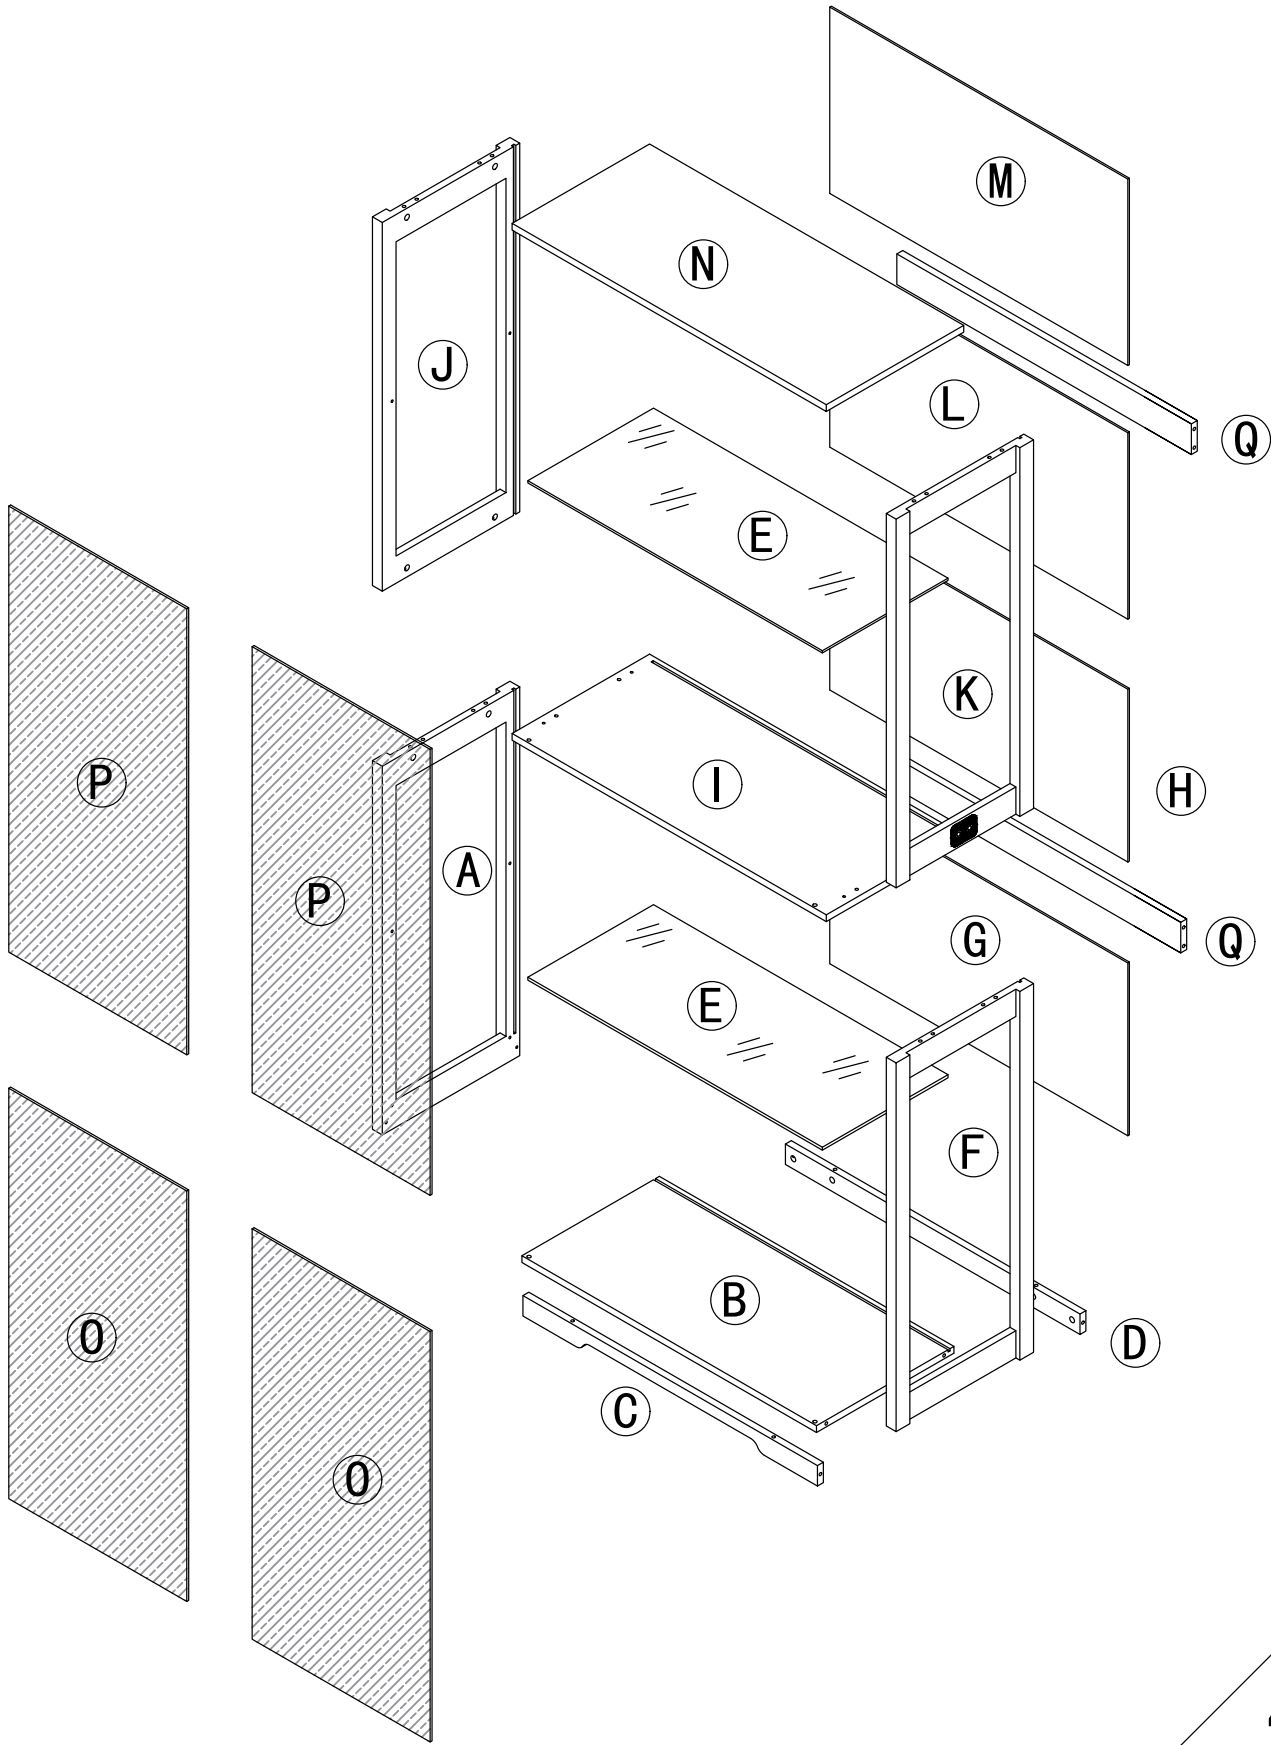


Use parts ① and ②



Step1

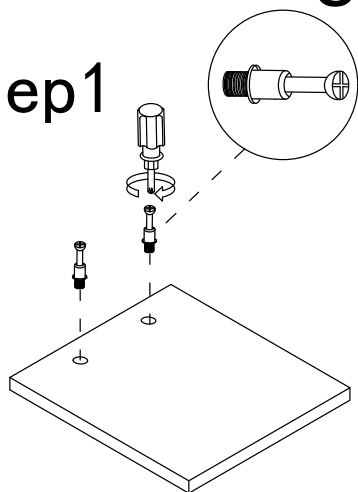


Step2

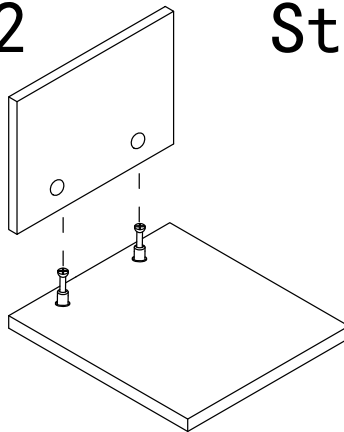

Step3

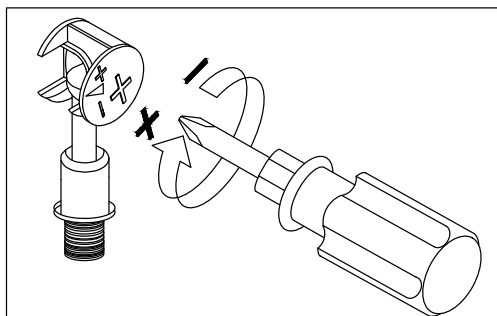
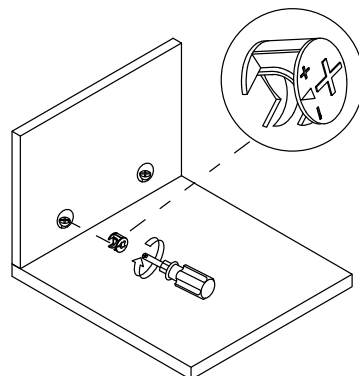


Use a screwdriver to lock in the direction of the "+" sign


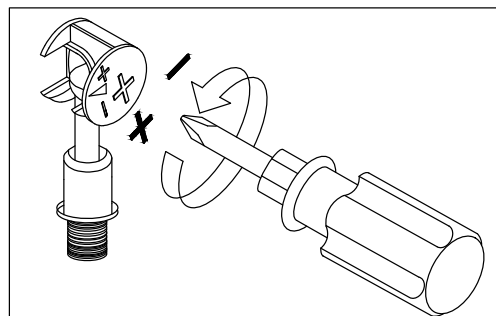


Disassemble along the direction of "-" sign



Step 1

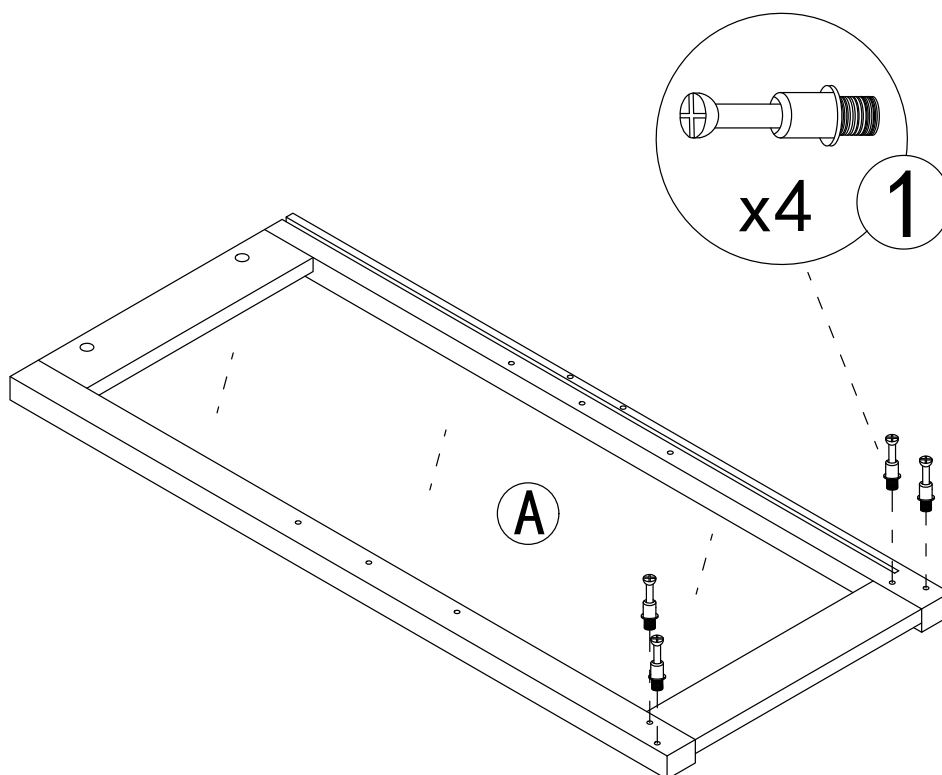

Step 2

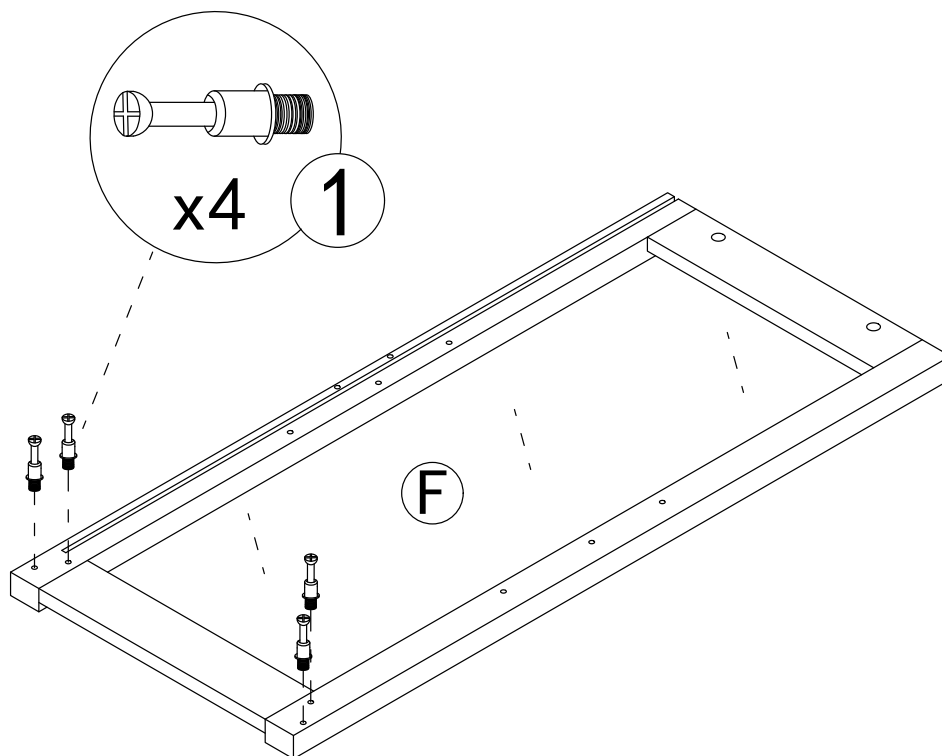

Step 3

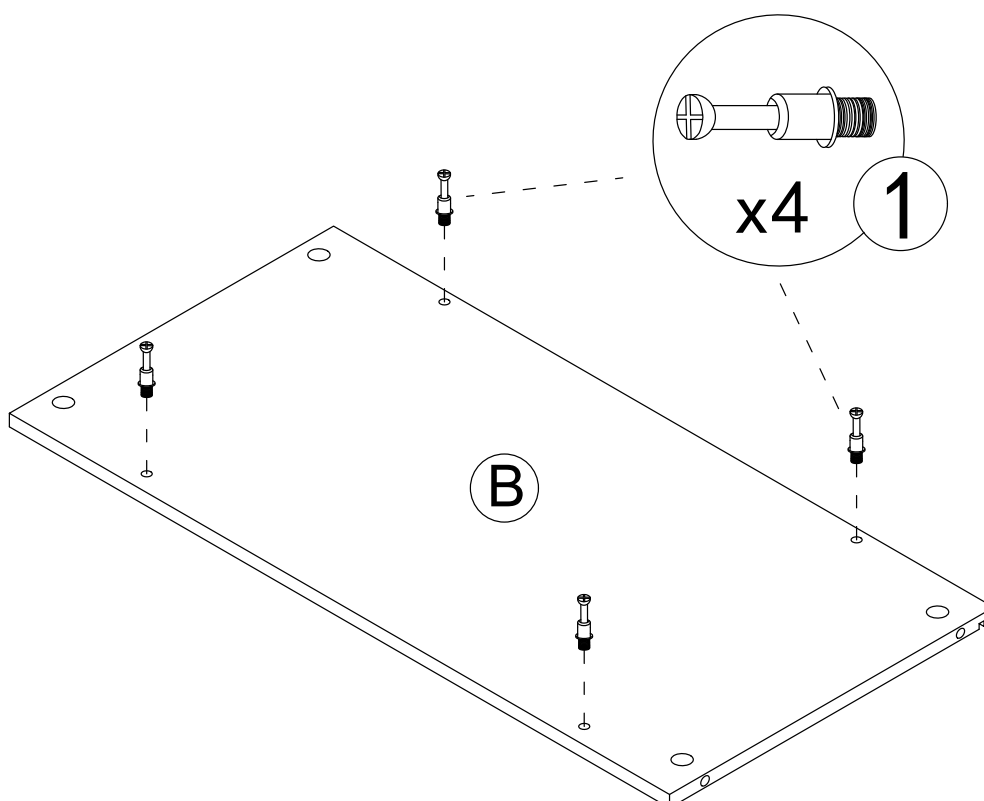


Step 4

2



x4

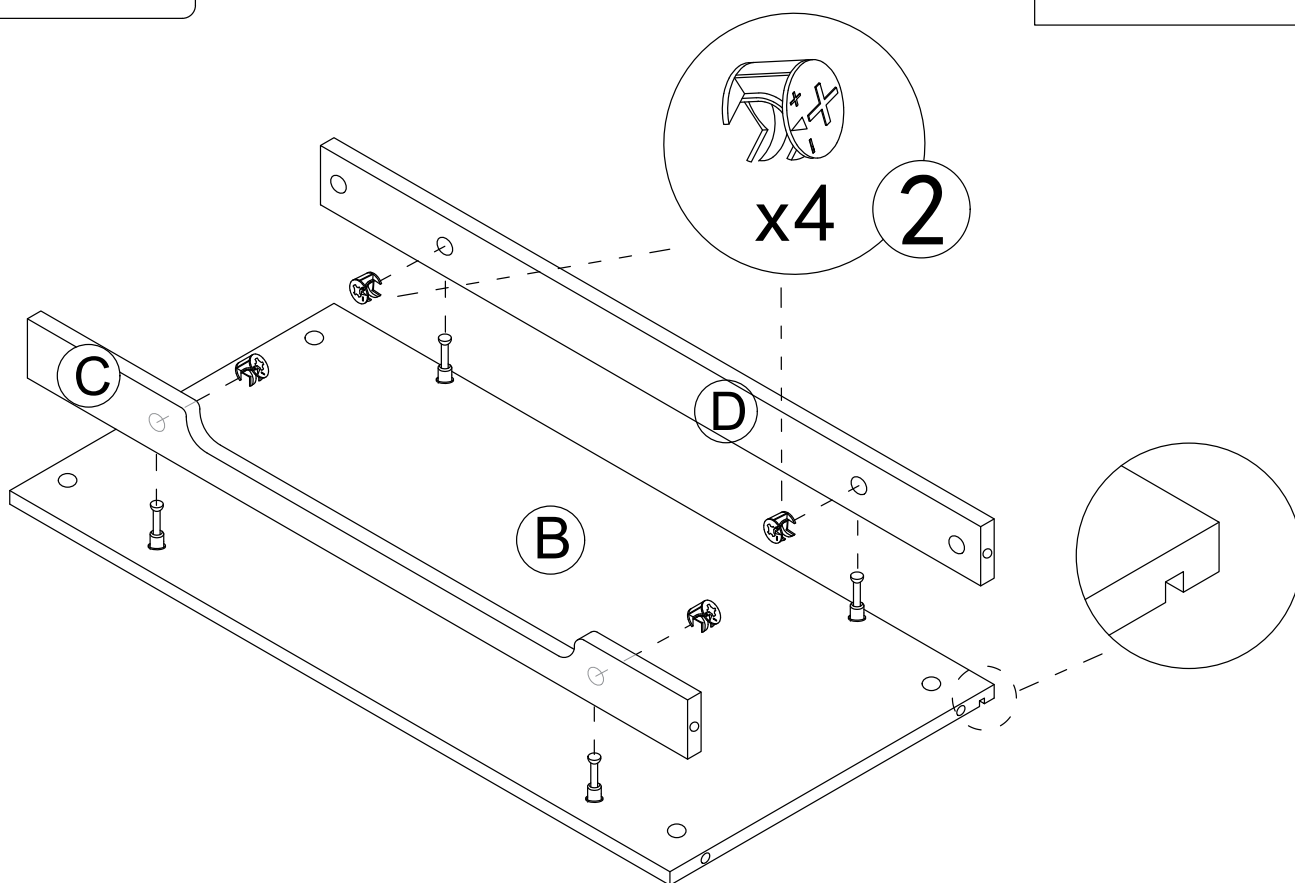


Step 5

2




x4

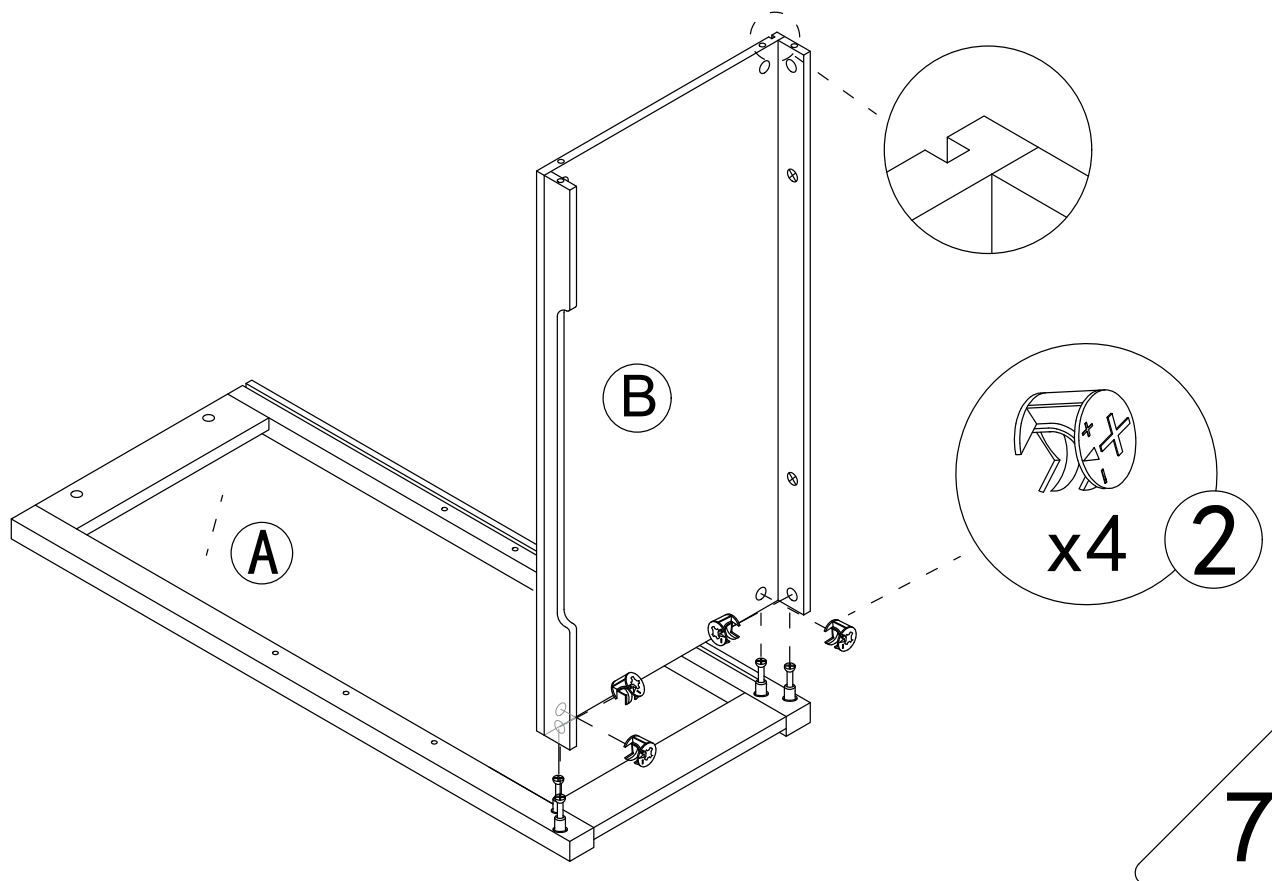

7

Step 6

Set down gently

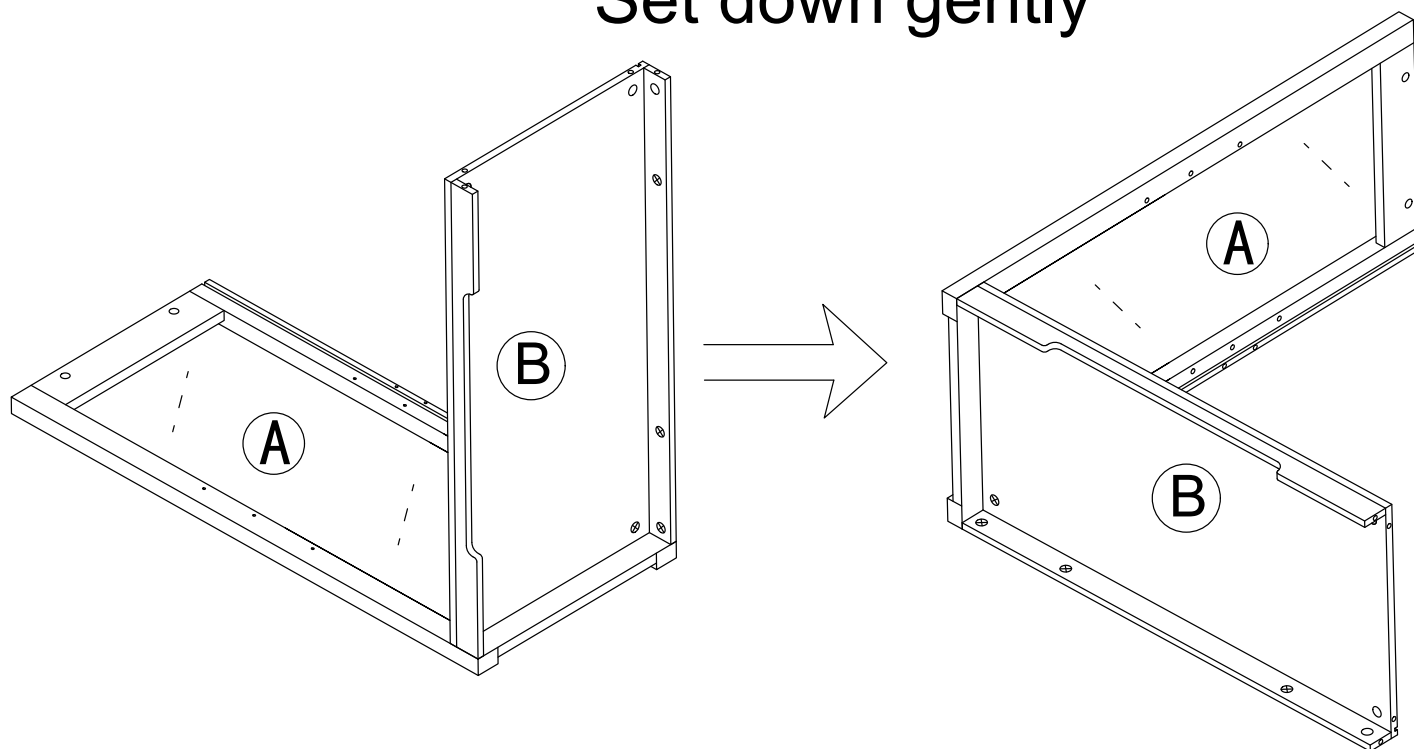


Step 7

2




x4

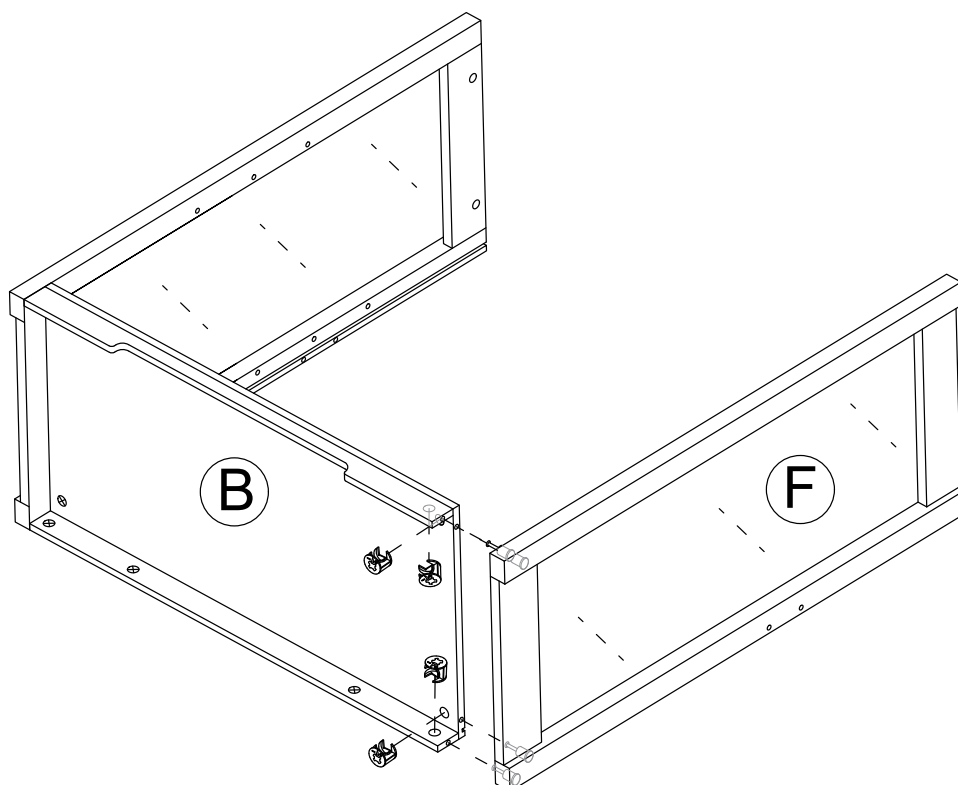

8

Step 8

4



x6

Tear off release paper and stick the black foot pad on the board

A

B

F



x6

4

Stand upright

A


B

F


9

Step 9




6




x4

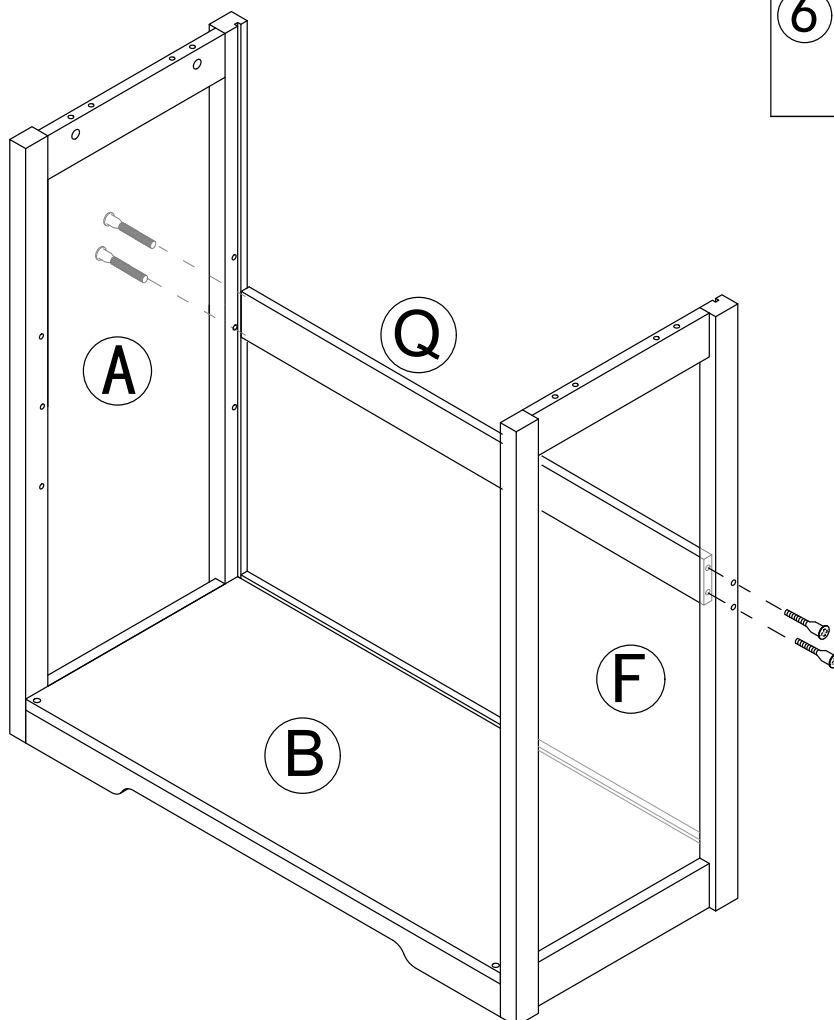

Insert the backplane into the slot

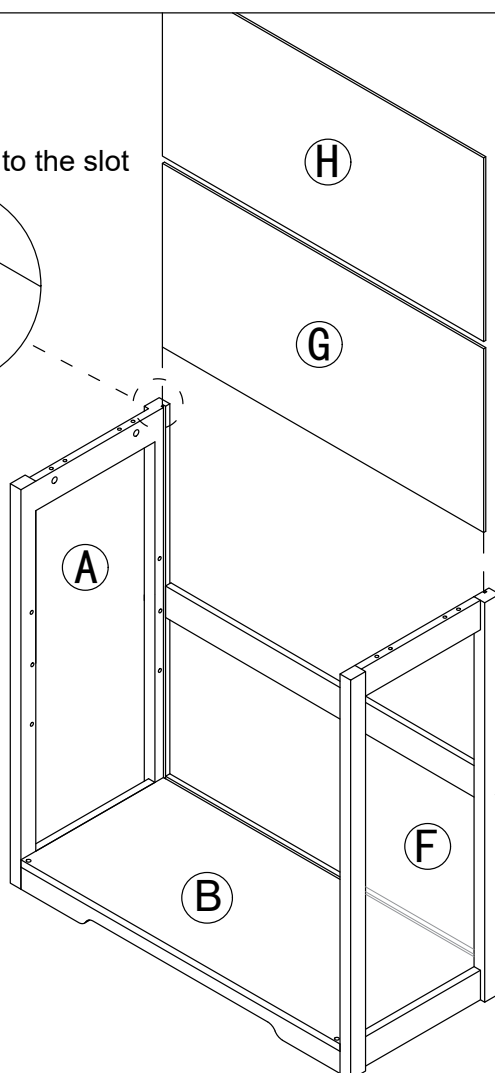


Gx1




Hx1

10

Step 10



Step 11




Step 12



2



x4

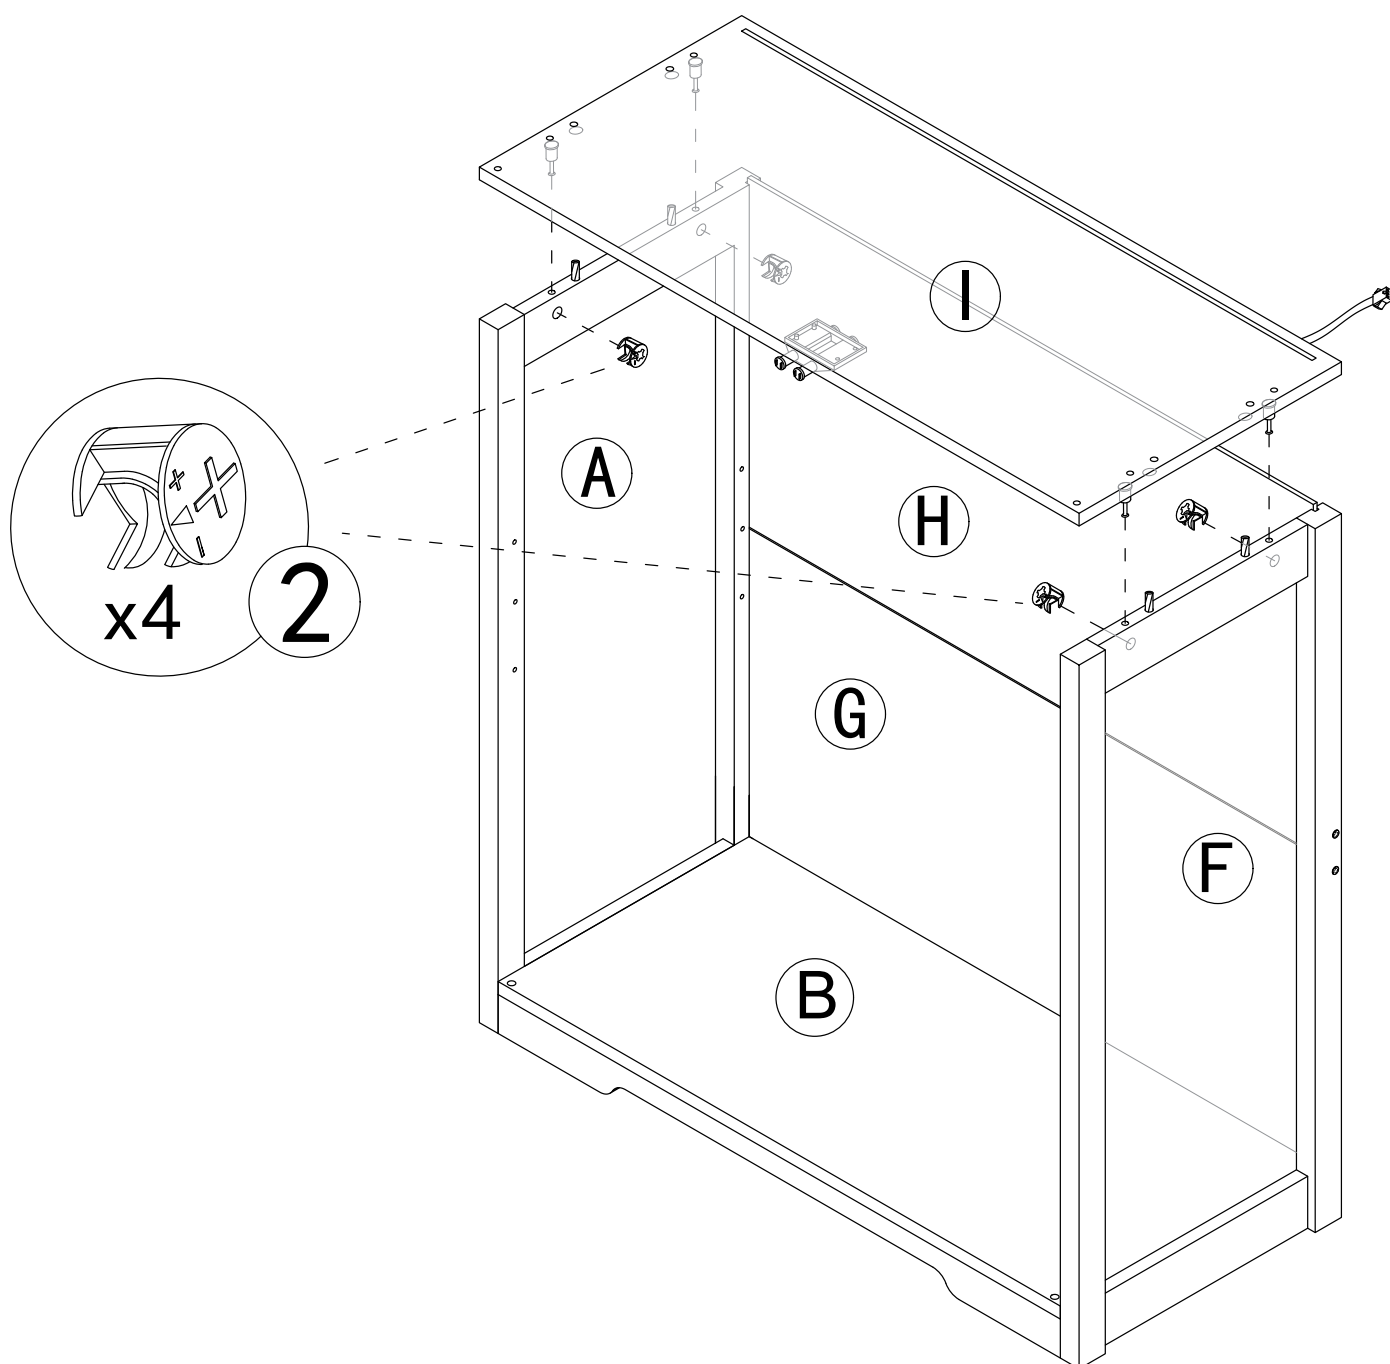

Step 13

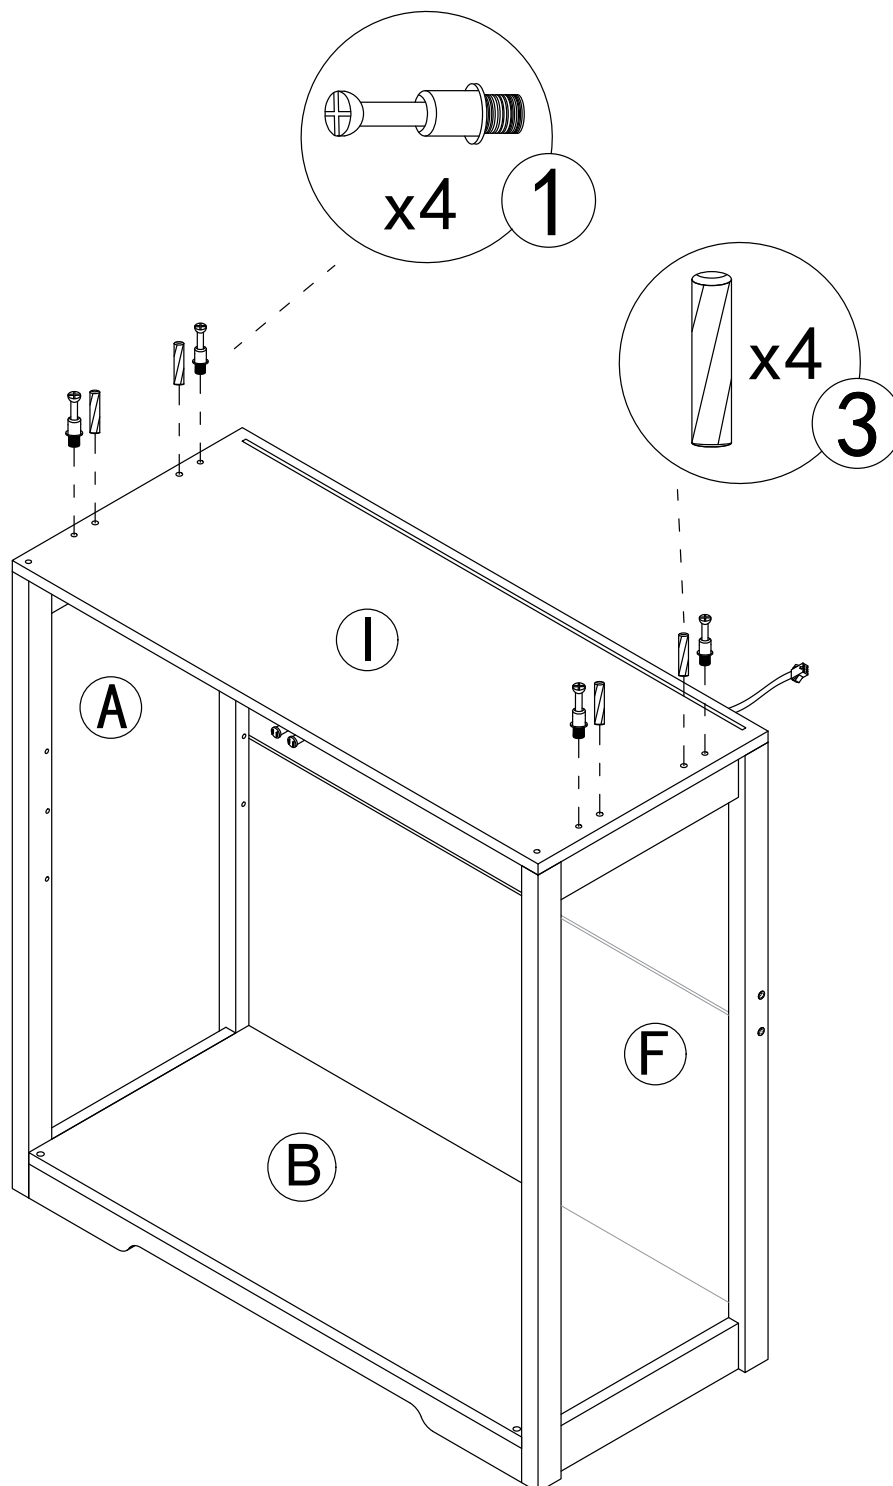


Step 18

2



x2

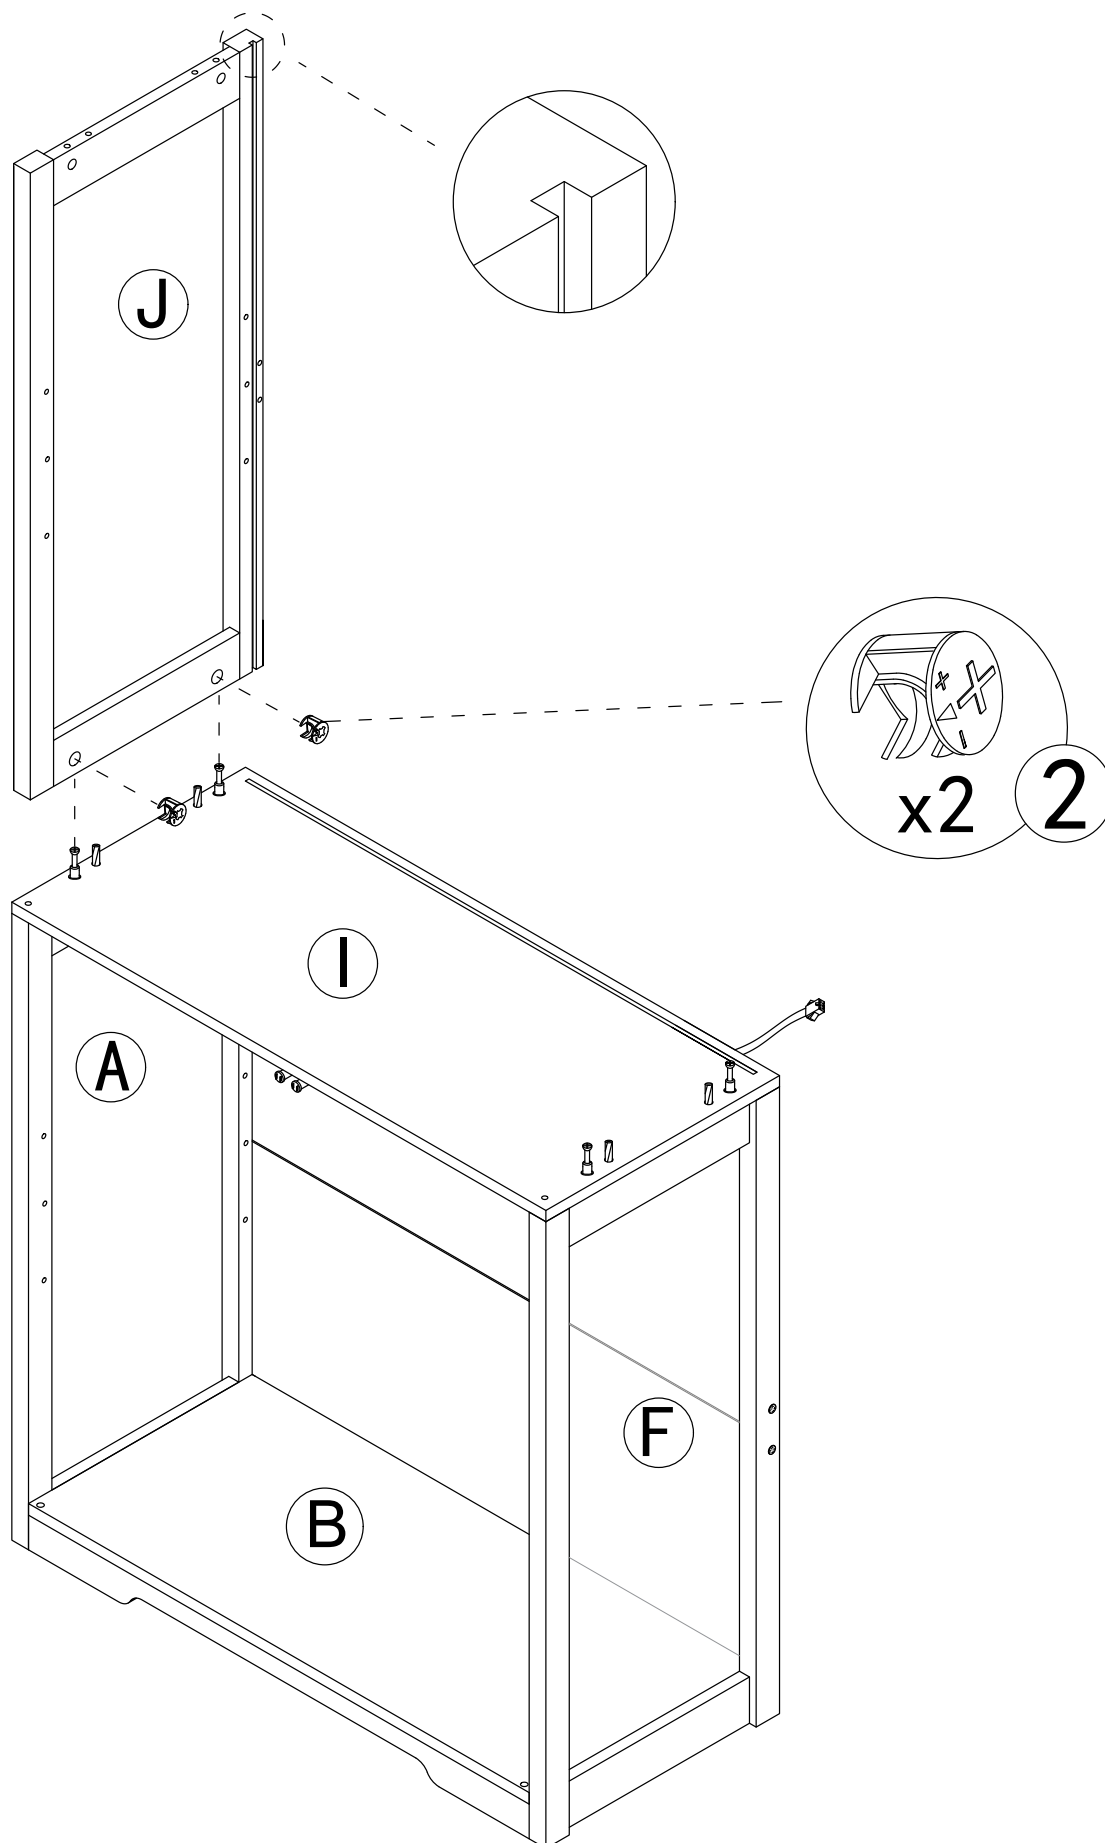


Step 18


2




x4

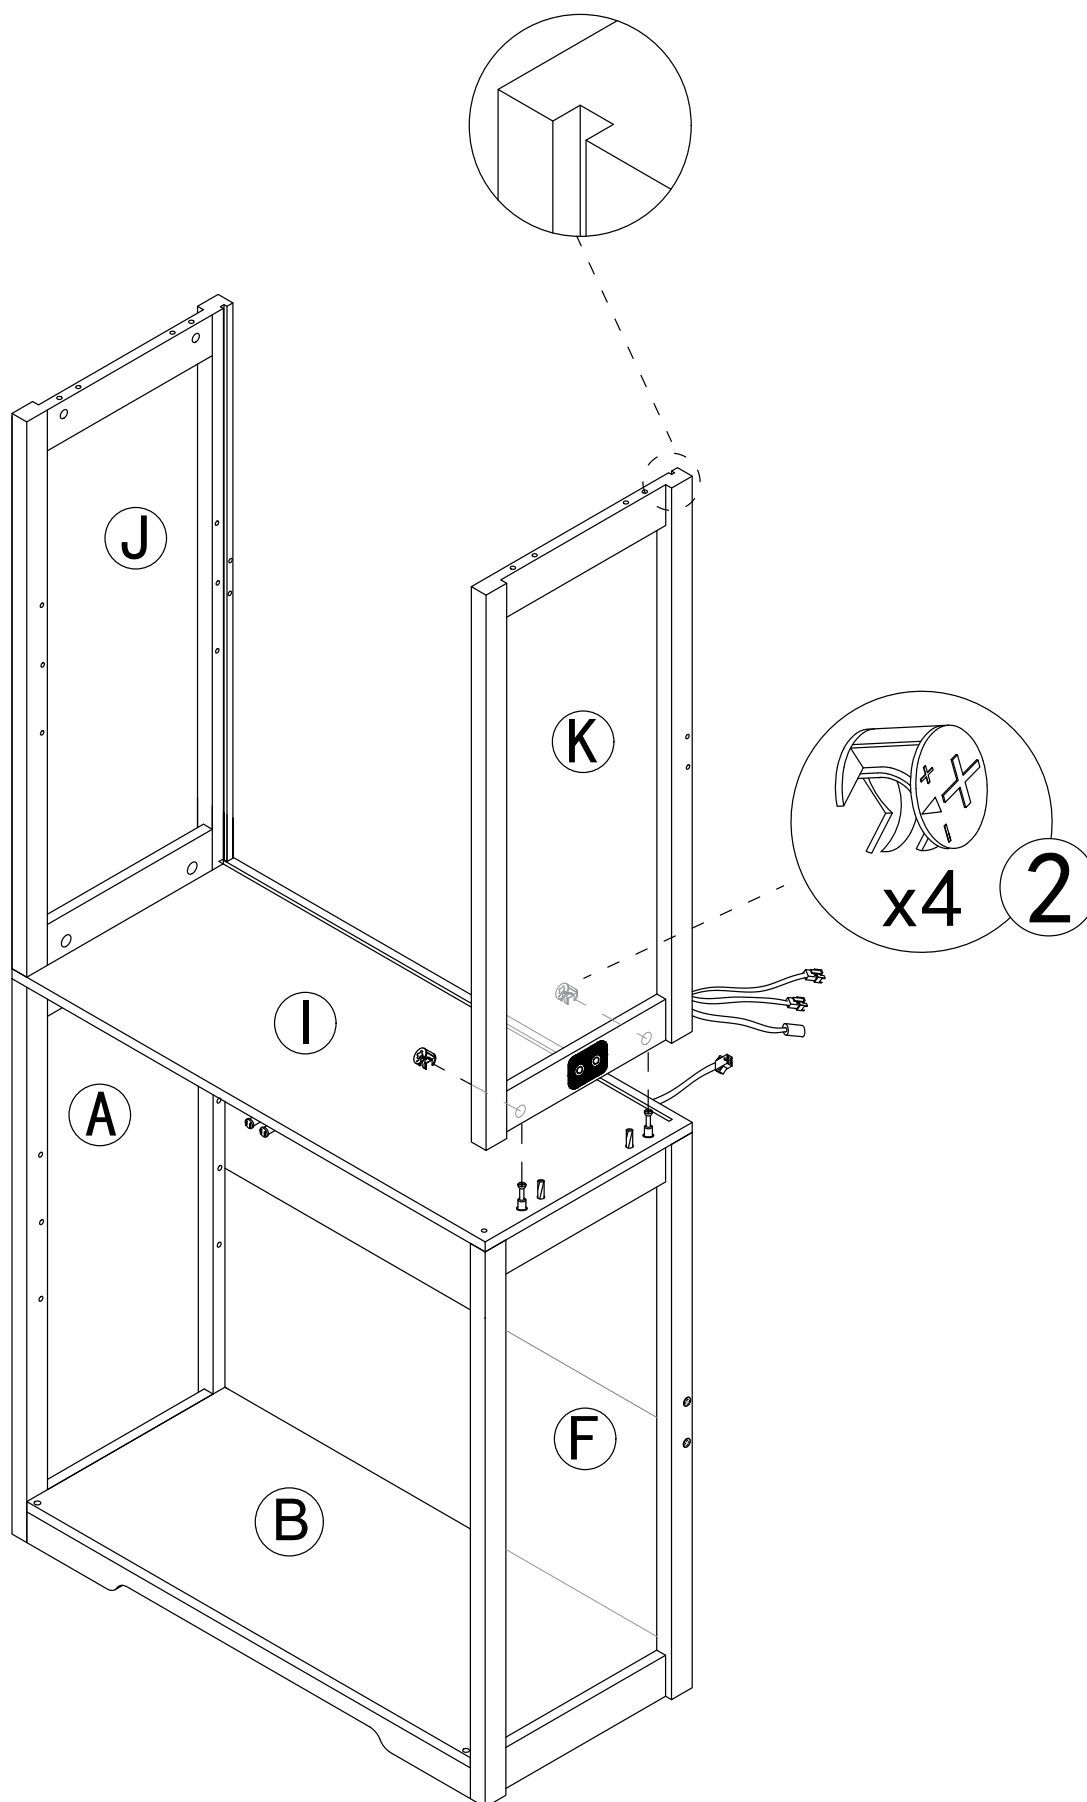


Step 19

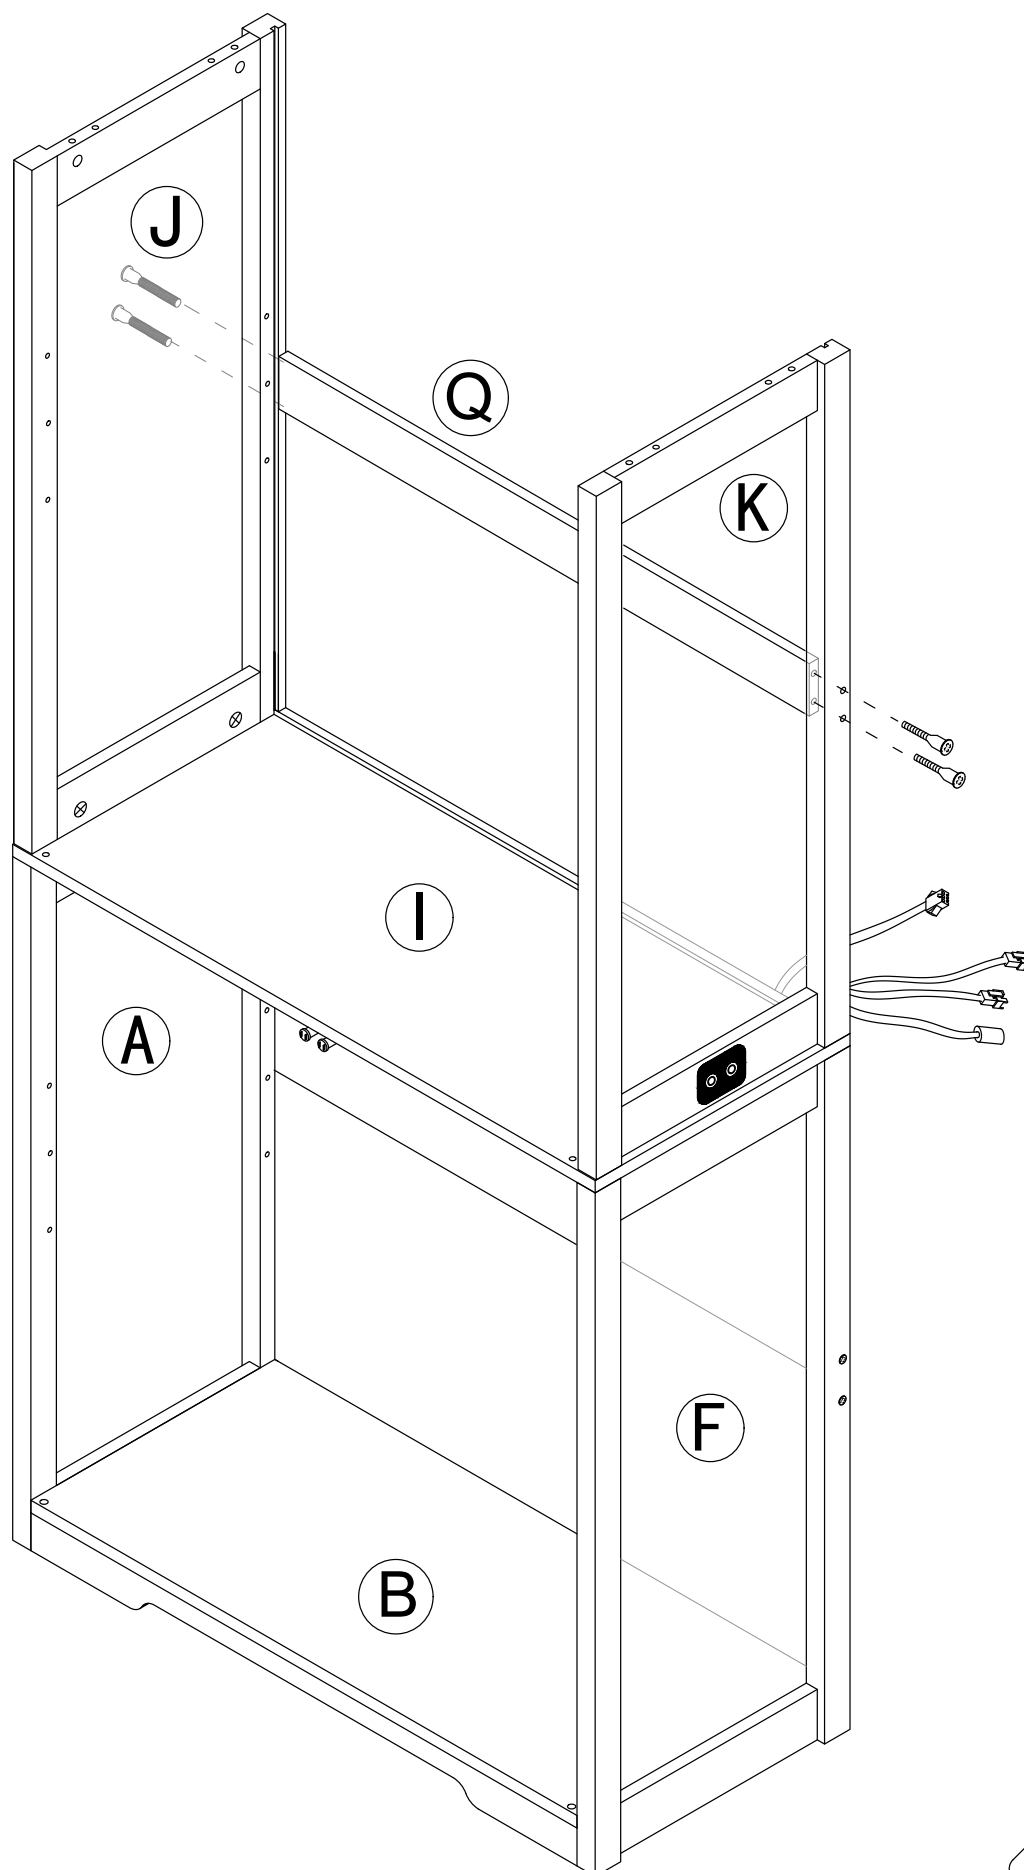

Step 19





Lx1




Mx1


Insert the backplane into the slot

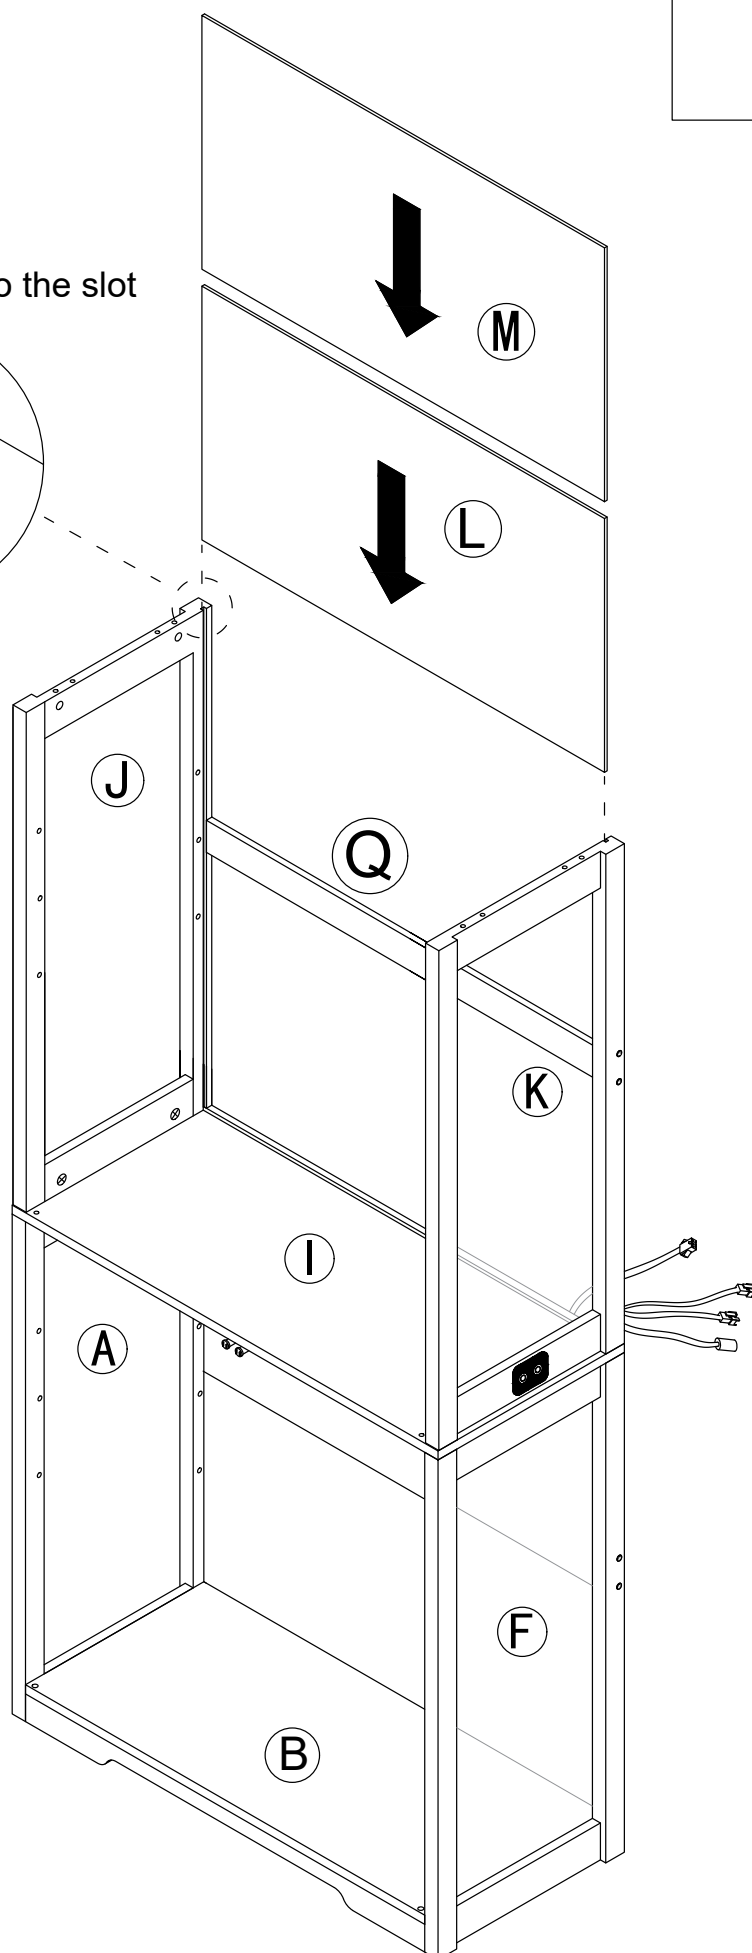

Step 20

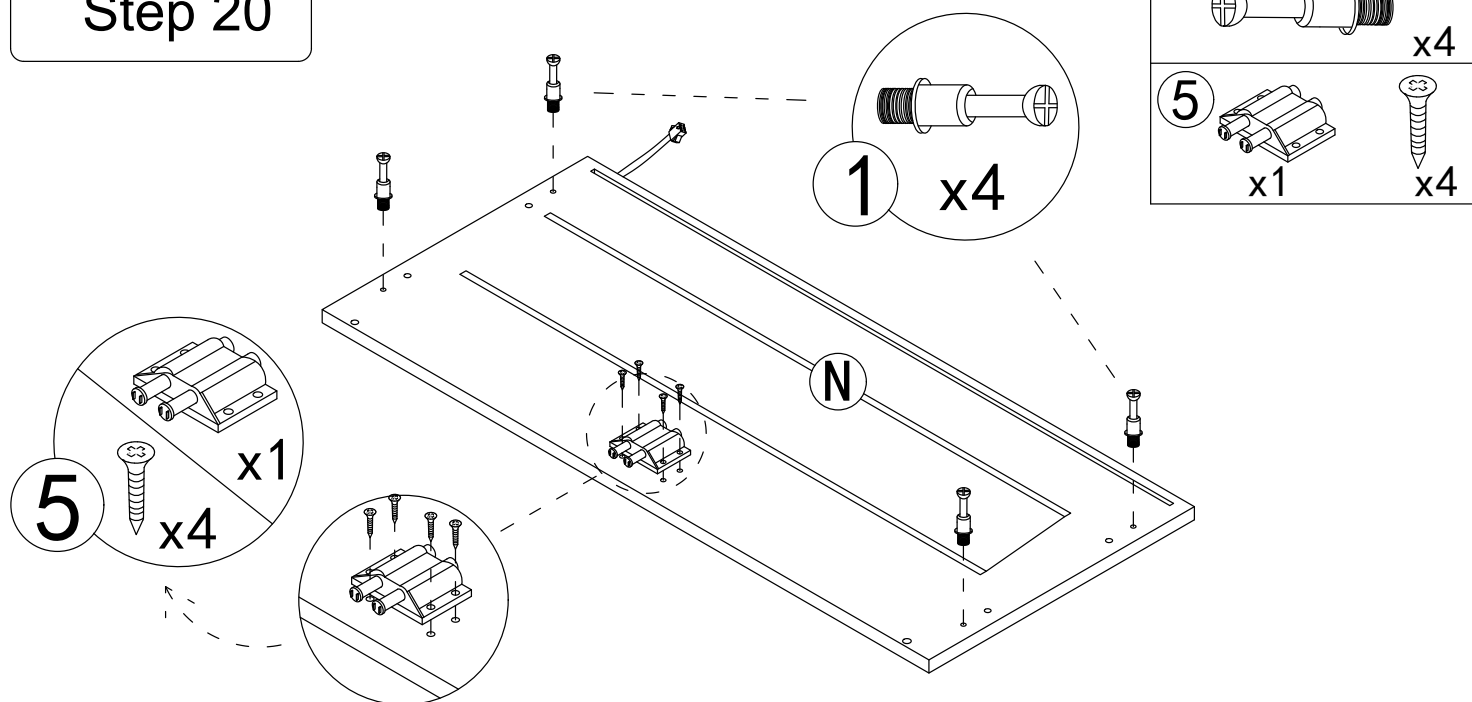

Step 21

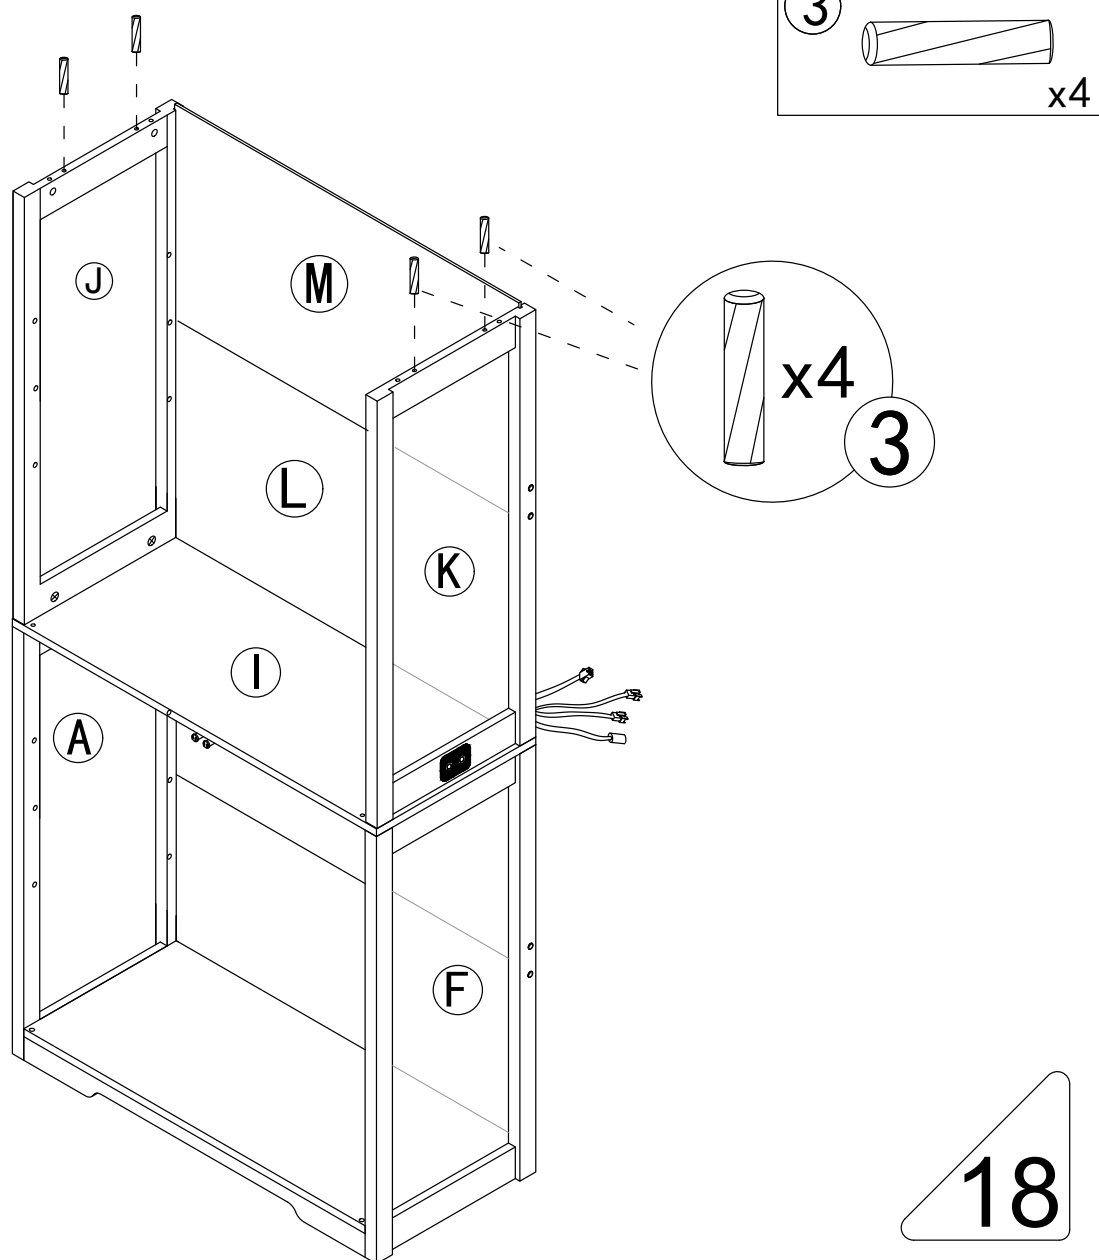


Step 22


2





x4

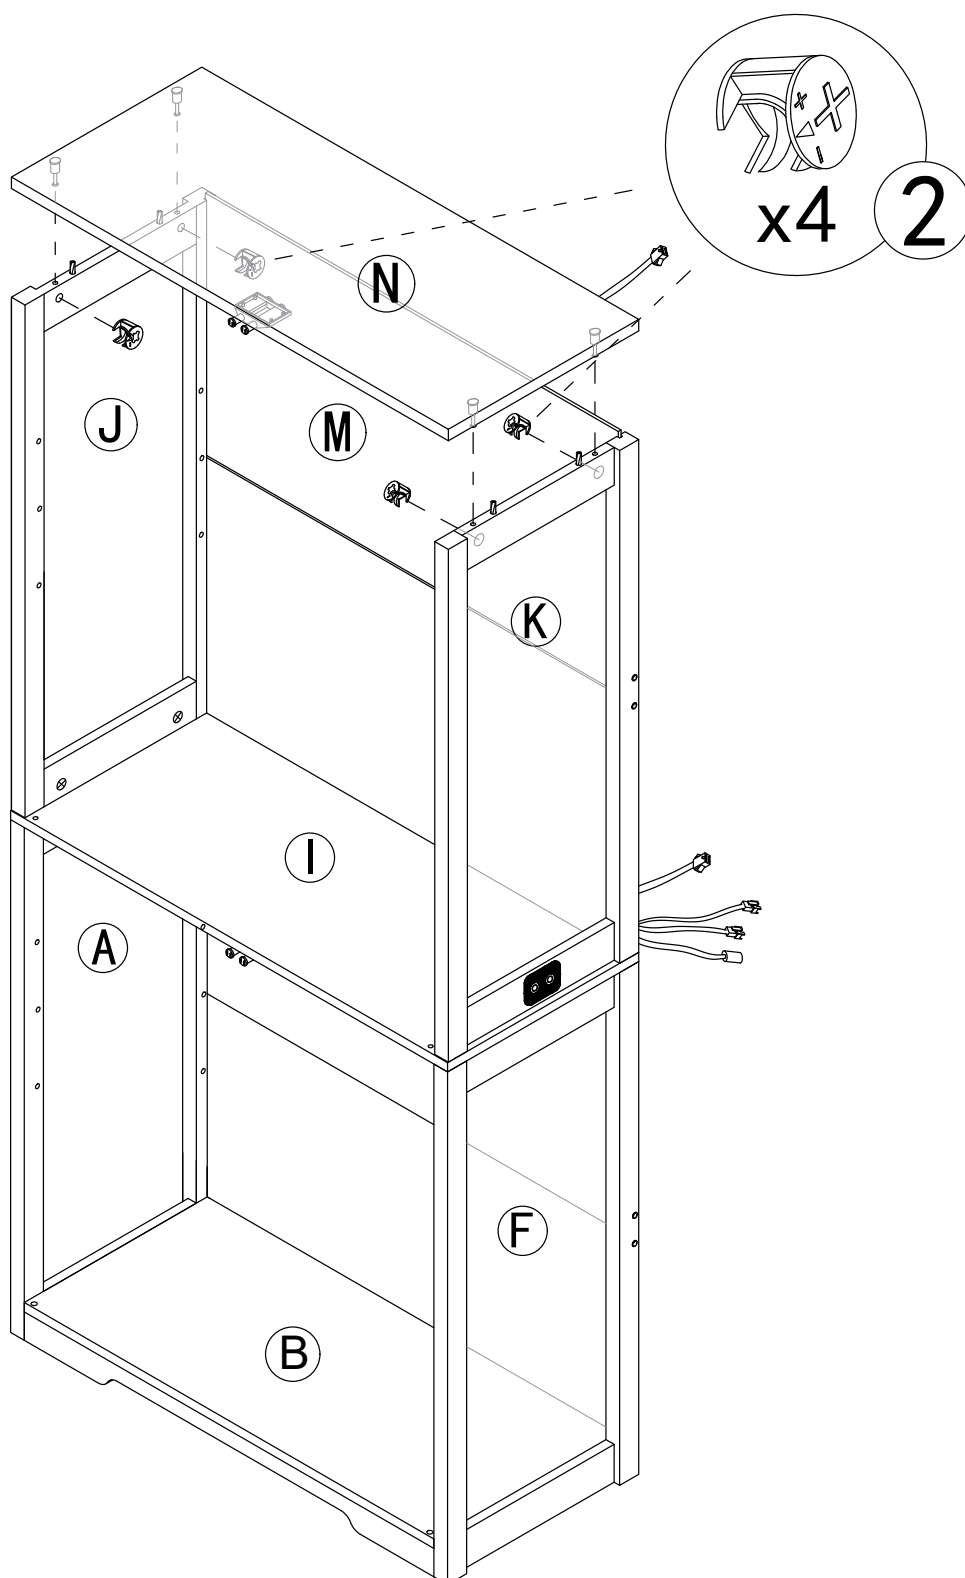

Step 23

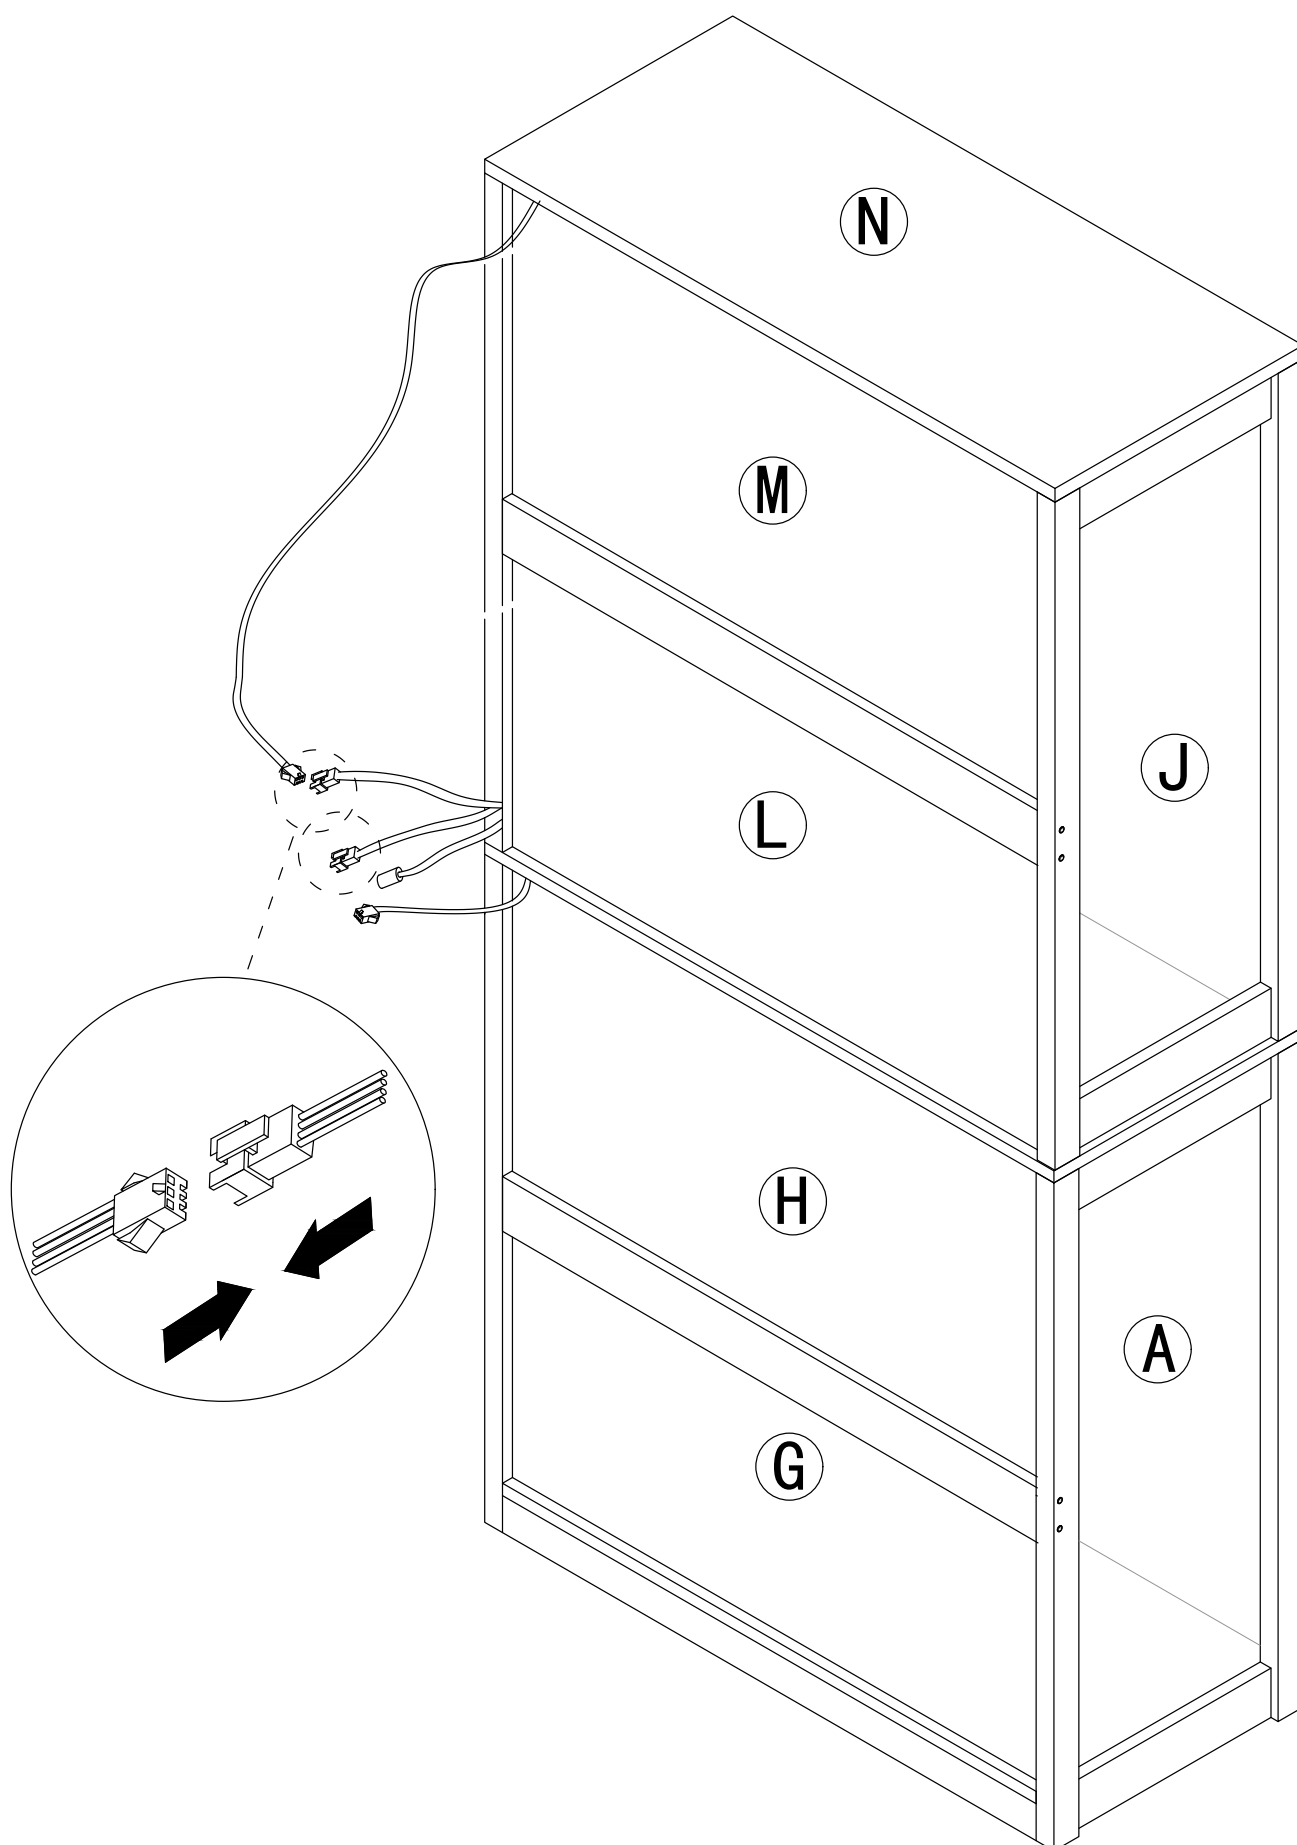


Step 25

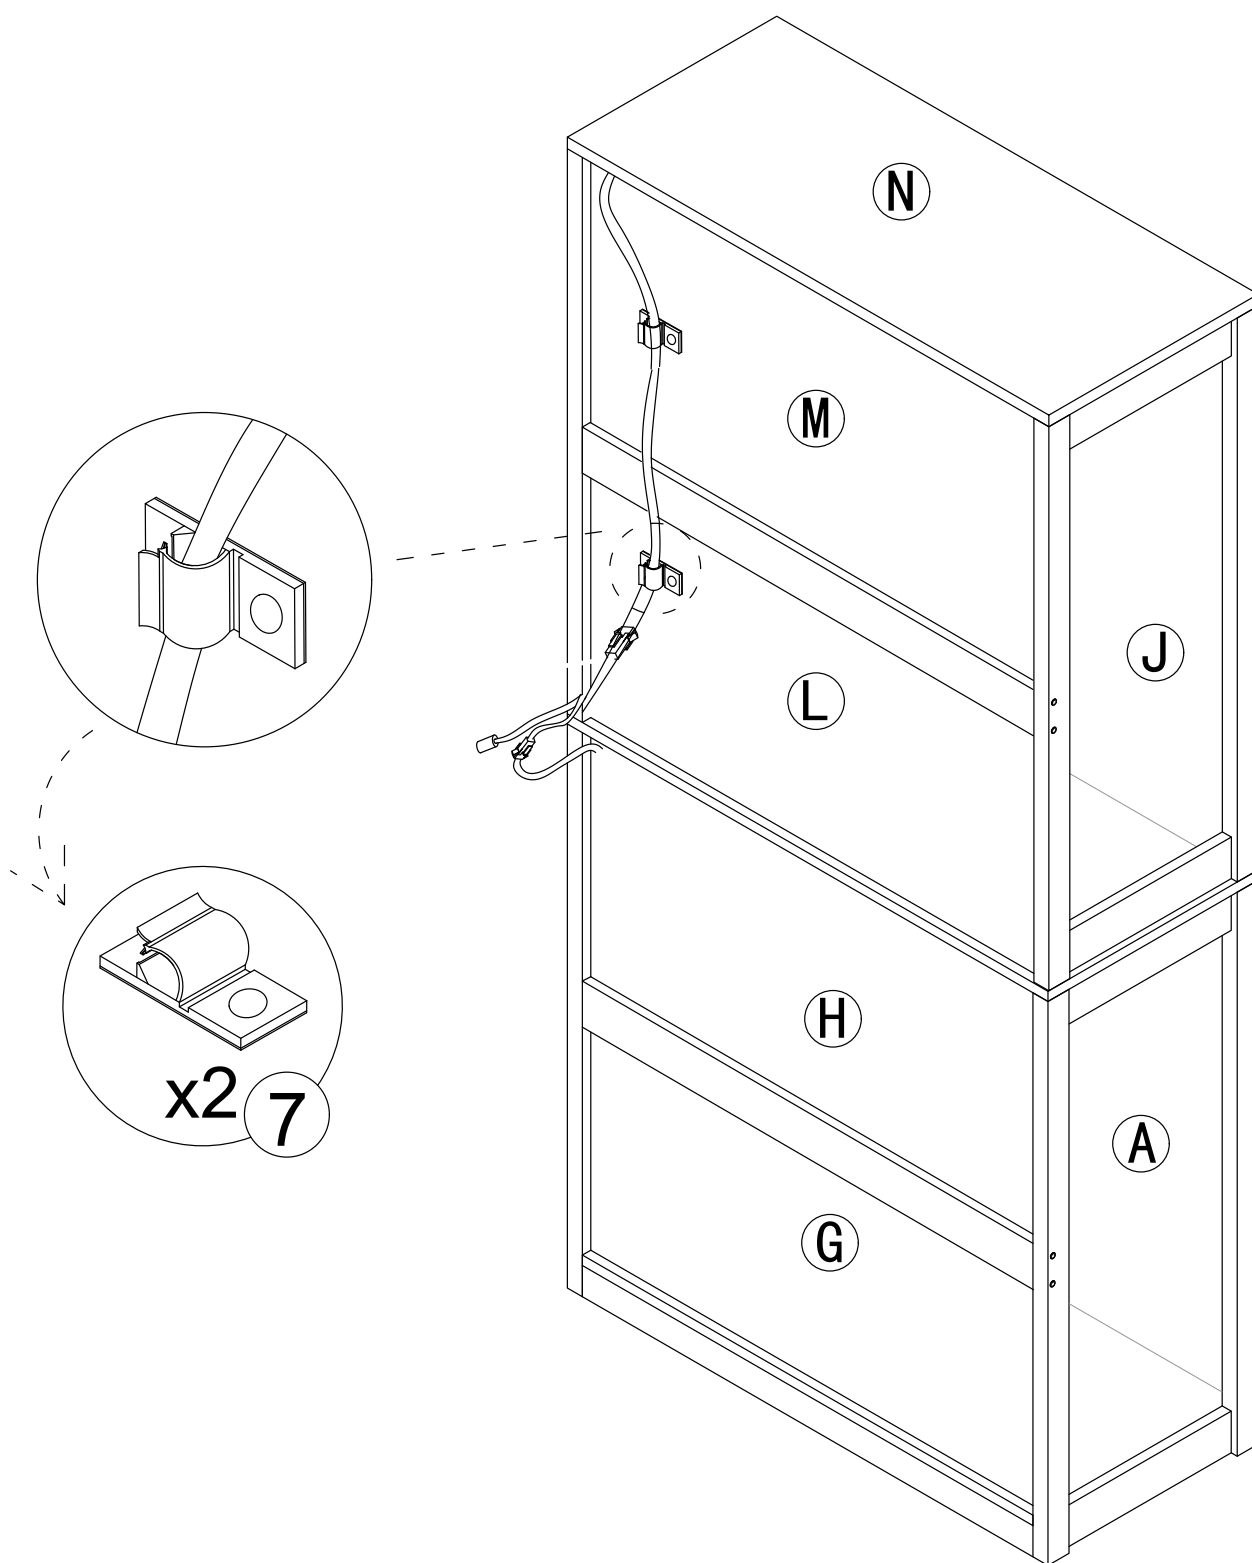


Step 26


8



x12

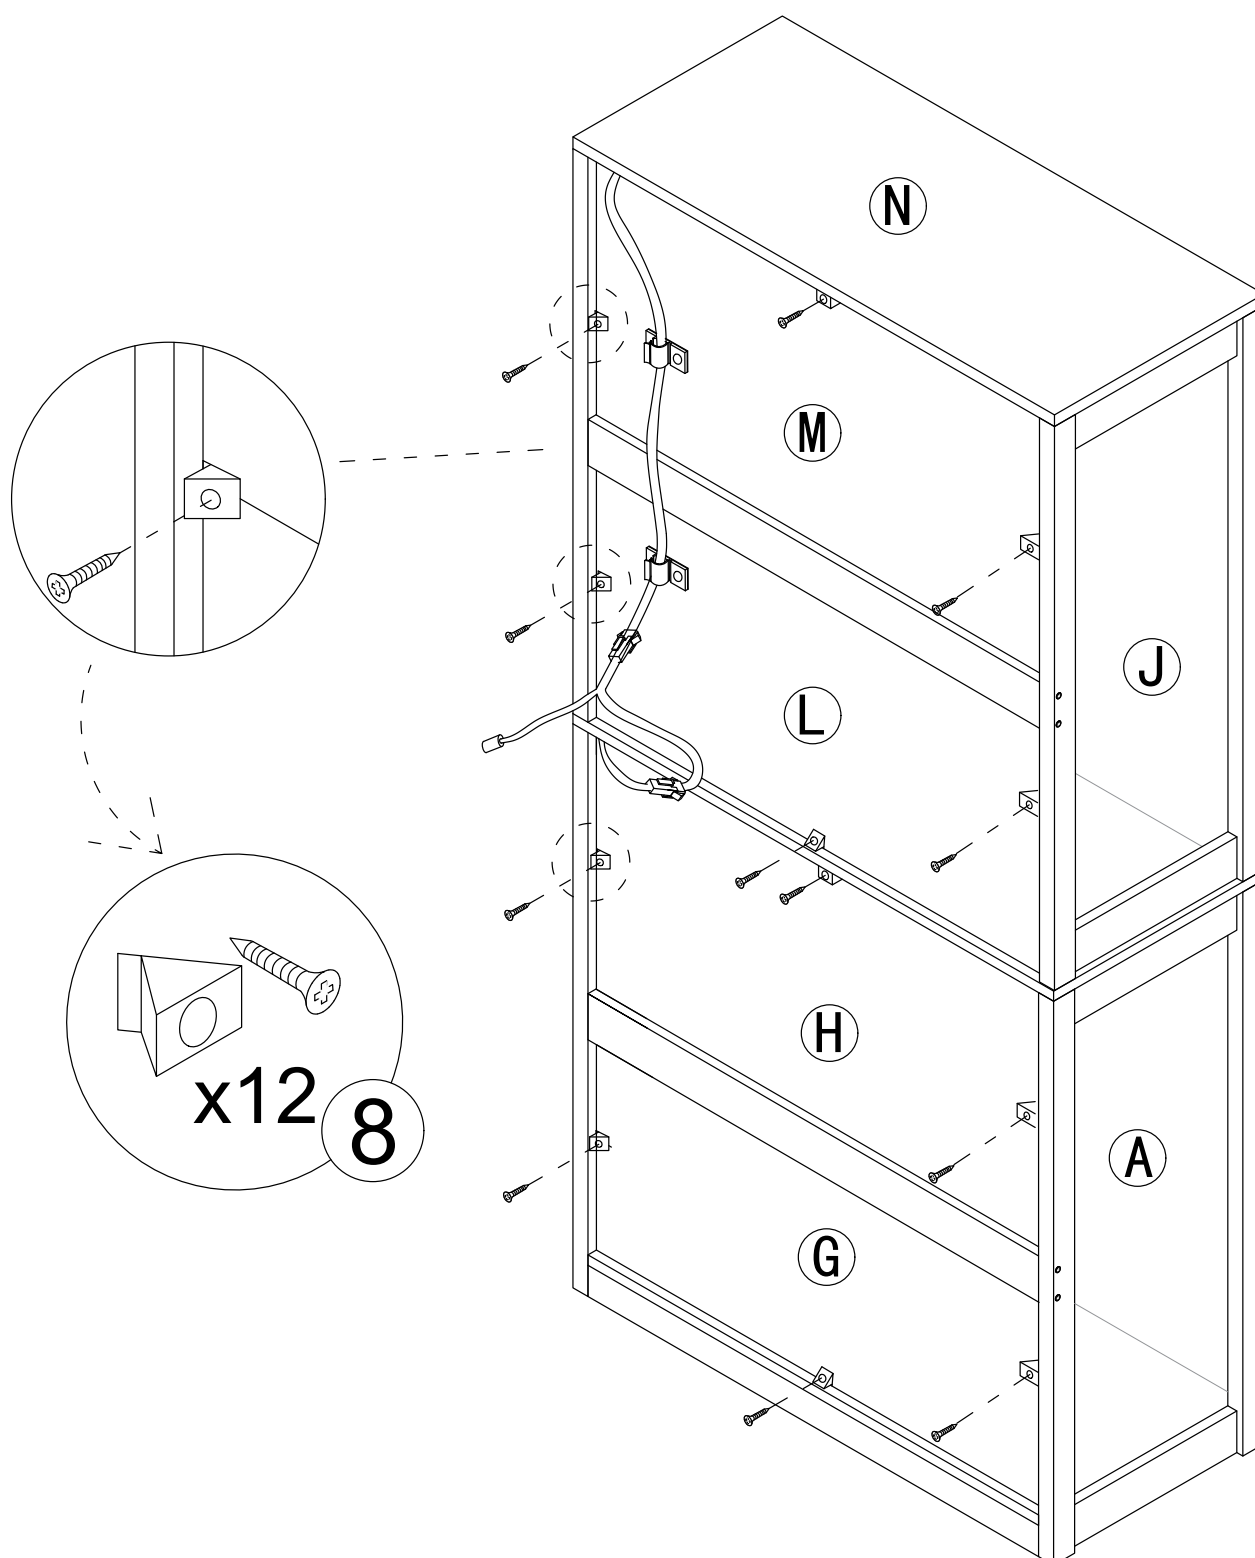


5




4pcs

10



8pcs



1pcs

11


x2

x2


x2

x2

x4

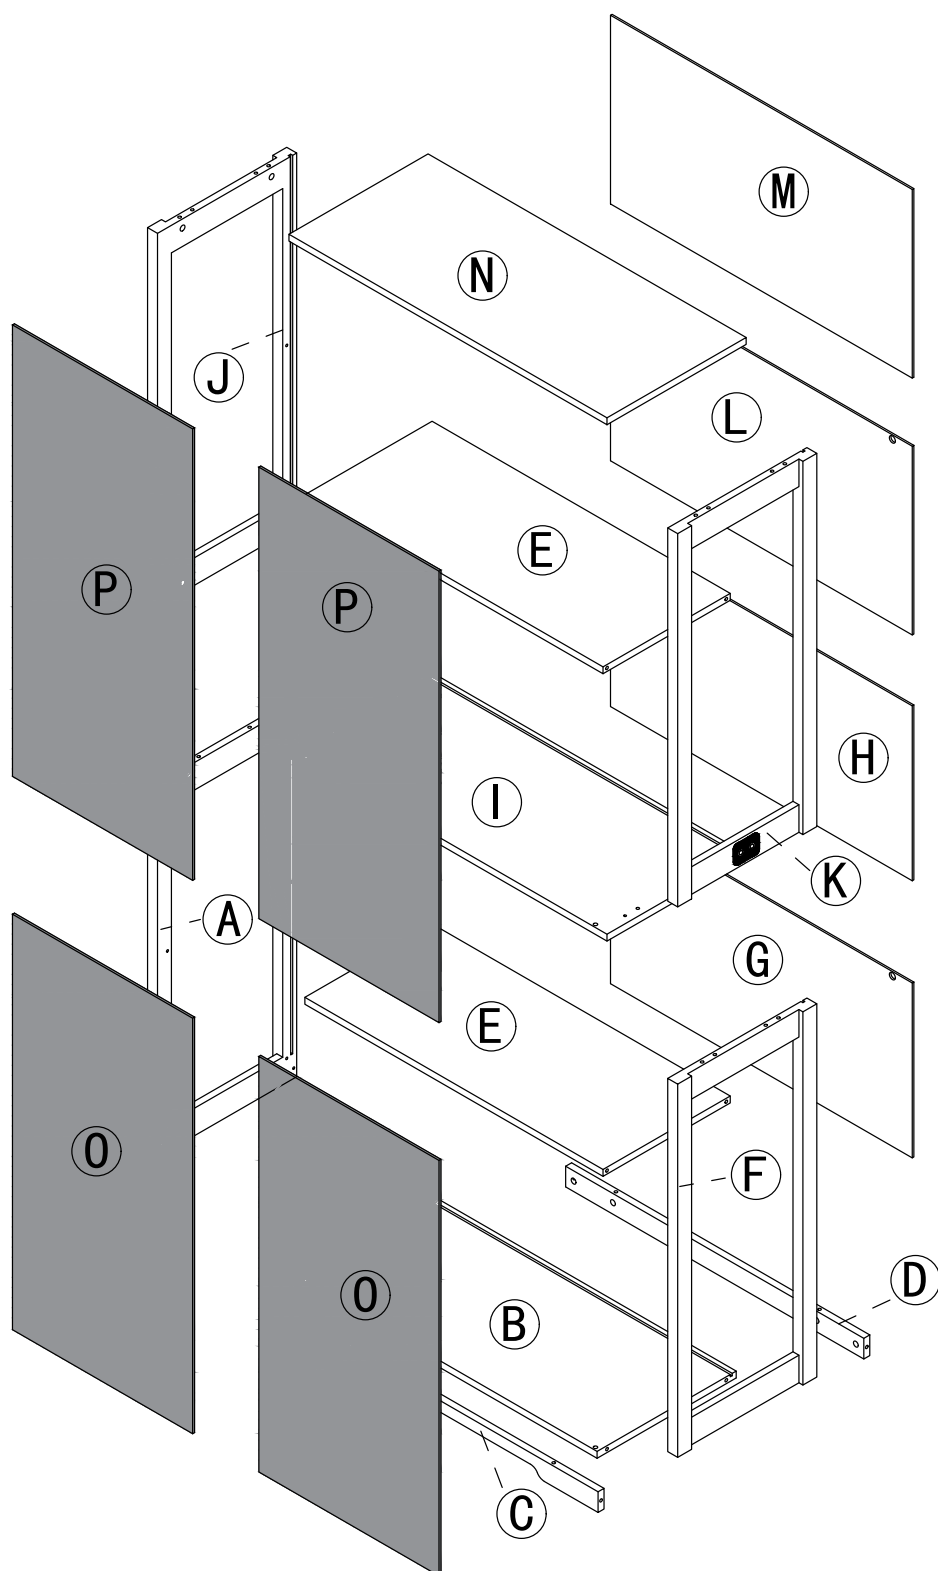


Step 28

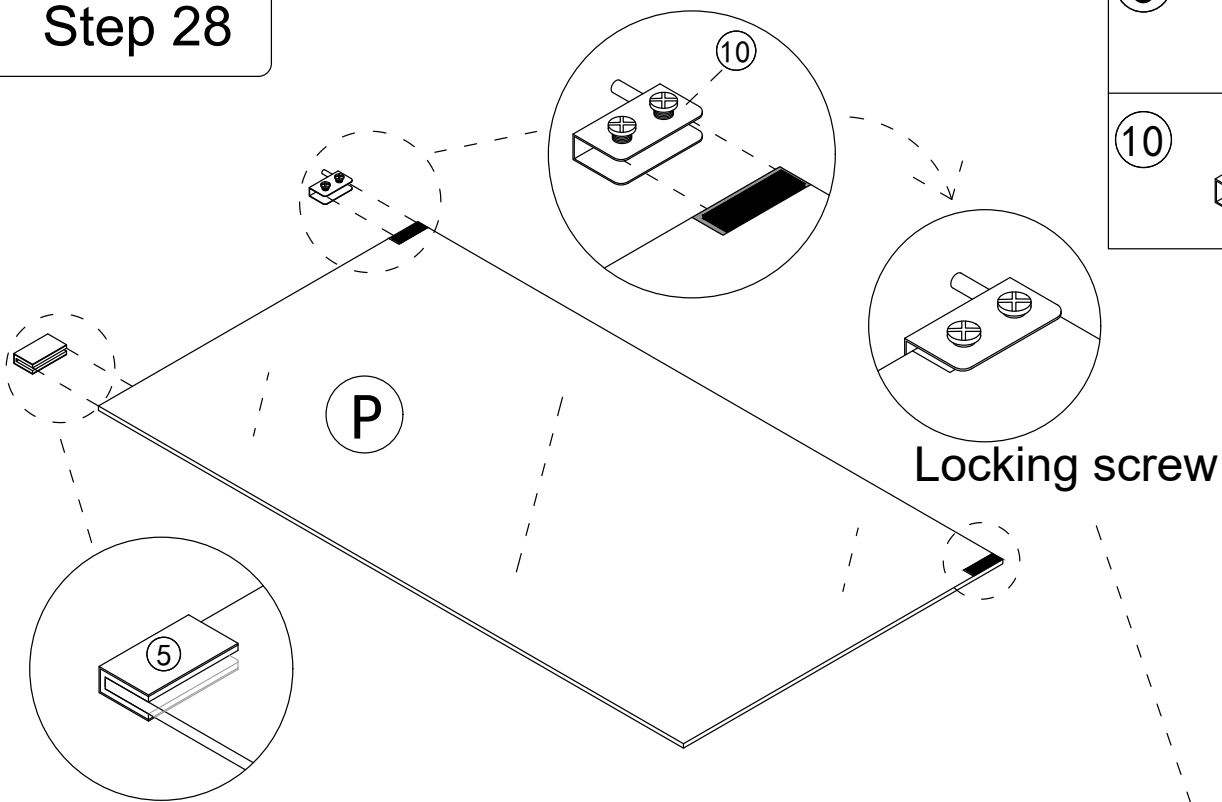



Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Step 29

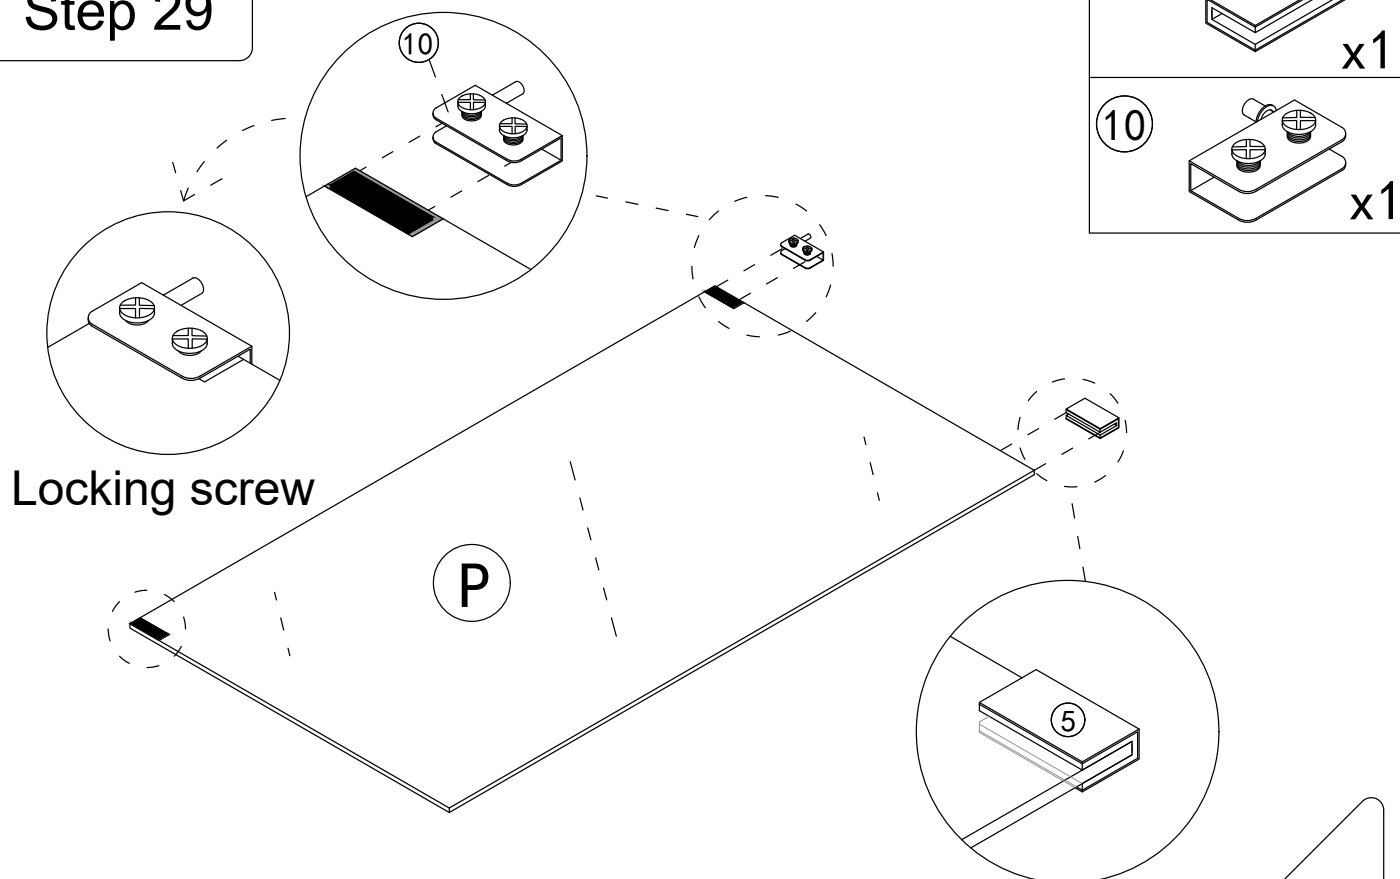

Step 30

10   x4

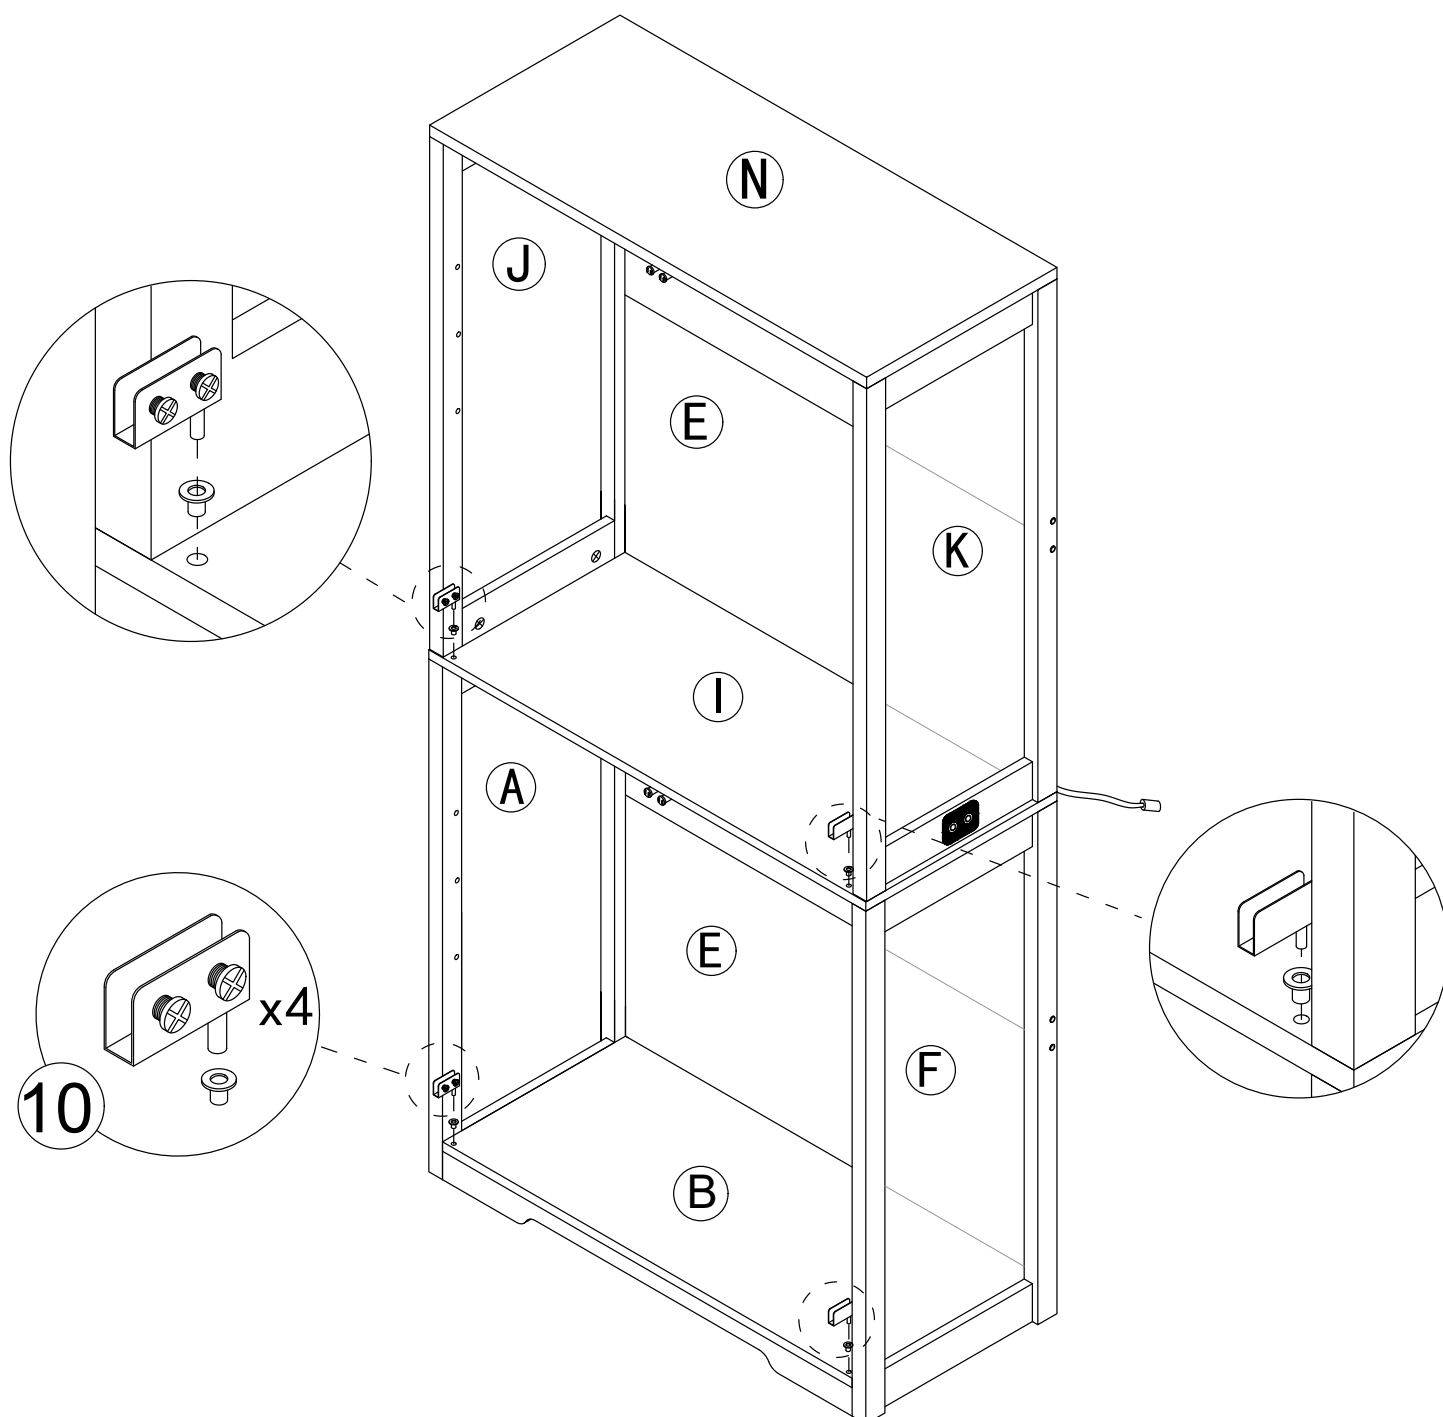


Step 31

10





x2




first

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.



Pay attention to the direction of the door hinge during installation





second
Locking screw

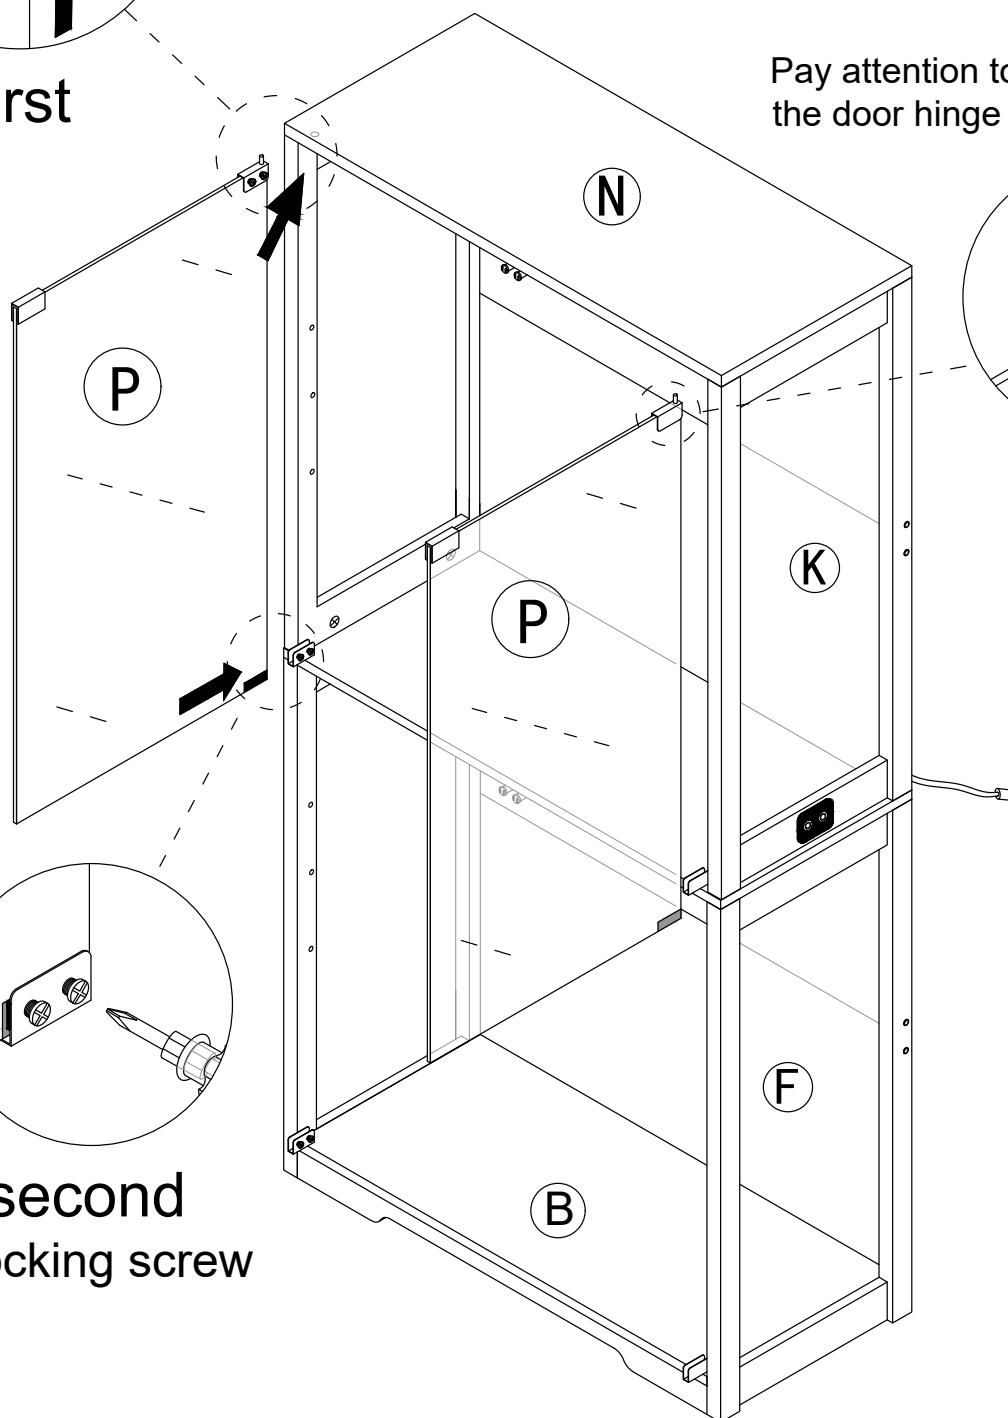

Step 32

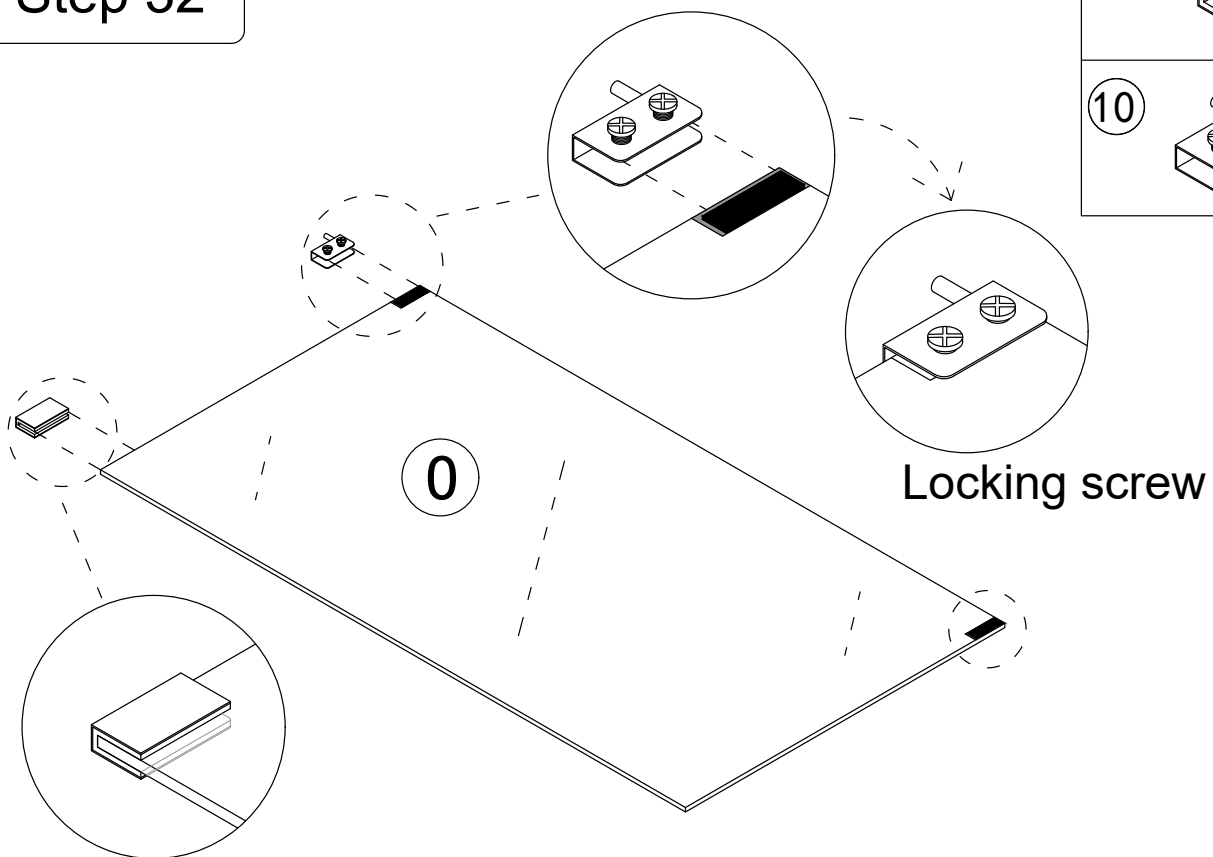


Step 33

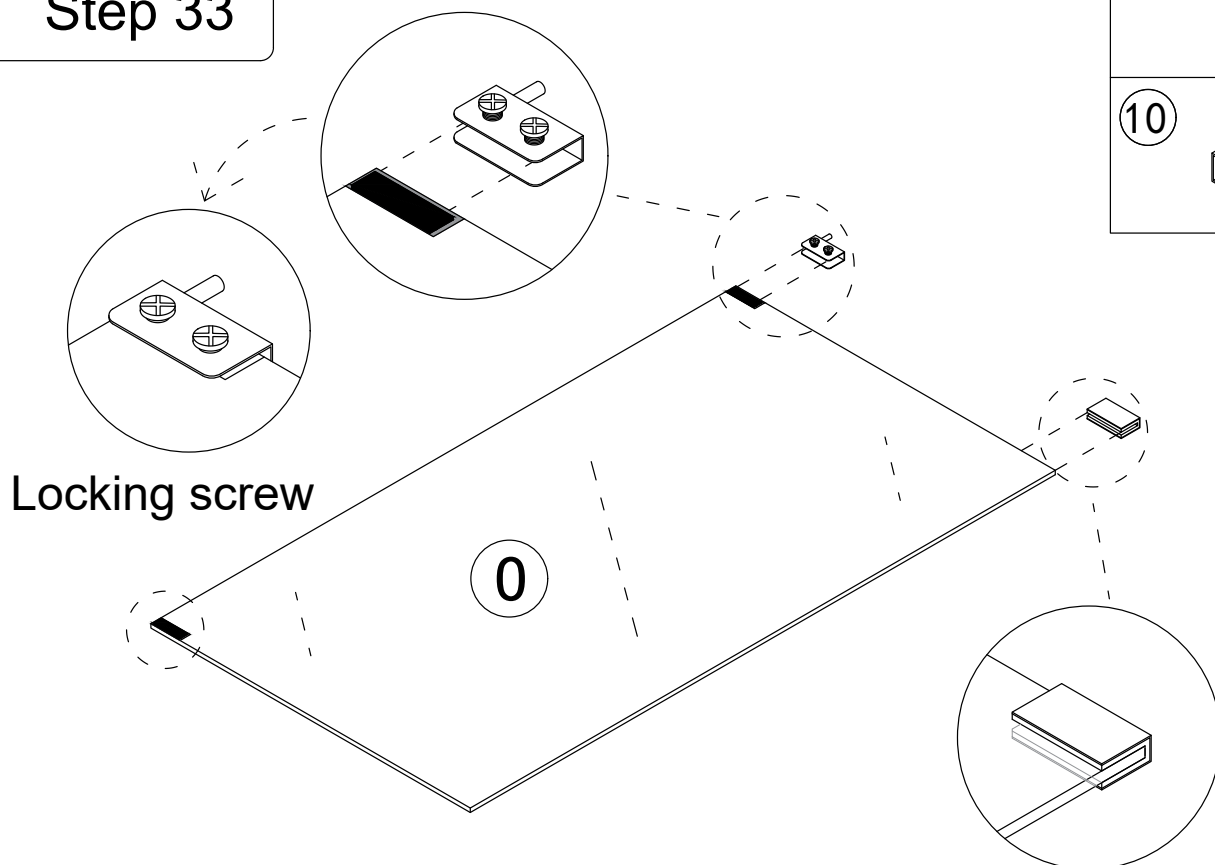


Step 34


The rebound device automatically opens and closes by pressing

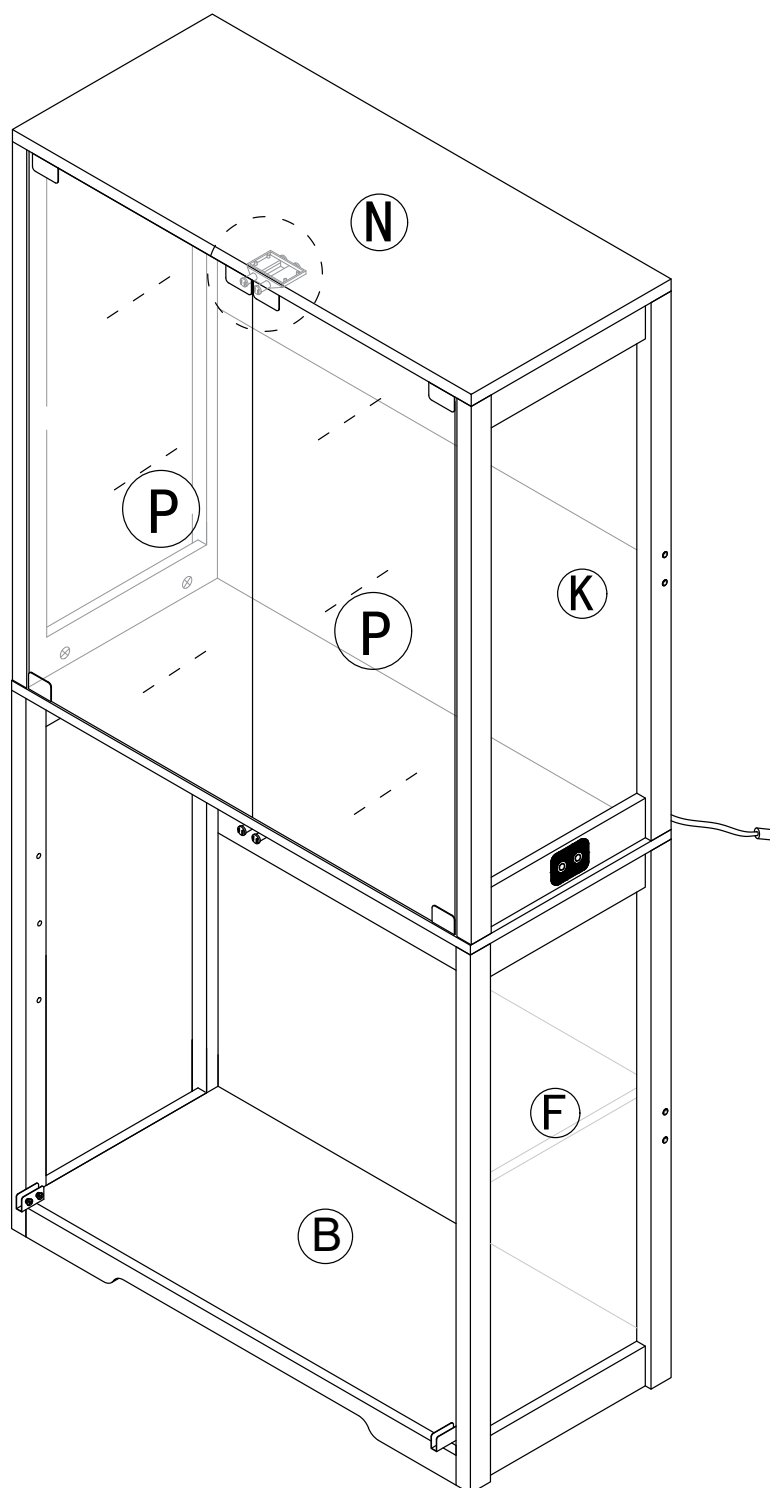

Open the glass door

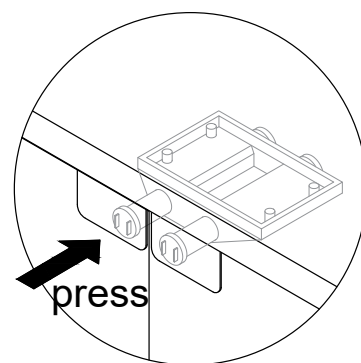

Close the glass door

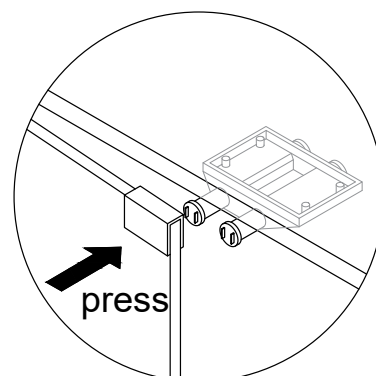


Step 35

10





x2

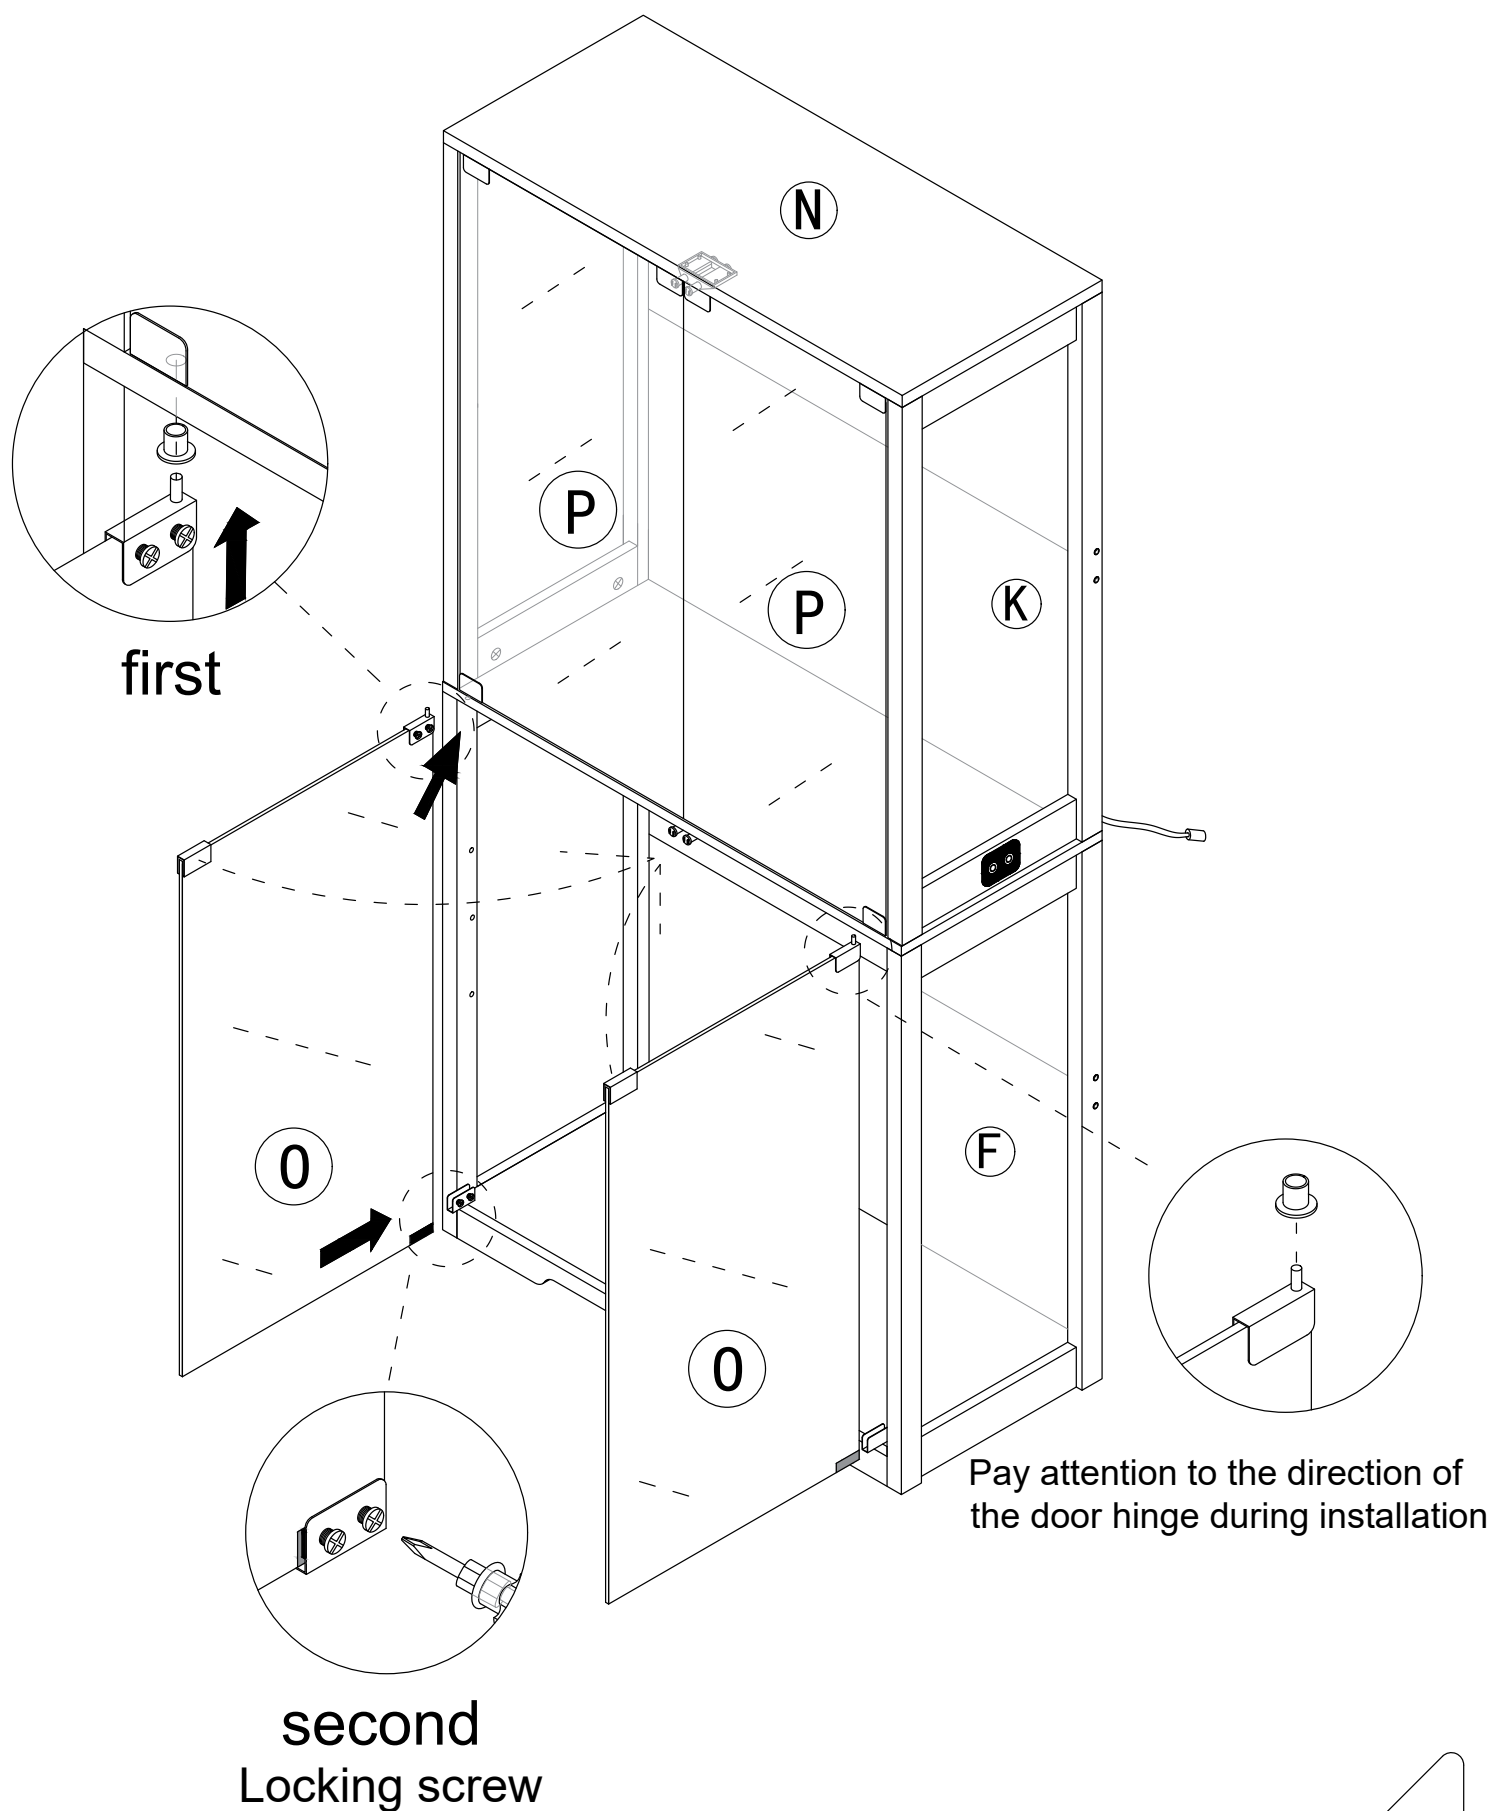


Pay attention to the direction of the door hinge during installation

Step 36

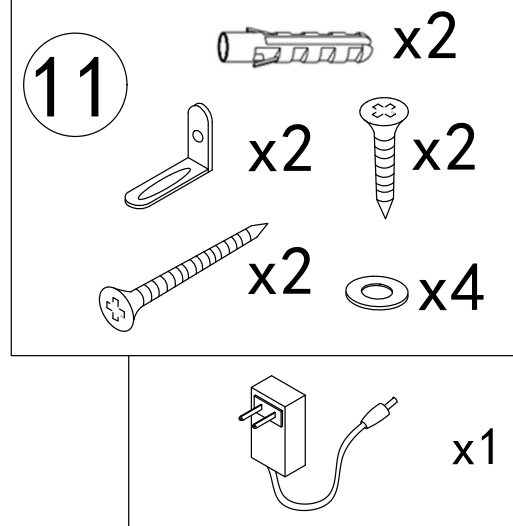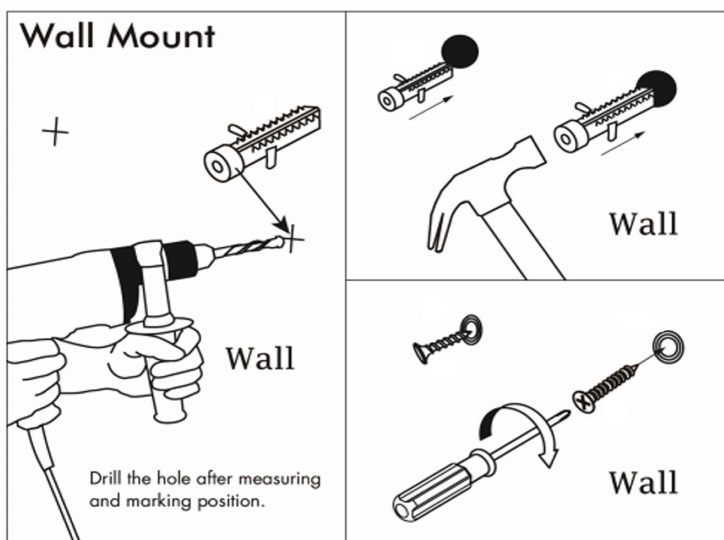


Install as required


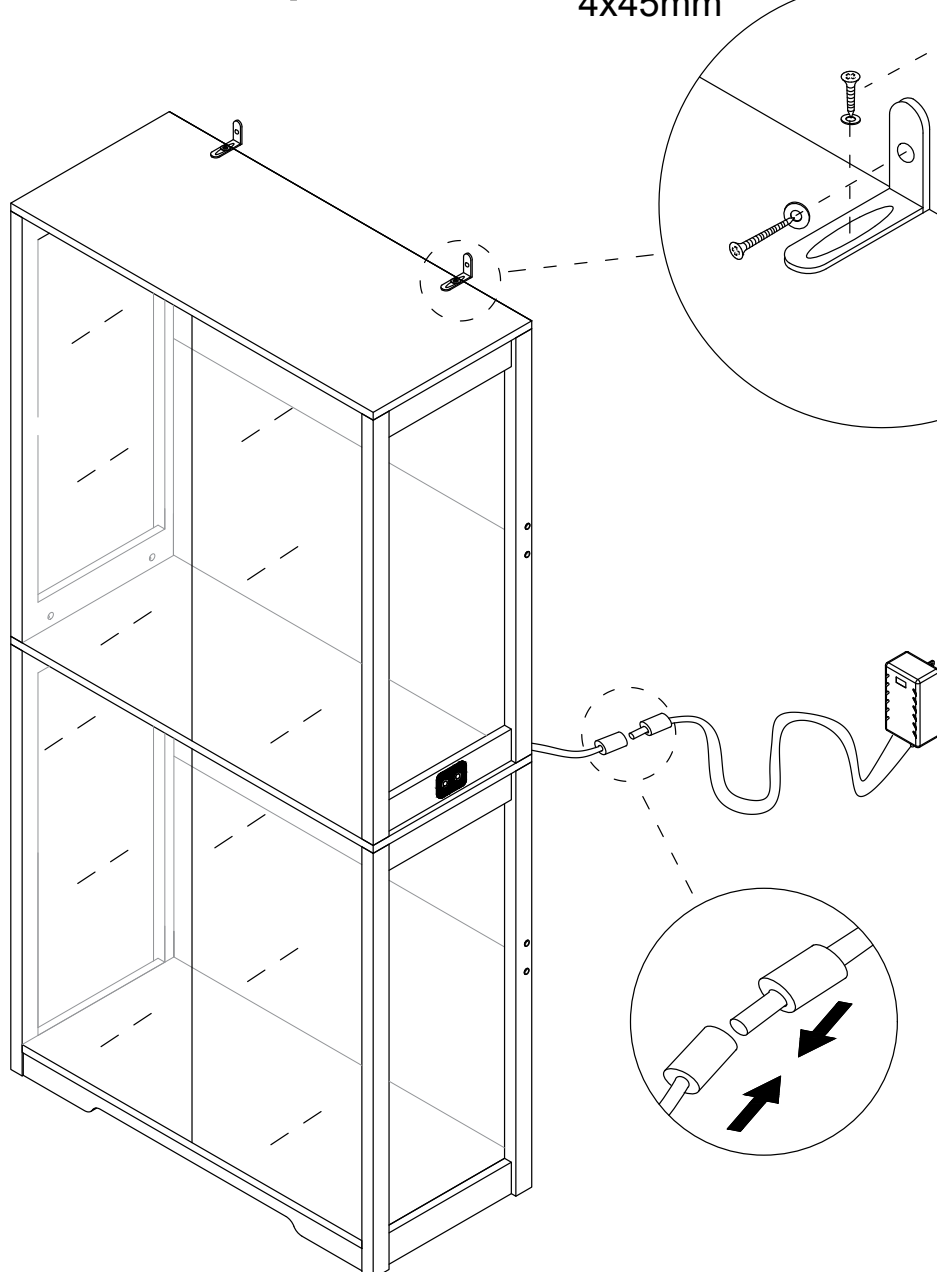


Step 37

9




x2

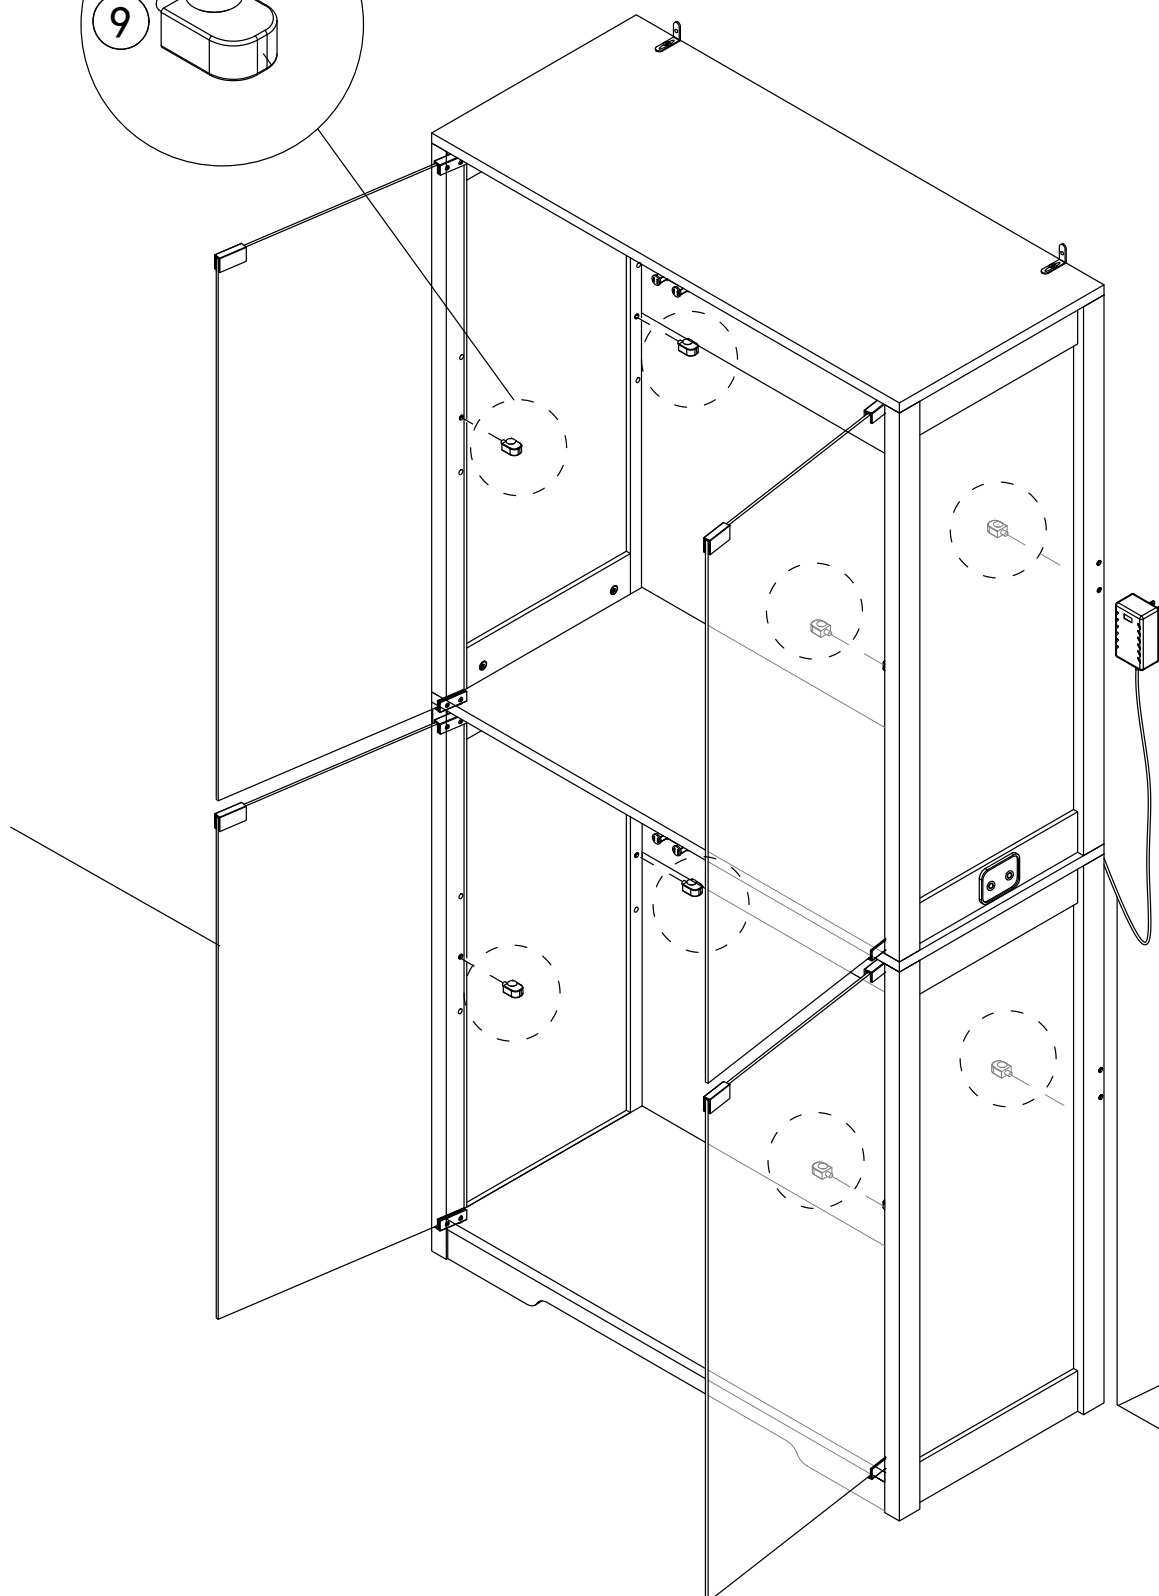

Step 38

E



x2

Insert the glass shelf at an angle.



E

Insert the glass shelf at an angle.

E

Step 39

"The height of the shelf bracket mounting holes can be changed."

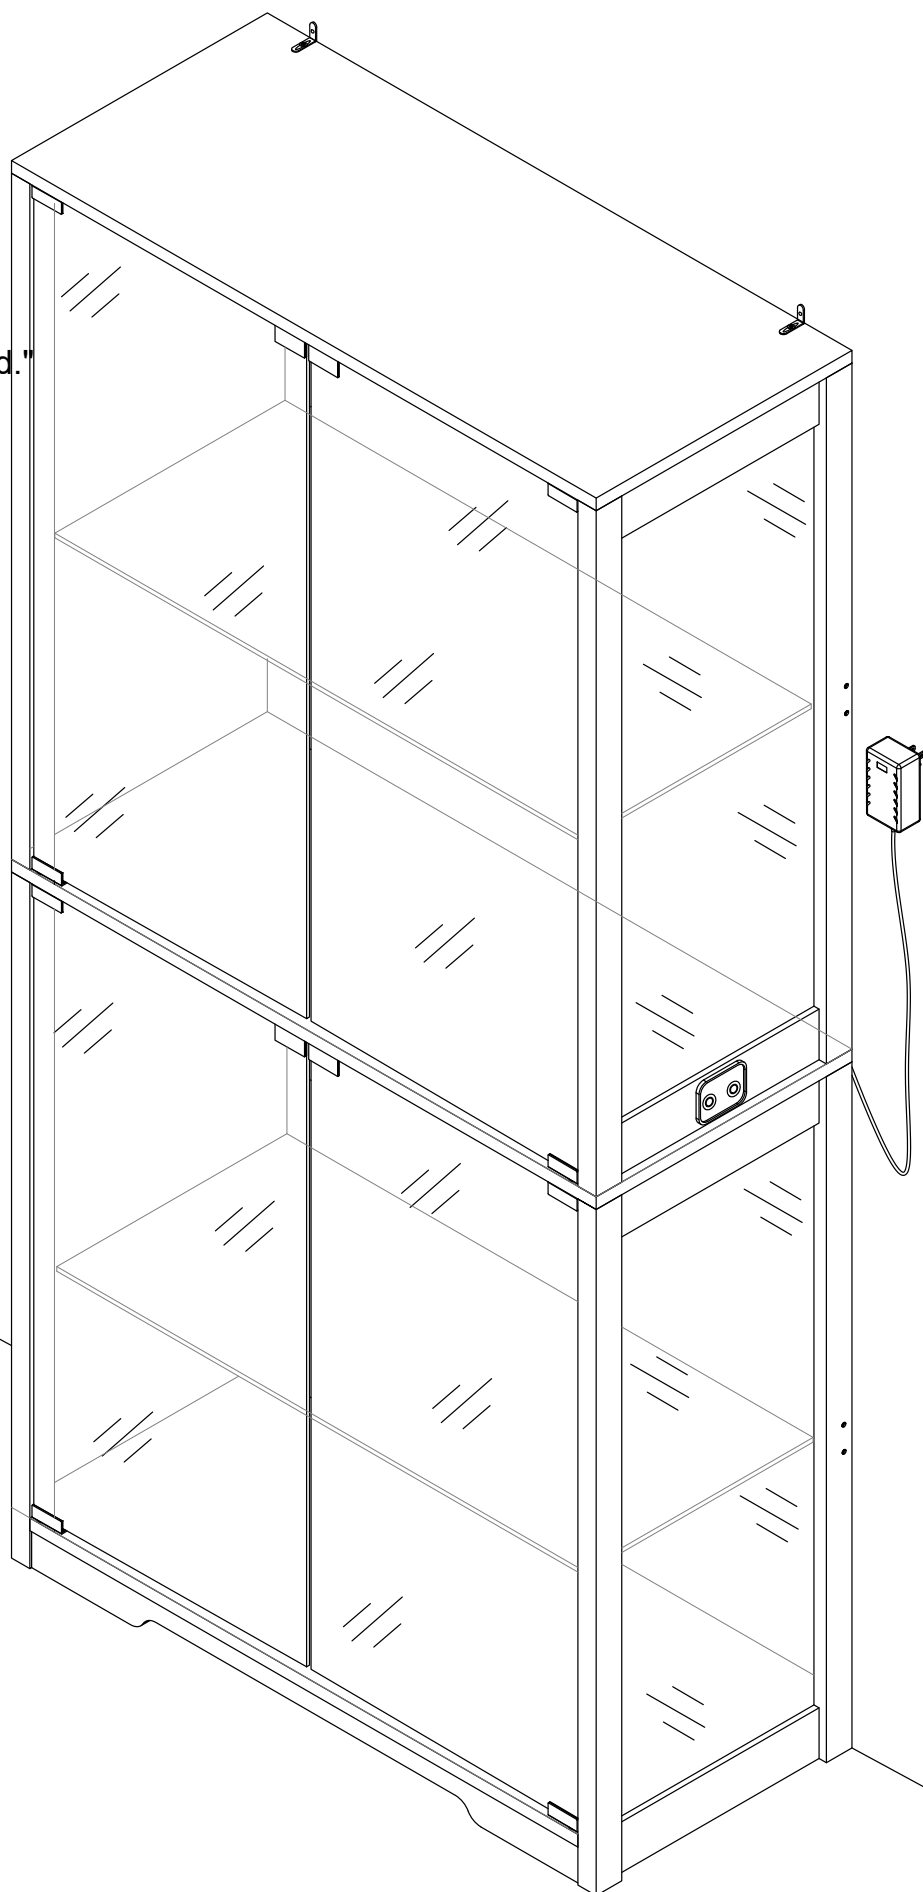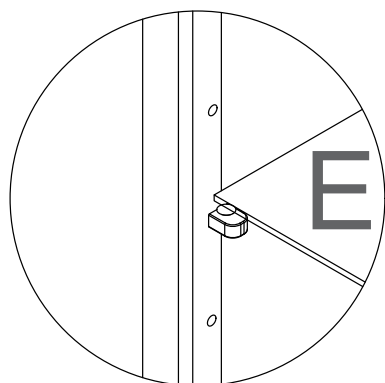


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

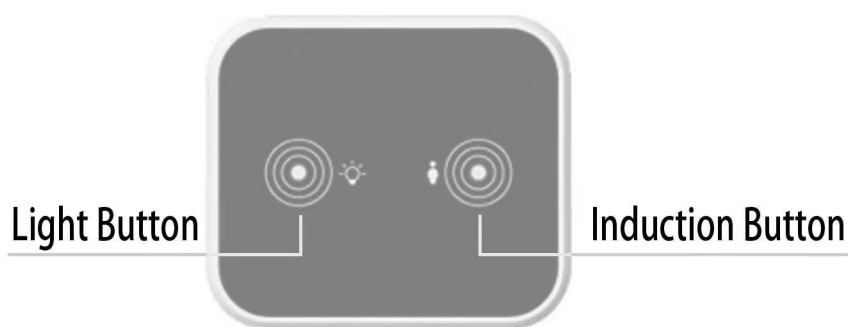

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.