

### Features


- *Acrylic*
- *Bask™ heated lumbar support with three temperature settings*
- *Textured bottom surface*
- *Integral apron with removable access panel*
- *Integral tile flange*
- *3-wall alcove installation*
- *Left or right drain*
- *66" (1676 mm) x 36" (914 mm) x 20" (508 mm)*

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASTM E162*
- *ASTM E662*
- *CSA B45.5/IAPMO Z124*
- *UL 1795*

### 5.5' APRON BATH WITH BASK™ HEATED SURFACE **K-1229-LAW** ALSO K-1229-RAW

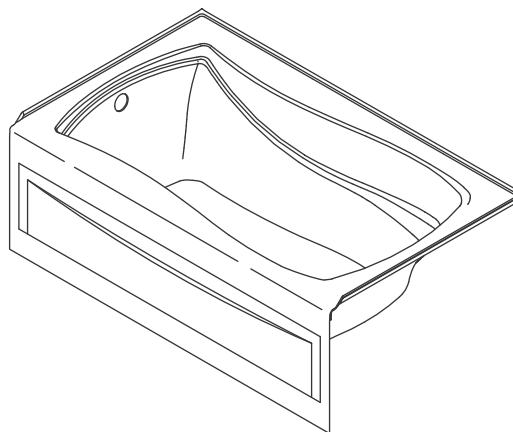

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-1229-LAW	5.5' Apron bath with Bask heated surface – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1229-RAW	5.5' Apron bath with Bask heated surface – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7161-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

### Product Specification

The acrylic bath shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Bath shall have textured bottom surface. Bath shall have an integral apron with removable access panel and integral tile flange. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall be for 3-wall alcove installation. Bath shall be available with left or right drain. Bath shall be Kohler Model K-1229-\_\_\_\_-\_\_\_\_.

# MARIPOSA™

## Technical Information

Fixture*:				
Bathing well:				
Basin area, top		48" (1219 mm) x 24" (610 mm)		
Basin area, bottom		59" (1499 mm) x 30" (762 mm)		
Weight		65 lbs (30 kg)		
To overflow:				
Water depth		14" (356 mm)		
Capacity		67 gal (254 L)		
* Approximate measurements for comparison only.				
Drop-in cutout		58" (1473 mm) x 34" (864 mm)		
Heater:	W	V	HZ	A
	65	120	60	.5

## Installation Notes

Install this product according to the installation guide.



**NOTE:** Unless otherwise specified, floor support under the bath must provide for a minimum of 39 lbs/square foot (193 kg/square meter) loading.

Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.


40" (1016 mm) cable is included.

No change in measurements if connected with drain illustrated. (K-7161-AF)

Recommended faucet area.

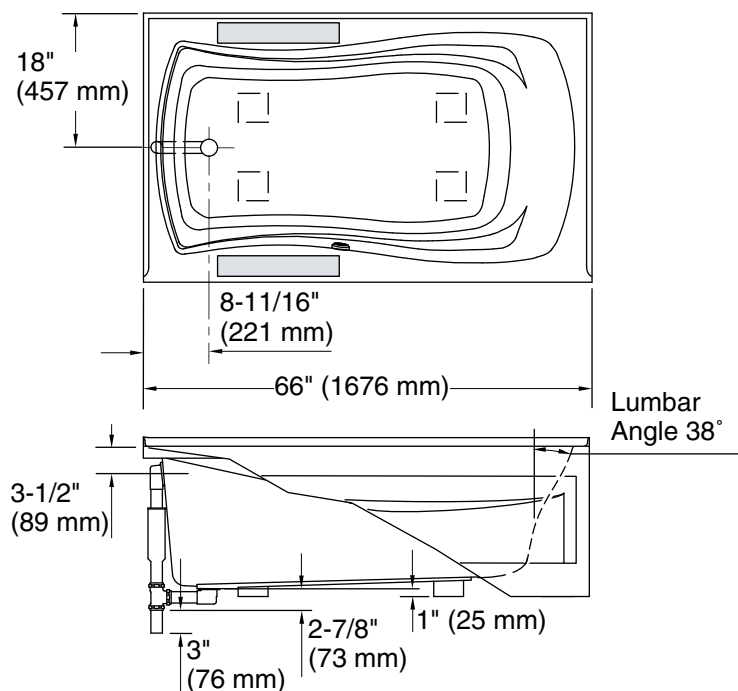

**Integral Flange Detail**

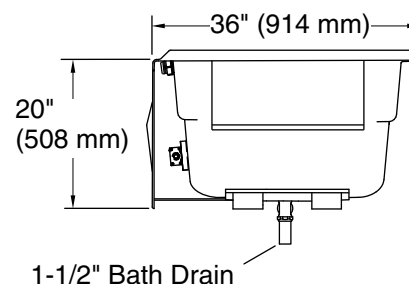

## Product Diagram

MARIPOSA™ 5.5' APRON BATH WITH BASK™ HEATED SURFACE

Page 2 of 2  
1201646-4-B

THE BOLD LOOK  
OF **KOHLER**®