



Bellwether® | K-847

66" x 32" alcove bath, left drain

Features

- Clean lines and streamlined style add contemporary appeal to any bathroom
- 16-1/2" apron height for easy entry and exit
- Standard size simplifies installation in remodels
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Wide ledges for extra storage space



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|---------|
| 0 | White |
| 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-06-2026 17:11 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



ASME A112.19.1/CSA B45.2
ASTM F462
ADA
ICC/ANSI A117.1

Warranty

See website for detailed warranty information.

KOHLER® Enameled Cast Iron Bath and Shower Base
Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Drain Location:	Left
Drain Hole Diameter:	2-3/16" (56 mm)
Minimum Flat for Door:	2-9/16" (64 mm)
Basin Area, Bottom:	50-3/4" x 20-5/16" (1289 mm x 516 mm)
Basin Area, Top:	58-7/16" x 22-5/8" (1484 mm x 575 mm)
Water Depth:	11-11/16" (297 mm)
Water Capacity:	49 gal (185.5 L)
Minimum Floor Load:	57 lbs/ft ²
Weight:	380 lbs (172.4 kg)


Material

- KOHLER® enameled cast iron

Recommended Products/Accessories

K-23726 Drain treatment
K-23725 Cast iron cleaner
K-7259 Brass toe tap bath drain



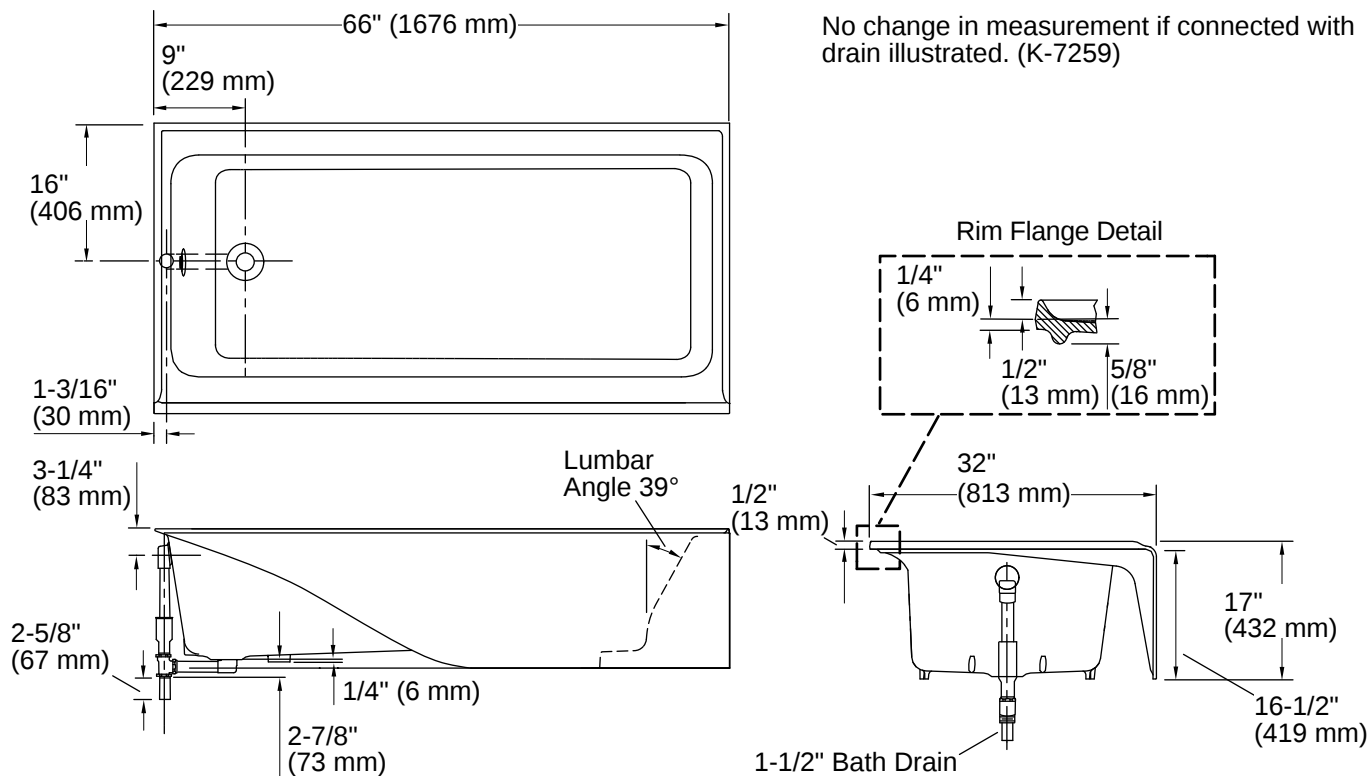

Installation

- Left drain
- Alcove

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

