T10LED201-6PK

8W CRI 80 3000K 900 Lumens LED Filament Bulb



Perfect for lanterns or any exposed bulb application.
Classic filament design creates a unique vintage feel in any room.
15,000 hours lifespan is guaranteed.
EMC Compliant.

Performance
• Compatible with most dimmers;
Dimming smoothly from 10% to 100%.
• 80W Incandescent replacement;
•ETL compliant

Construction
• Glass cover
• Filament
• Integrated driver
• Gold E26 base

Installation
• Directly replace a 80W incandescent lamp.
• Suitable for dry locations; indoor use only
• 120V AC input

Specifications

Category	Light Bulb	**Inner Package Length (Inch)**	5.59
Bulb Shape	T10	**Inner Package Width (Inch)**	4.25
Bulb Base Type	E26	**Inner Package Height (Inch)**	9.37
Bulb Base Finish	Gold	**Inner Package Weight Per Unit (Lbs)**	1.04
Color Temperature	3000K	**Inner Package Quantity**	6
Beam Angle	330°	**Carton Package Length (Inch)**	22.64
Finish	Clear Glass	**Carton Package Width (Inch)**	12.2
CRI	80	**Carton Package Height (Inch)**	10.35
Average Life (Hours)	15000	**Carton Package Weight Per Unit (Lbs)**	11.36
Estimated Yearly Energy Cost (11￠/Kwh)	0.96	**Carton Quantity**	60
Life Based On 3Hrs/Day (Years)	13.70	**Lamp Type**	LED Filament
Product Length (Inch)	N/A	**Dry/Wet/Damp**	Dry
Product Width (Inch)	Φ1.13"	**Energy Star**	NO
Product Height (Inch)	7.28"	**Power Factor**	0.8
Product Extension (Inch)	N/A	**Current**	70mA
Product Weight Per Unit (Lbs)	0.1	**Lumen/Watt**	112.5
Dimmable	YES	**Warranty (Year)**	1
Watts	8W	**DLC (Yes/No)**	No
Watt Equivalent	80W	**Input Voltage**	120V
Lumens	900	**Housing Material**	Glass
Certification (UL/FCC/RoHS)	RoHs	**Lens**	Clear Glass
Individual Box Length (Inch)	1.42	**Led Type**	San'an
Individual Box Width (Inch)	1.42		
Individual Box Height (Inch)	7.87		
Individual Box Weight Per Unit (Lbs)	0.14		


T10LED201-6PK


8W CRI 80 3000K 900 Lumens LED Filament Bulb

Lum Limit Curve

Luminous Intensity Distribution Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

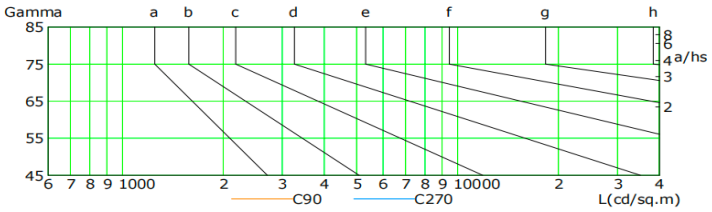


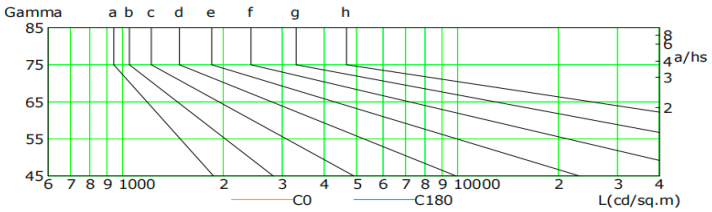


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	79	88	95	102	107	112	116	118	120
C90	78	87	96	103	109	114	118	121	123
C180	53	58	63	67	70	73	75	77	78
C270	49	53	57	59	62	64	66	66	67

C Plane (°):0.0-360.0: 30.0
Test Lab: TM
Test Type: TYPE C
Temperature:
Operator: TM#0001

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.023 m
Humidity:
Inspector:

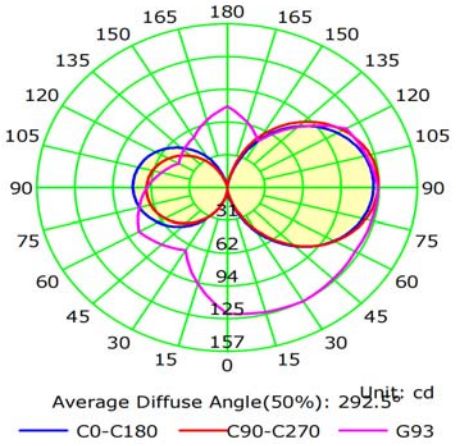

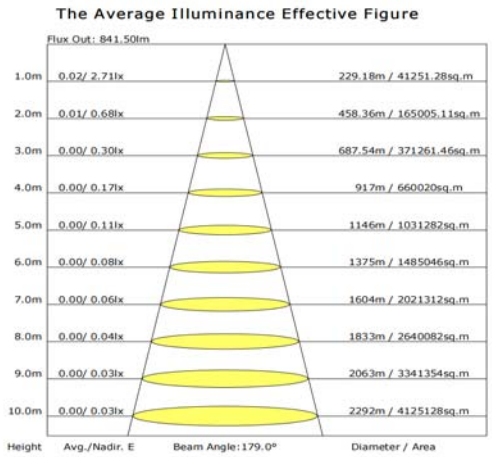

Dimmer Types

Brand	Model#
LEVITON	6672-1LW
LEVITON	6674-P0W
LUTRON	S-600P-WH
LUTRON	MACL-153M-WH
LUTRON	DVCL-153P-WH
LUTRON	D-600PH-3CK
LUTRON	D-600PH-DK
LUTRON	D-600R