


Features

- Acrylic
- Coordinates with the Purist® Suite
- 8 Flexjet™ whirlpool jets
- Less all trim
- Variable speed pump with 1.5 kW heater and back-lit user keypad
- Deep bathing well 21" (533 mm)
- 72" (1829 mm) x 46" (1168 mm) x 25-11/16" (652 mm)

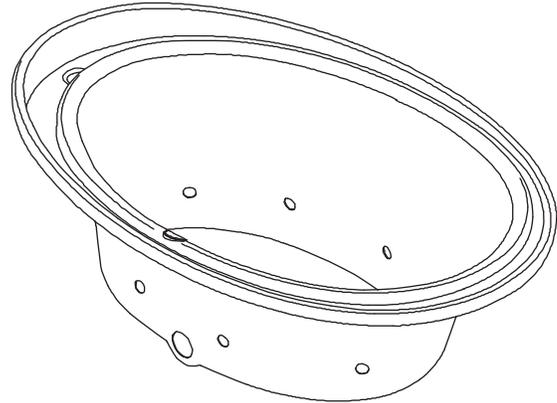

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1110	Bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories

K-589	Undermount template kit (for undermount installations only)		<input type="checkbox"/> NA	
K-7273	Clearflo horizontal overflow bath drain	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____
K-9698	Jet trim kit	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____

Optional Accessories

K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1703	Remote control		<input type="checkbox"/> NA	

Product Specification

The acrylic bath whirlpool shall be 72" (1829 mm) in length, 46" (1168 mm) in width, and 25-11/16" (652 mm) in height. Product shall have a variable speed pump with 1.5 kW heater and back-lit user keypad. Product shall have 8 Flexjets. Product shall feature a 21" (533 mm) deep bathing well. Product shall be less all trim. Product shall coordinate with Purist Suite. Bath whirlpool shall be Kohler Model K-1110-_____.

PURIST®

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	45" (1143 mm) x 25-1/2" (648 mm)			
Basin area, top	63" (1600 mm) x 31-1/2" (800 mm)			
Weight	160 lbs (72.6 kg)			
To overflow:				
Water depth to rim	21" (533 mm)			
Capacity	115 gal (435.3 L)			
* Approximate measurements for comparison only.				
Included components:				
Cut-out template (drop-in only)			1016369-7	
Pump	Heater	V	Hz	A
	1.5 kW	240	50/60	15

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	220/240 V, 20 A, 50/60 Hz

Installation Notes


Install this product according to the installation guide.

Pump/piping protrudes beyond rim (see below).

Floor support under whirlpool must provide a minimum of 50 lbs/square foot (243 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements with drain shown. (K-7273)

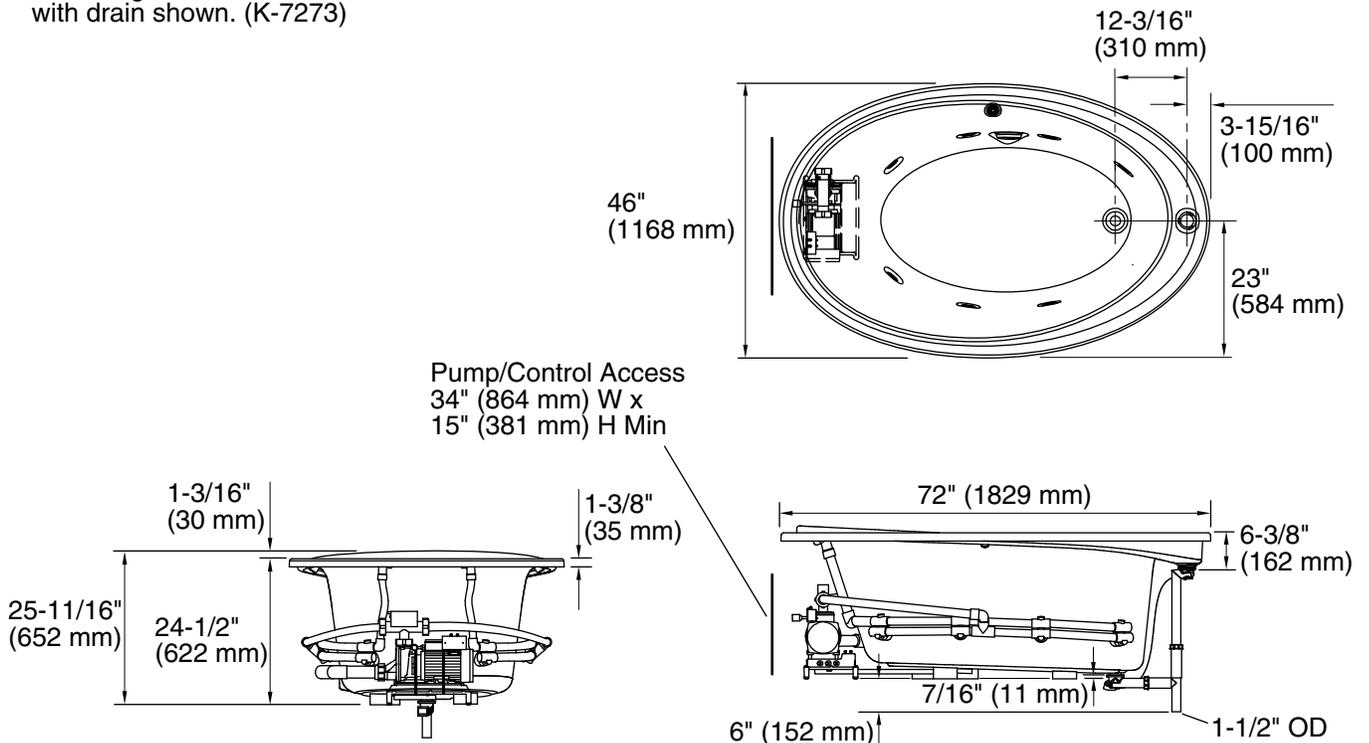

Product Diagram