



Installation 147-3

To avoid scratches and swallowing parts, please do not install by children!

Hardware List		
 Seat Qty: 1	 Backrest Qty: 1	 Back cushion Qty: 1
 Seat cushion Qty: 1	 Sofa cover Qty: 1	 Cover plate Qty: 1
 Back cover Qty: 1	 Inserted rod Qty: 2	 Legs Qty: 4
 Connector Latch Qty: 1	 Screws(8x20mm) Qty: 2	

1 Seal the bottom with the back cover. And then screw the sofa Legs into the reserving holes on the sofa base.

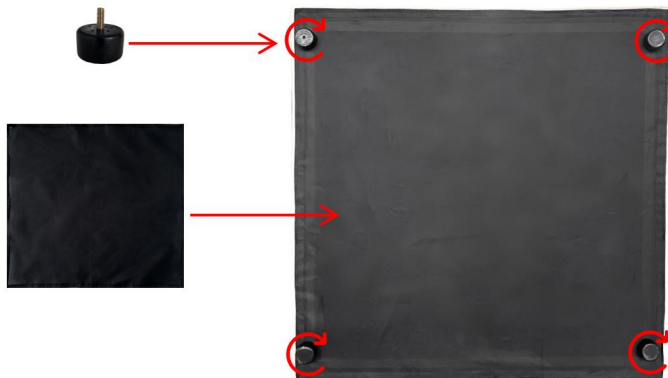


Attach EVA silent anti-slip foot pads to the sofa legs.

2 Install the Inserted rod beneath the backrest.




3

Install the cover plate over the hole.

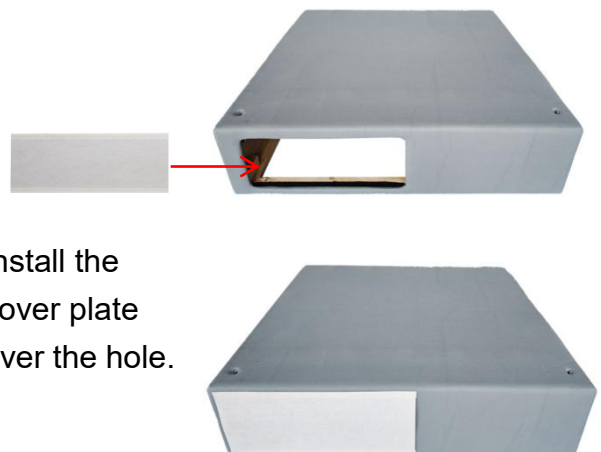


4 Insert the backrest into the seat. Note the front and back: the flat side goes at the back and should sit flush with the sofa frame once installed.

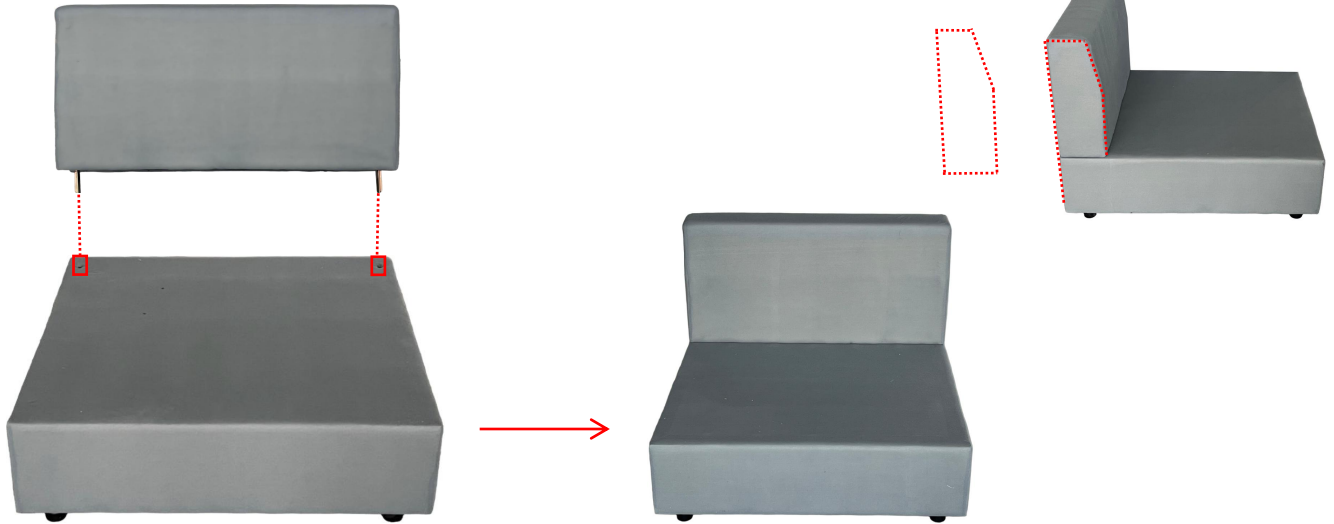

5 Put on the sofa cover. Suggestion: you'd better not remove the protective strip before finish putting the cover on.



6 Place the seat cushion and back cushion. Note: Place the side with the zipper facing backward.

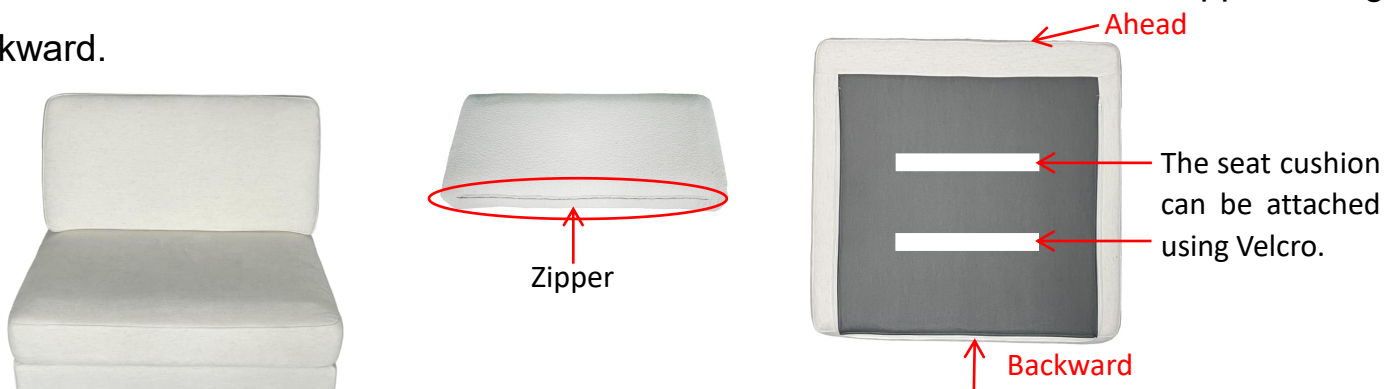

Note: The side of the grey magic cloth that is flush with the edge of the seat cushion should be facing backward.