

KIM



HALL/CLOSET



BED/BATH



KEYED ENTRY




INACTIVE

SPECIFICATIONS

DOOR PREP	Cross Bore 2-1/8" Edge Bore 1" Latch Face 1"x2-1/4"
BACKSET	Adjustable to 2-3/8" or 2-3/4" UL 2-3/4" standard 2-3/8" optional
DOOR THICKNESS	1-3/8"–1-3/4" doors standard thickness 2-1/4" doors optional on GLC101
CYLINDER	Standard SmartKey Kwikset or Weiser 5pin pin & tumbler available
FACEPLATE	1"x2-1/4" Square, radius corner and drive-in standard
STRIKES	2-1/4" full lip. Specify round corner or square corner Other options available
BOLT	1/2" throw. Nickel plated
DOOR HANDING	Specify handing only with Inactive levers
ANSI/BHMA	A156.2 Grade 3
ADA	Functions GLC 101, GLC 12 satisfies section 4.13.9 ADA requirement
UL AVAILABILITY	Meets 20 minute with Square, Radius or Drive-in latch
ASTM	All Weiser product meets ASTM E 331 water penetration testing


SPECIFICATIONS

PRODUCT DIMENSIONS

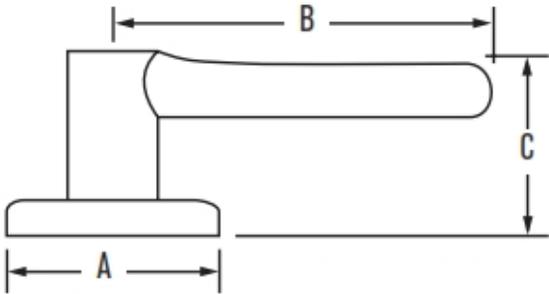


	A	B	C	C (Keyed)
Kim	2-5/8"	3-5/8"	1-15/16"	2-5/8"

6-WAY ADJUSTABLE LATCH

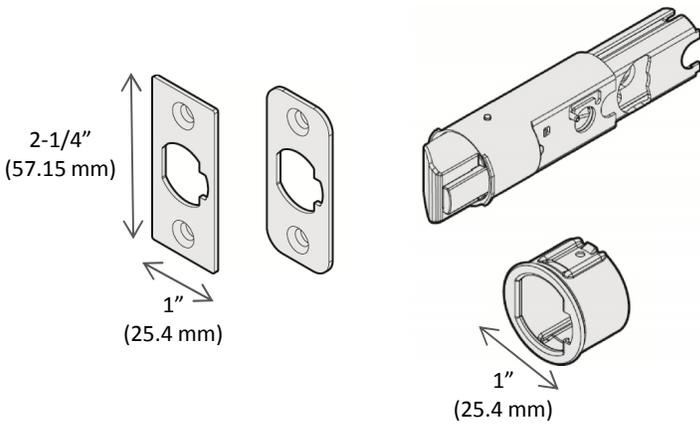

FULL LIP SQUARE CORNER

FULL LIP RADIUS CORNER

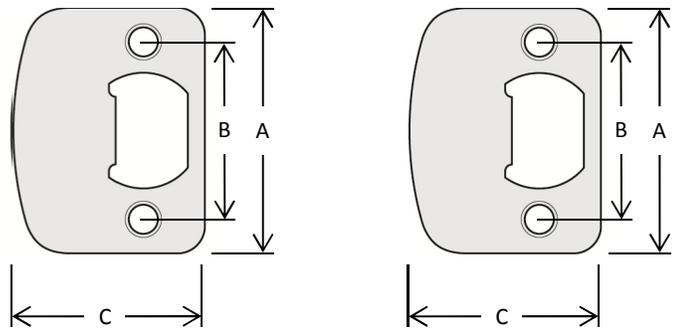

A	2-1/4" (57.15 mm)
B	1-5/8" (41.275 mm)
C	1-3/4" (44.45 mm)

PRODUCT AVAILABILITY



BRASS SATIN NICKEL POLISHED CHROME SATIN CHROME

		 20 min.	Brass	Satin Nickel	Polished Chrome	Satin Chrome
Passage	GLC101 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Privacy	GLC331 K		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Entry	GLC535 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Inactive	GLC12 K		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>