

EL99IC EL99ICA

4" Line Voltage Double Wall
IC Housing with Thermal Protector.



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

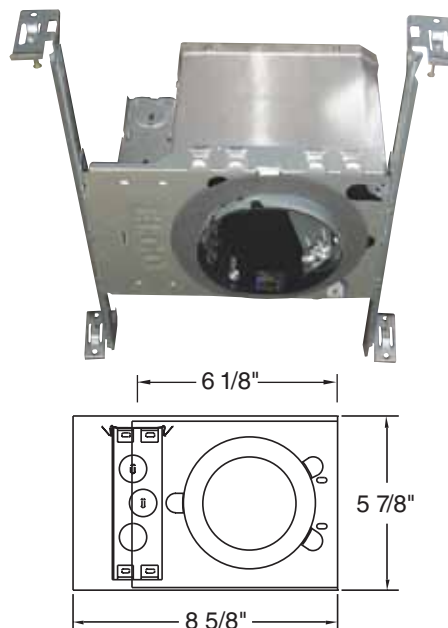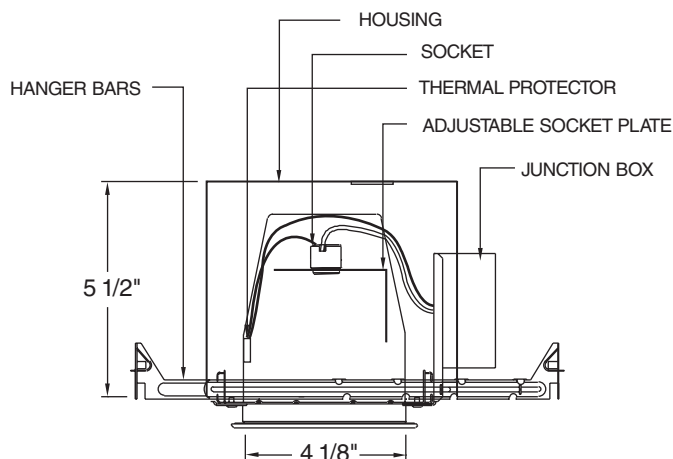

PRODUCT SPECIFICATIONS

Housing Features: For use in insulated ceilings. Integral thermal protector guards against improper lamping. Double wall aluminum construction. Housing is adjustable to accommodate up to 1 1/4" thick ceilings.

The **EL99ICA** housing meets restricted air flow requirements. (Per ASTM E-283 Standards).

Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent positioning.

Lamp: 120V, 50W Maximum.

Lamp Holder: Medium base socket.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cut-out.

EL99ICA complies with California Title 24, IECC and Washington state Energy code requirements

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. U.L. listed/C.U.L. listed: for through branch wiring, maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Hanger bars span 24" and can be repositioned 90 degrees. Housing accommodates various ceiling thickness.

Mounting Frame: Stamped galvanized steel material for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through.
- U.L. listed for direct contact with insulation.

CATALOG NUMBER

Example: EL99IC - EL993W

See trim page for variety of trims available

2042 East Vernon Avenue, Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 • www.elcolighting.com
© ELCO LIGHTING 2012 All Rights Reserved. Rev. March 2012. ELCO Lighting reserves the right to make specification and design changes without notice.

ELCO
LIGHTING

ELCO Lighting®