

### Features


- Acrylic
- Bask™ heated lumbar support with three temperature settings
- Textured bottom surface
- Drop-in installation
- 72" (1829 mm) x 42" (1067 mm) x 22" (559 mm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795
- ASME A112.19.7/CSA B45.10

### 6' DROP-IN BATH WITH BASK™ HEATED SURFACE K-1417-W1

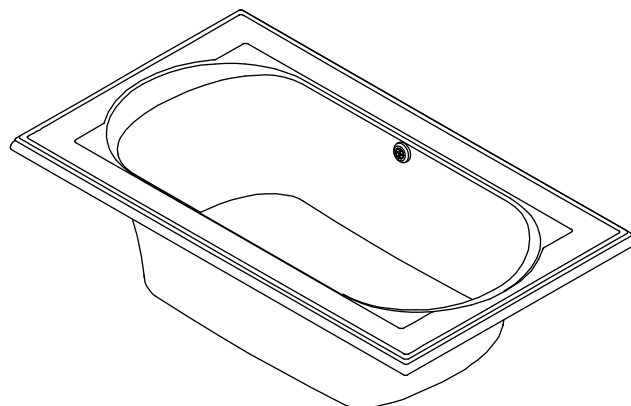

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

| Model                   | Description                              | Colors/Finishes             |                                     |                                     |
|-------------------------|------------------------------------------|-----------------------------|-------------------------------------|-------------------------------------|
| K-1417-W1               | 6' Drop-in bath with Bask heated surface | <input type="checkbox"/> 0  | <input type="checkbox"/> Other_____ |                                     |
| Recommended Accessories |                                          |                             |                                     |                                     |
| K-7161-AF               | Drain                                    | <input type="checkbox"/> CP | <input type="checkbox"/> PB         | <input type="checkbox"/> Other_____ |

### Product Specification

The acrylic drop-in bath shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Bath shall feature textured bottom surface. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall be Kohler Model K-1417-W1-\_\_\_\_\_.

# MEMOIRS®

## Technical Information

|                    |  |                                       |     |    |     |
|--------------------|--|---------------------------------------|-----|----|-----|
| Fixture*:          |  |                                       |     |    |     |
| Bathing well       |  |                                       |     |    |     |
| Basin area, bottom |  | 48" (1219 mm) x 27" (686 mm)          |     |    |     |
| Basin area, top    |  | 60" (1524 mm) x 30" (762 mm)          |     |    |     |
| Weight             |  | 86 lbs (39 kg)                        |     |    |     |
| To overflow:       |  |                                       |     |    |     |
| Water depth        |  | 16" (406 mm)                          |     |    |     |
| Capacity           |  | 94 gal (355.8 L)                      |     |    |     |
|                    |  |                                       |     |    |     |
| Drop-in cut-out    |  | 70-1/2" (1791 mm) x 40-1/2" (1029 mm) |     |    |     |
|                    |  |                                       |     |    |     |
| Heater:            |  | W                                     | V   | HZ | A   |
|                    |  | 65                                    | 120 | 60 | 1.1 |

## Installation Notes

Install this product according to the installation guide.


If installing a rim-mount faucet, make sure that there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

Floor support under this product must provide for a minimum of 43 lbs/square foot (208 kg/square meter) loading.

Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.

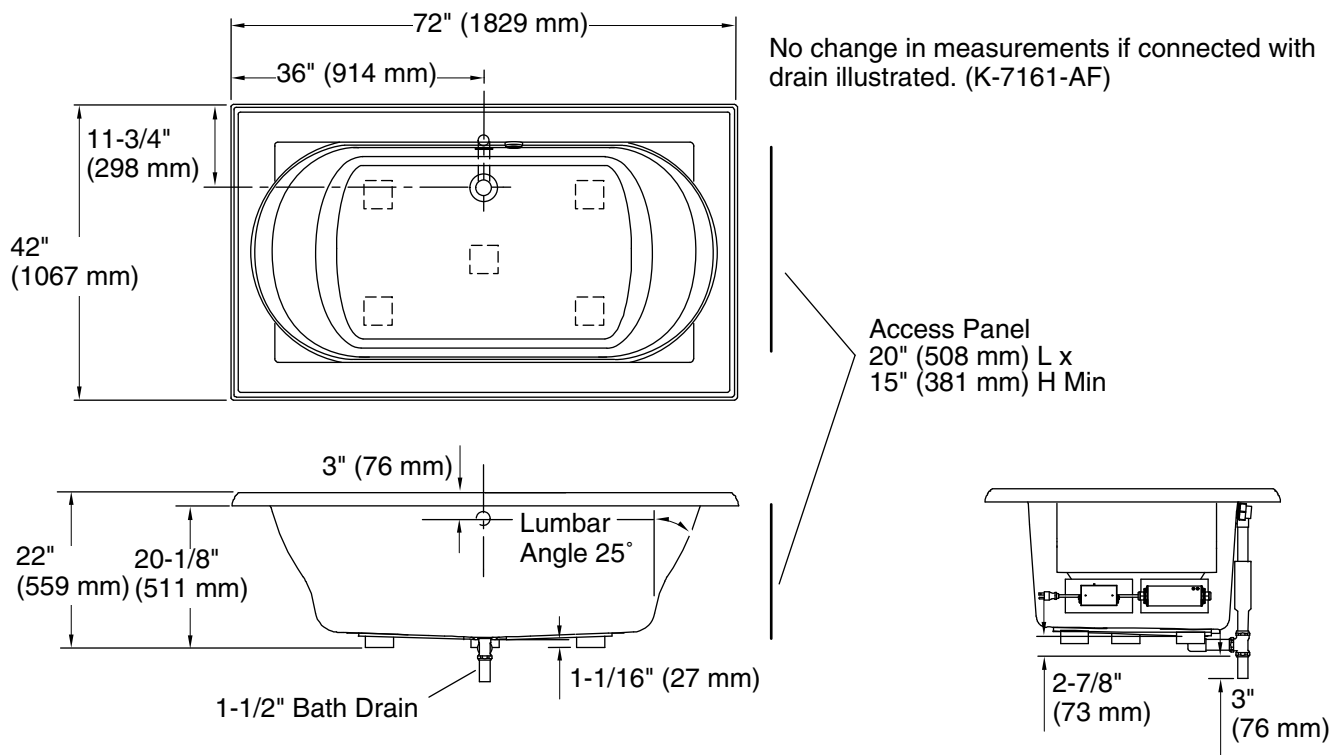

## Product Diagram

MEMOIRS® 6' DROP-IN BATH WITH BASK™ HEATED SURFACE

Page 2 of 2  
1201653-4-A

THE BOLD LOOK  
OF **KOHLER**®