


Instruction Manual

Dog Kennel With Roof

3x3x1.8m

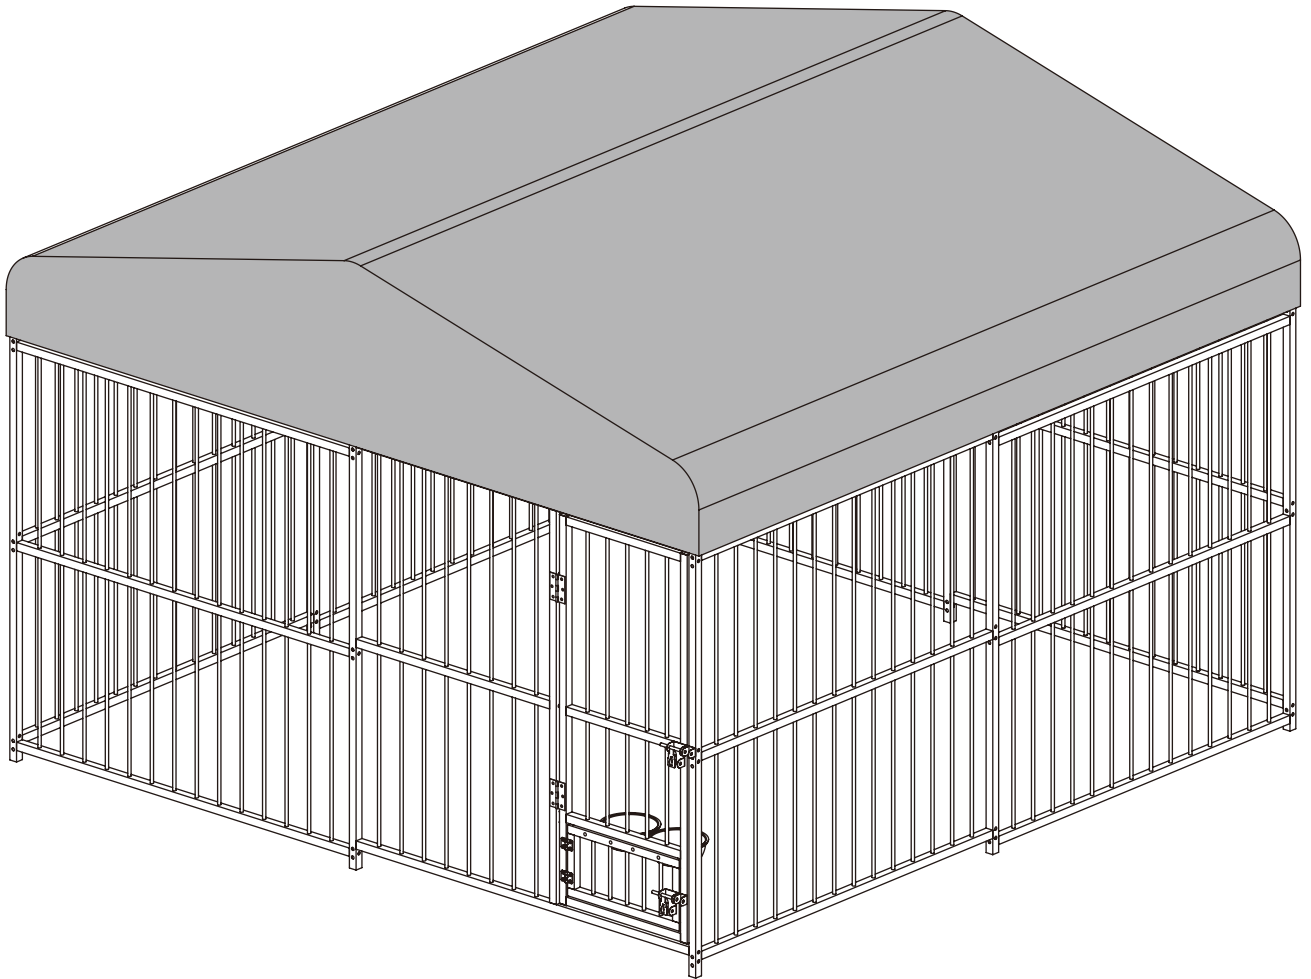


NOTE:

Please wear work gloves to assemble this item.

More partners to complete this item may be more efficient.



Tools:



x1

Part list in box 1


- 

1 x7pcs 1485mm
- 

3 x2pcs 1447.5mm
- 


6 x1pcs 847.5mm
- 


8 x2pcs 1000mm
- 

D1 x1pcs 1300mm
- 

D2 x1pcs 1300mm
- 

D3 x2pcs 490mm
- 

D4 x1pcs 490mm
- 

D x4pcs
- 


E x75pcs
- 

H x9pcs
- 

F x1pcs Roof Cover
- 

G x12pcs
- 

2 x14pcs 1447.5mm
- 

4 x7pcs 1447.5mm
- 

7 x1pcs 1080mm
- 


D5 x1pcs 1485mm
- 

9 x3pcs
- 

10 x6pcs
- 

11 x1pc 490mm
- 

13 x1pc 470mm
- 


15 x2pcs
- 


12 x1pc 200mm
- 

14 x1pc 470mm
- 

16 x2pcs

Part list in box 2

- 

A x106pcs 1370mm
- 


B x5pcs 970mm
- 

J x5pcs 245mm

Step 1

Install the base and column. Insert the D5 tube first, with the lock hole facing outwards, then install the other #1 tubes, which are inserted in the same direction as the D5 tube.


NOTE: The thin end faces upwards

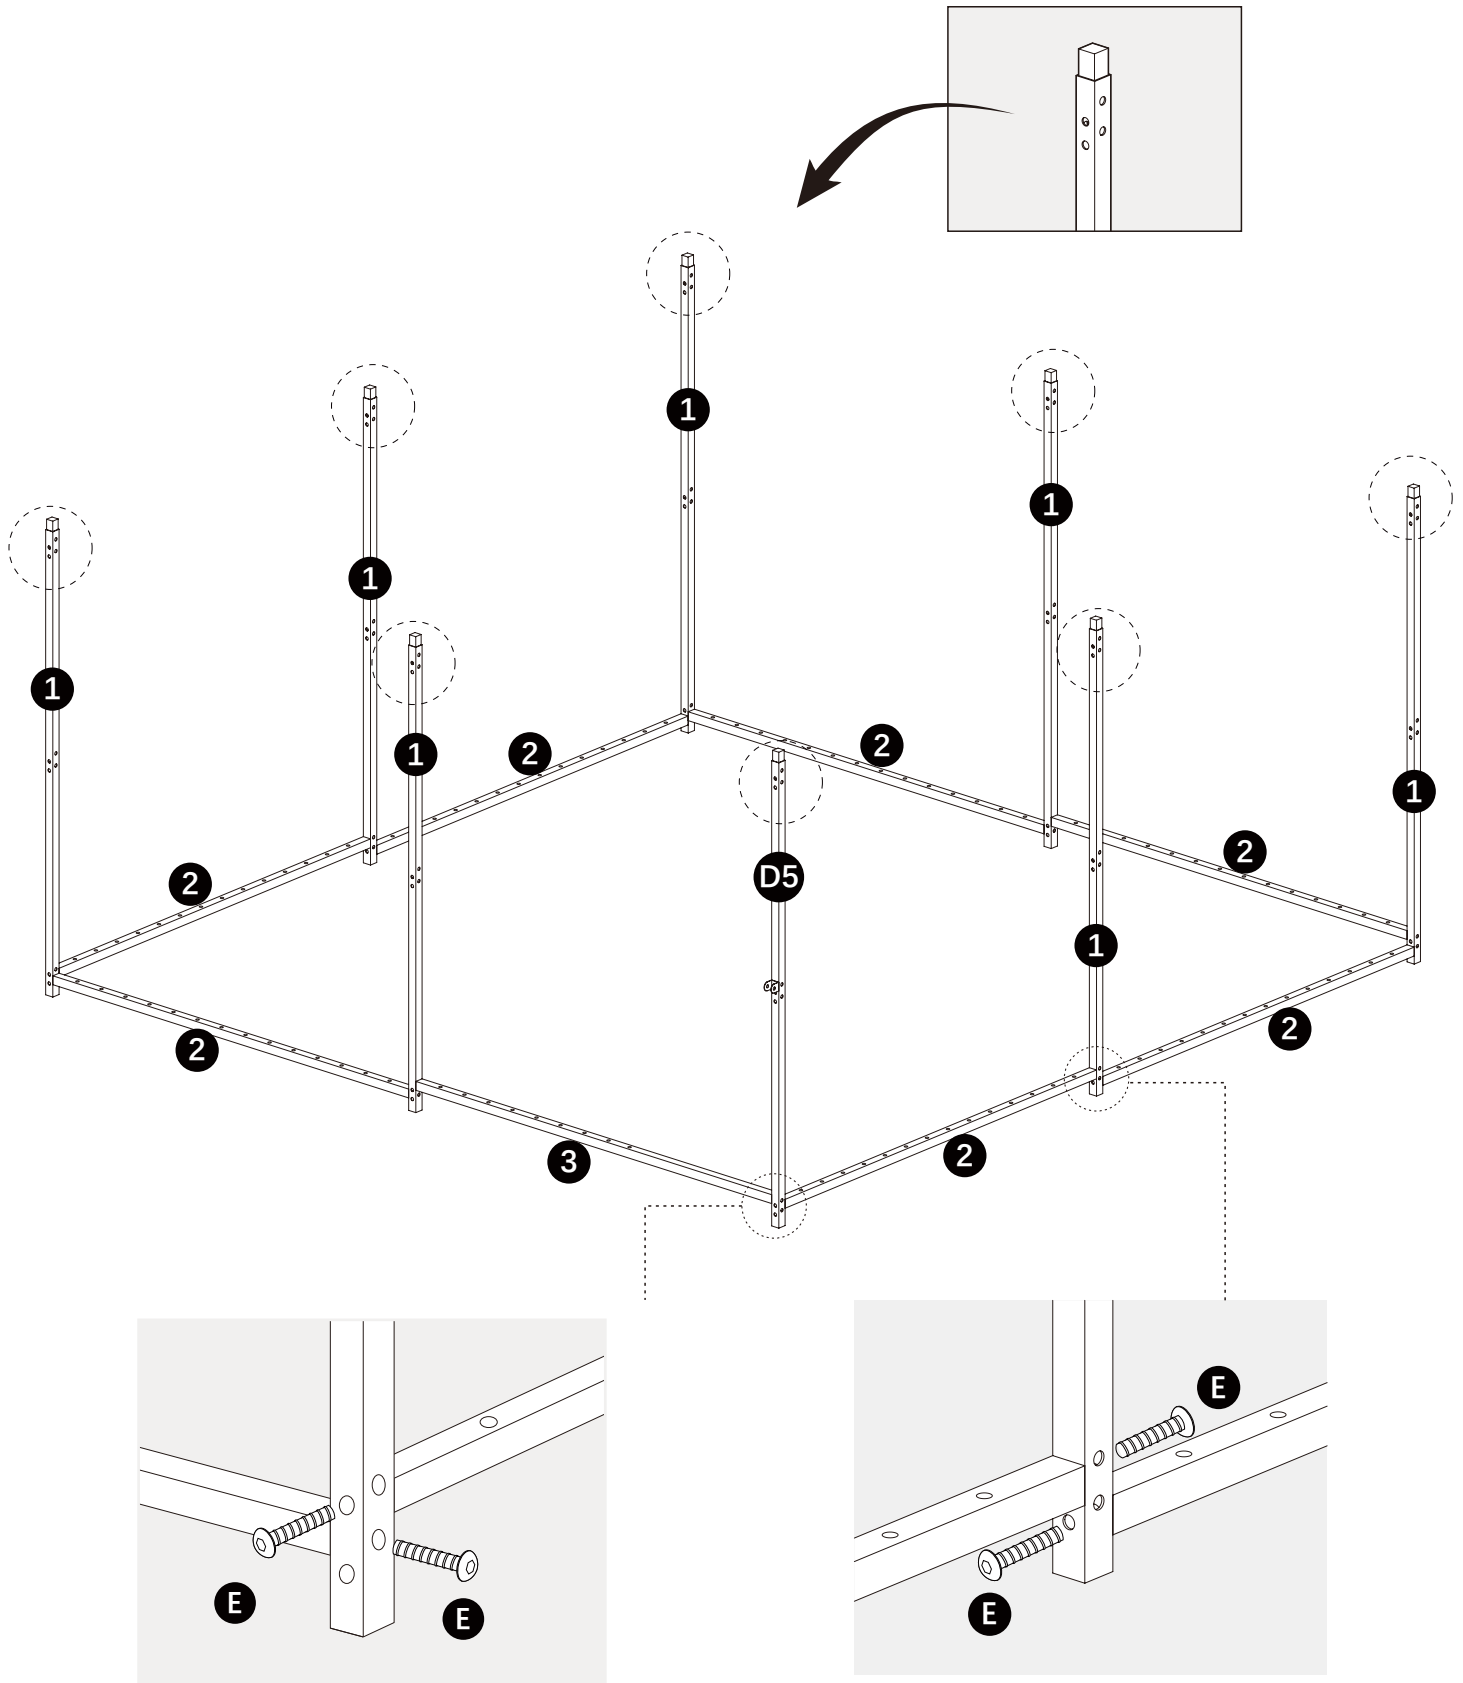

***Note:** Please attach the NO.3 tube first, and the NO.3 tube must be under NO.2 tube as bellow.


Step 2

Install the middle cross bars.

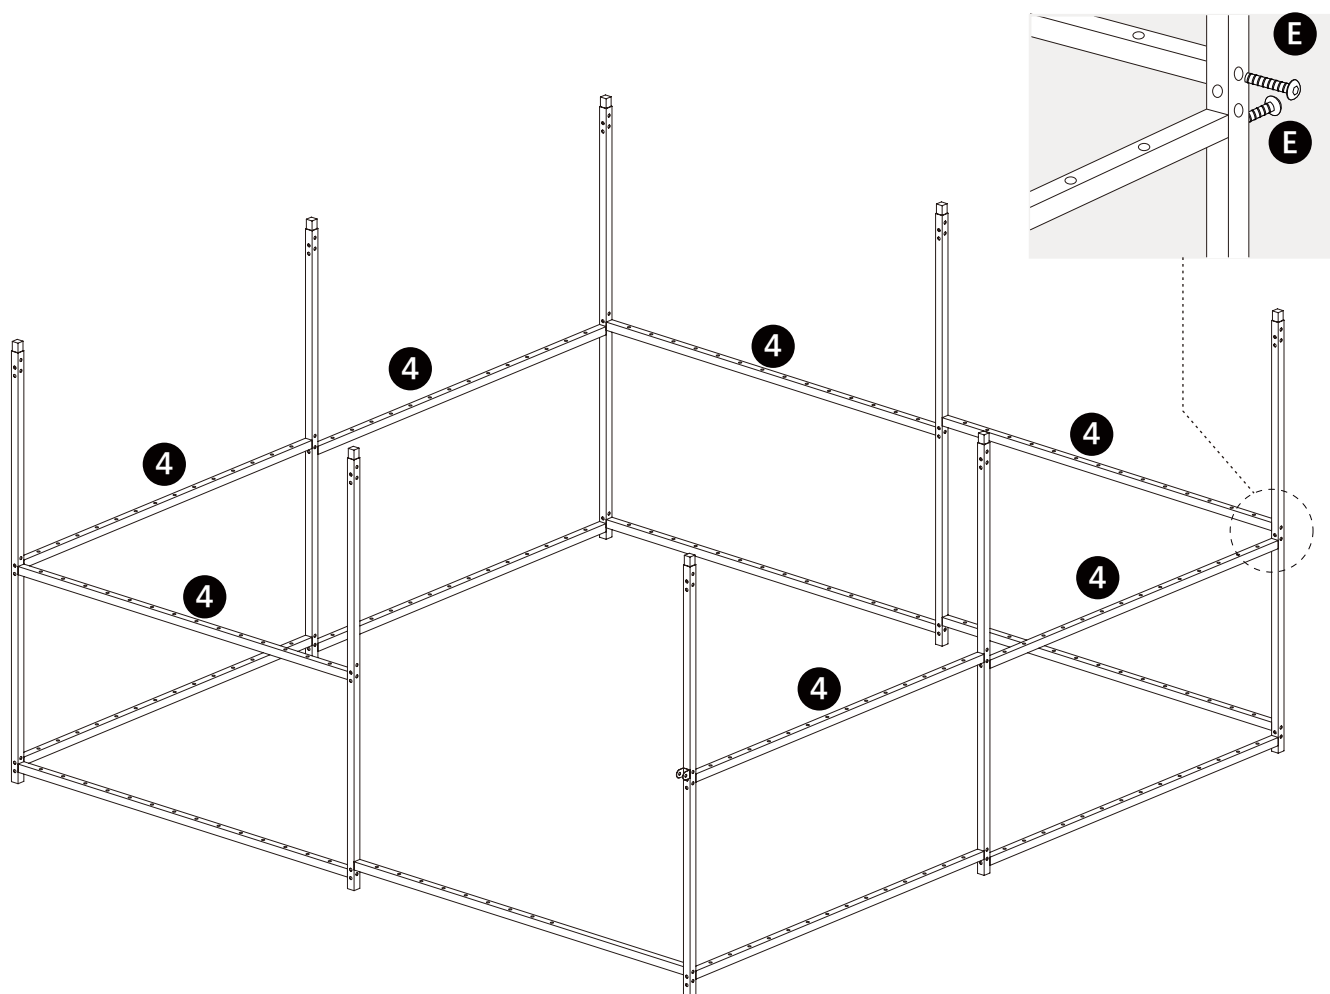

Step 3


Door fixing.

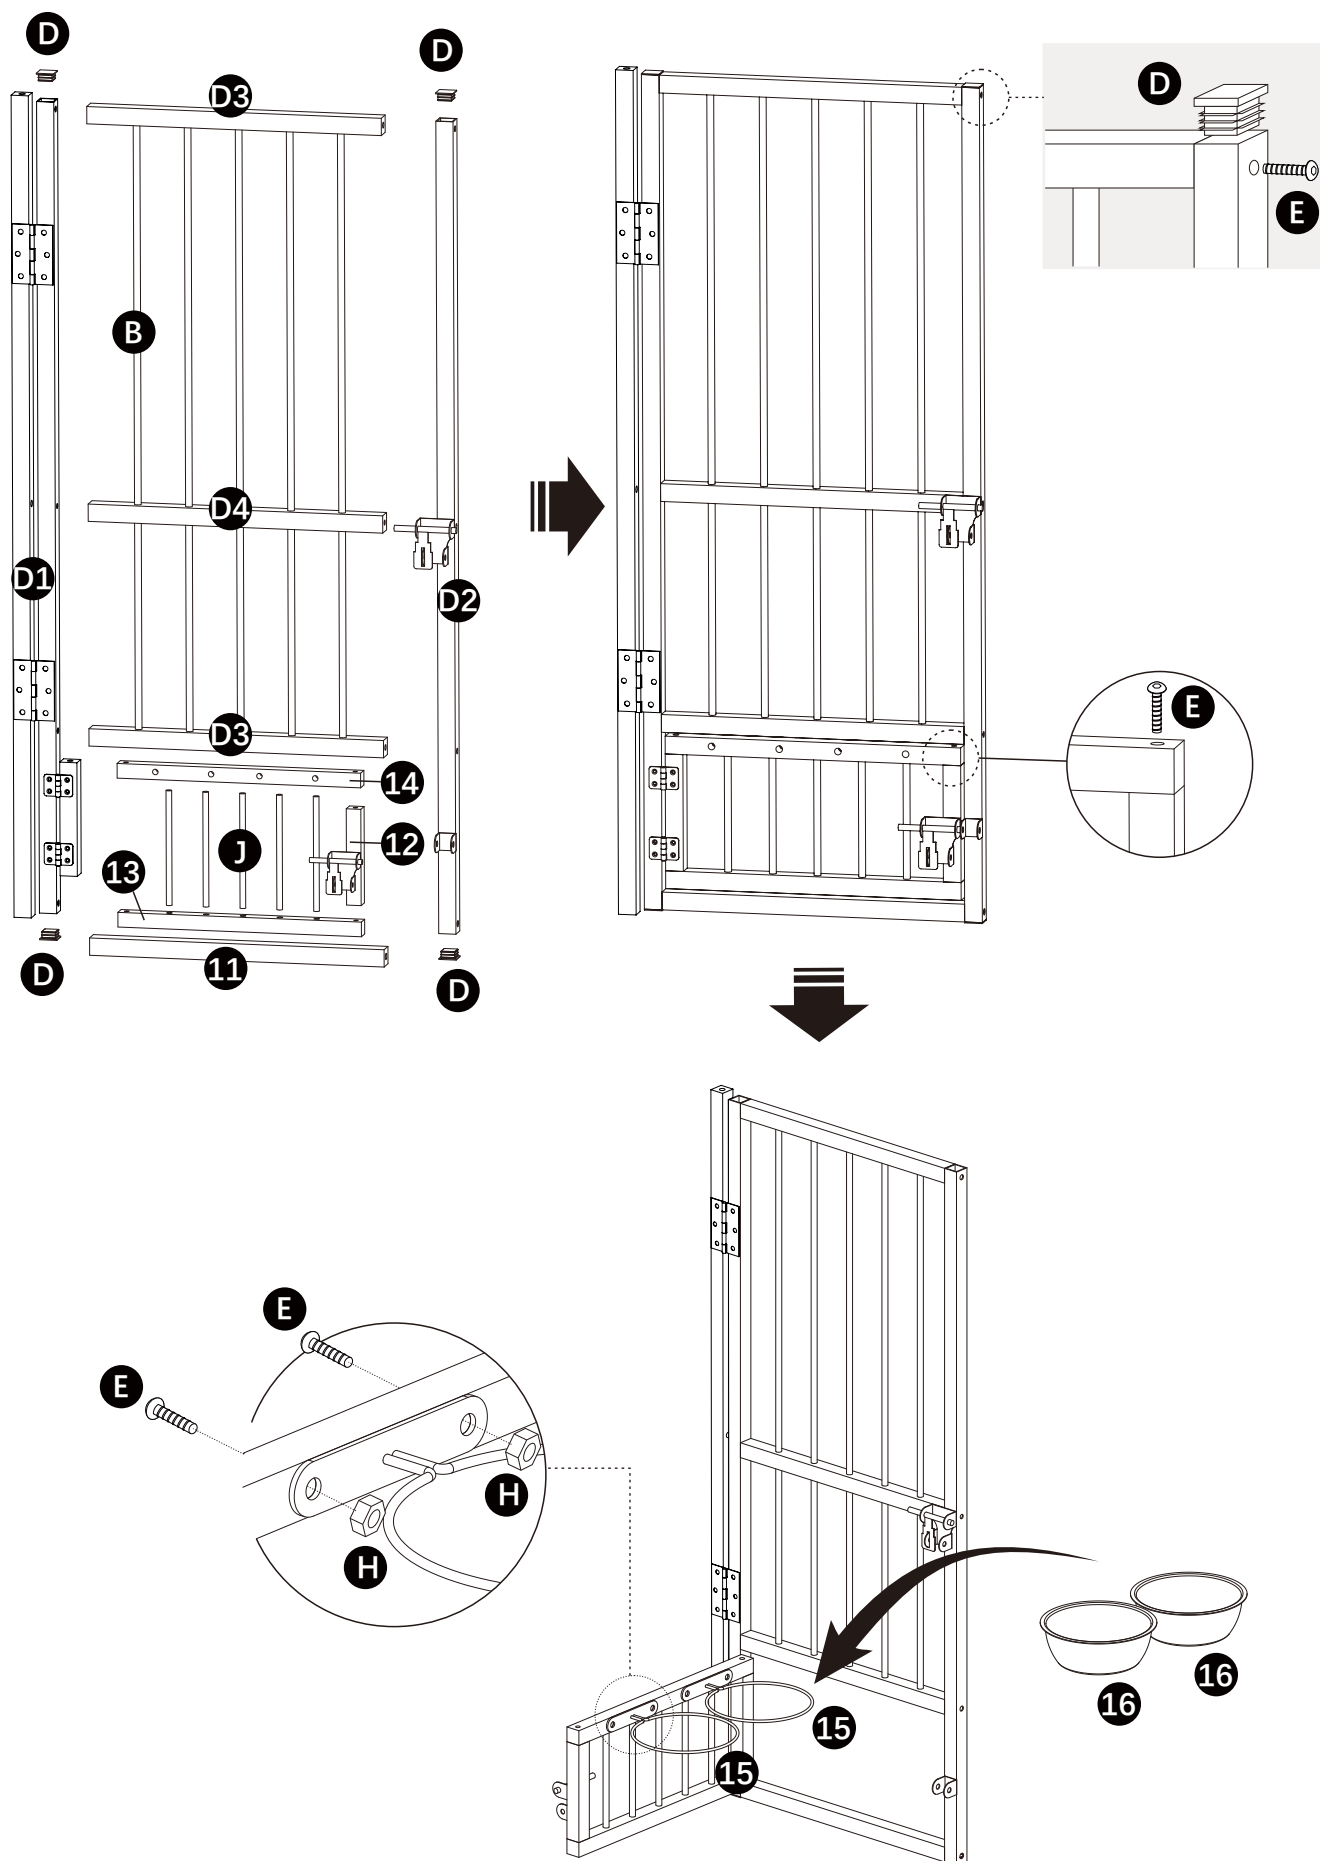

Step 4



Install facade pipes.

Install the pipe No.5 and “D1”, fasten the pipes with screw “E”.

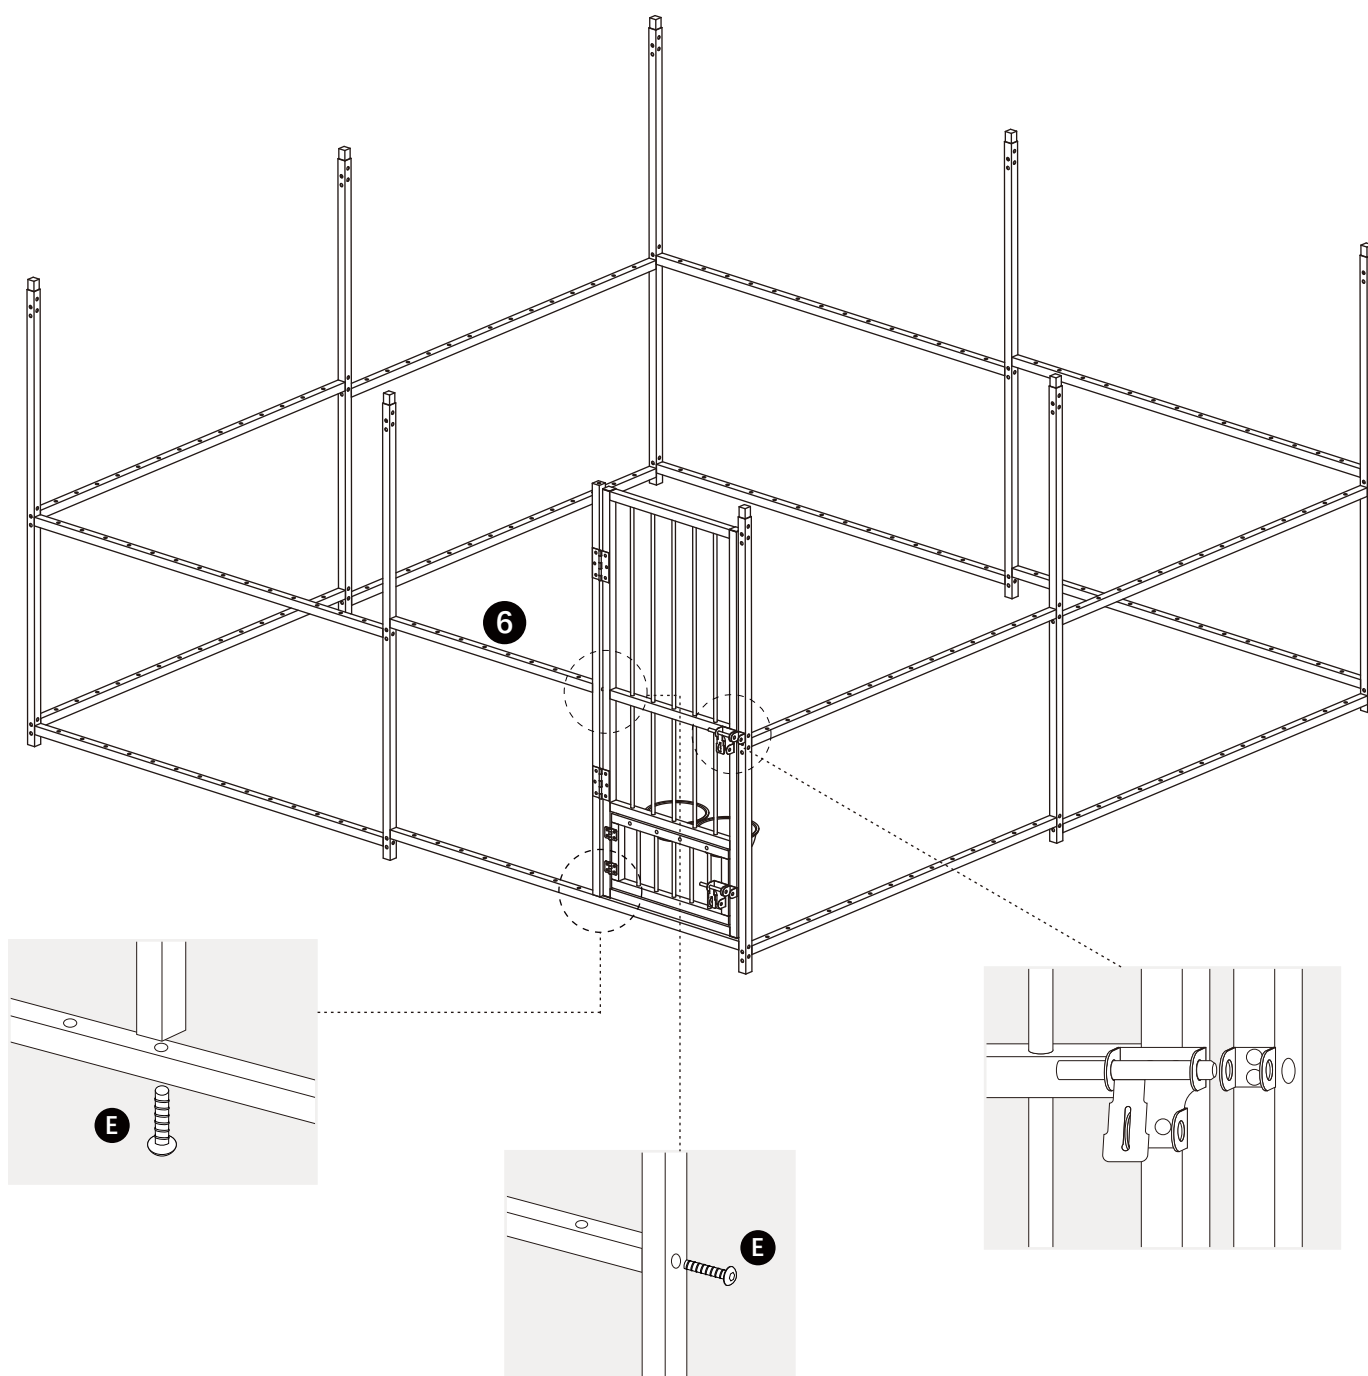


Step 5

Insert all the circular tube "A" as a grid.

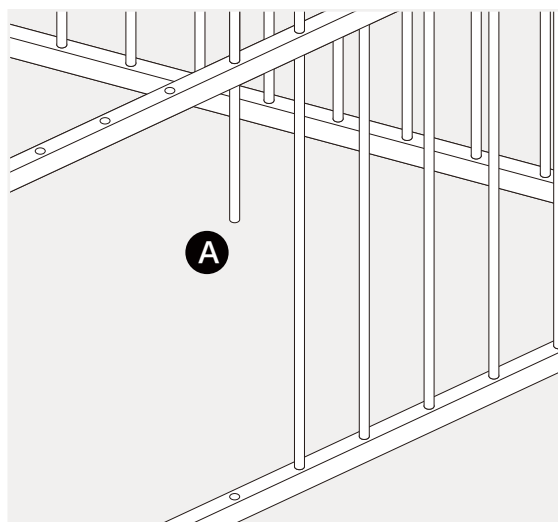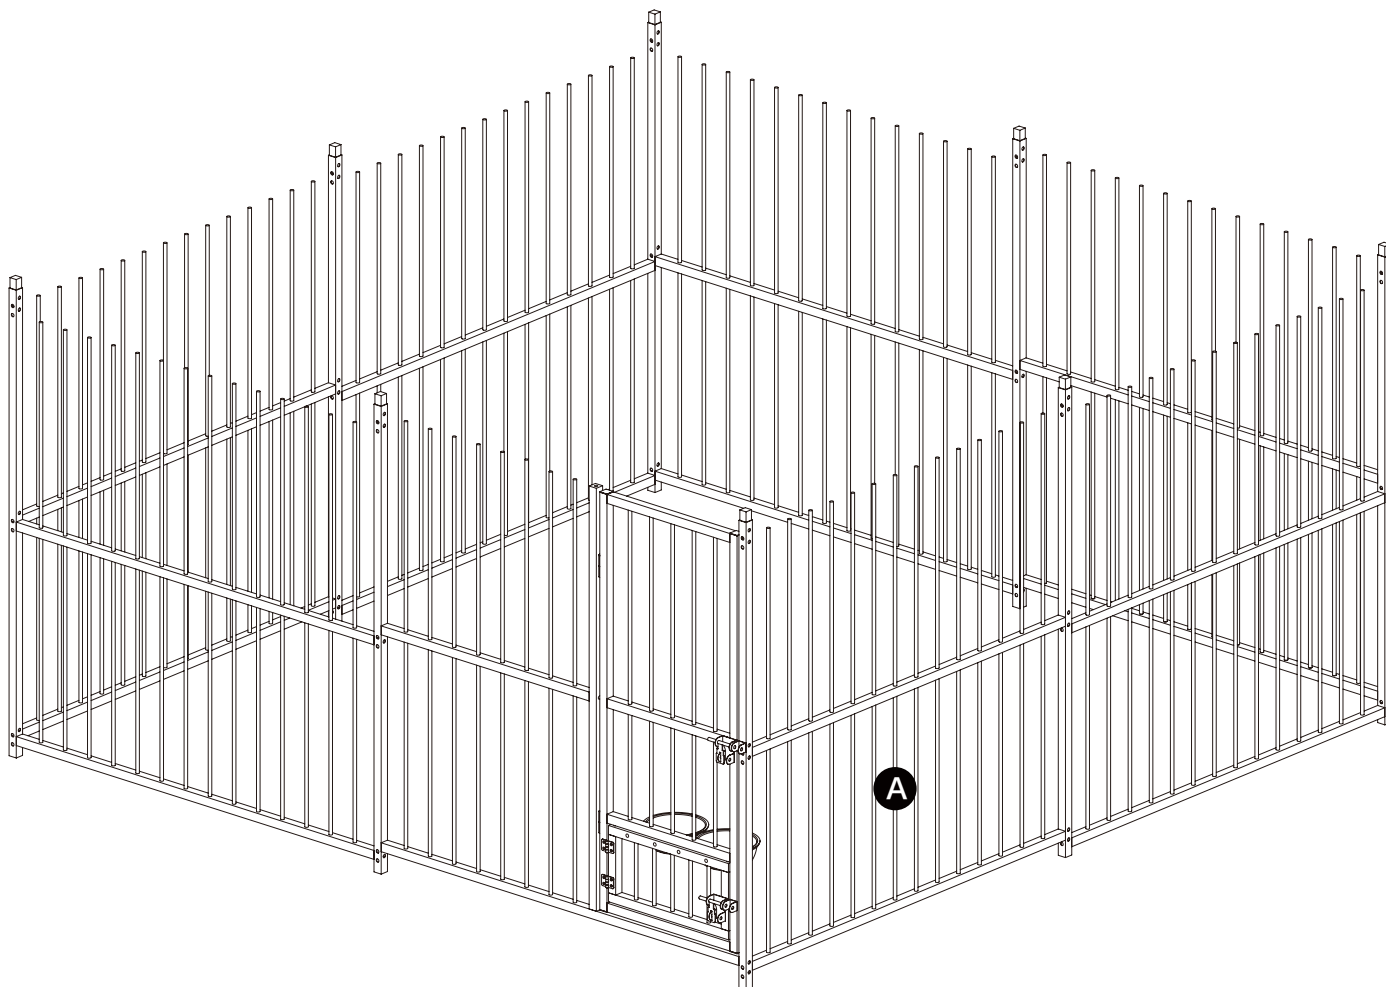


Step 6

Install the top beam pipe.

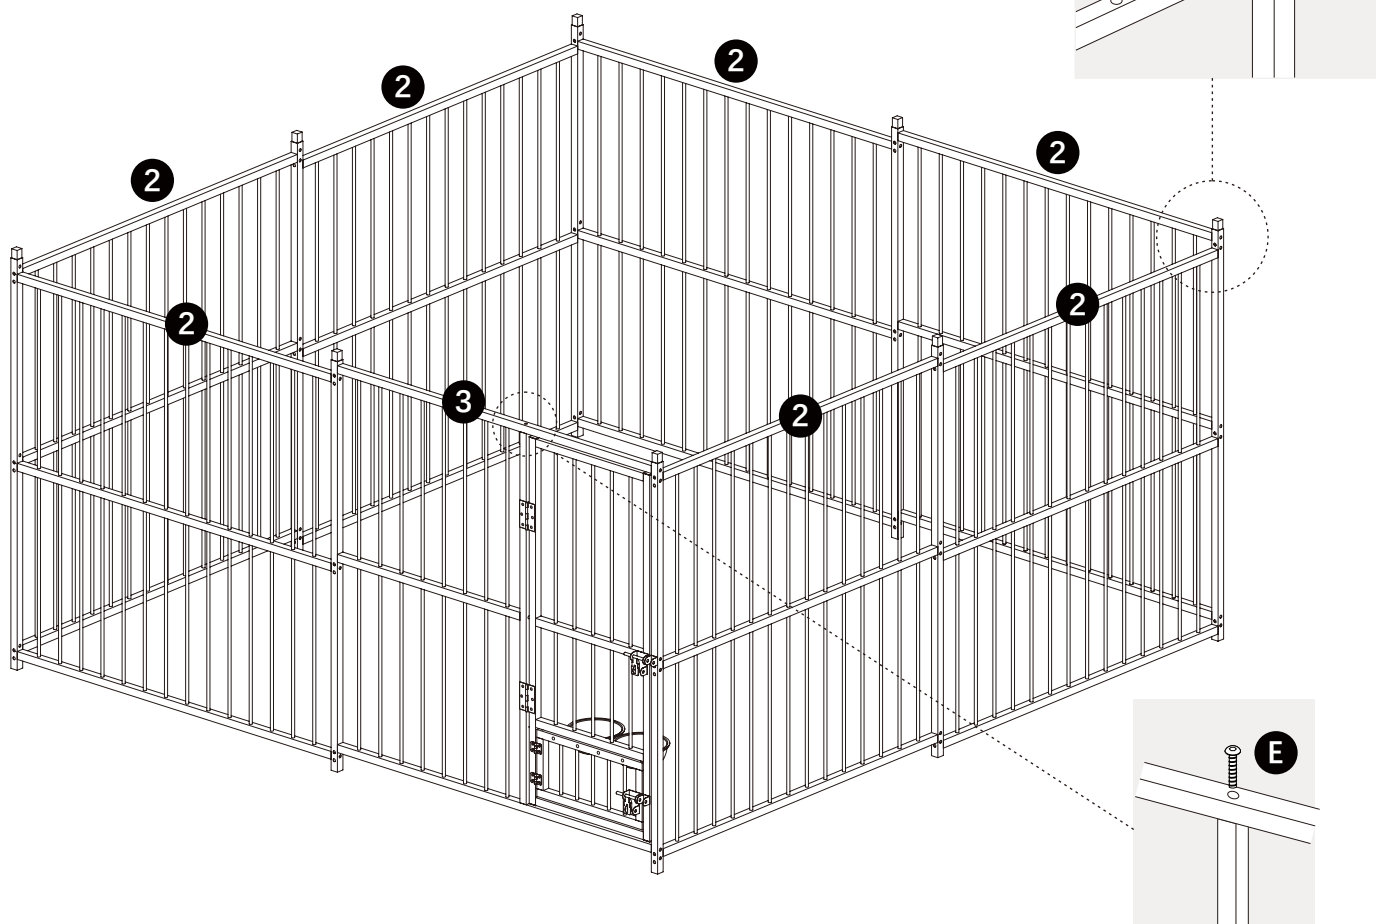


Step 7

Insert tubes #9 and #10 into the corresponding standing tubes firstly, then connect the #9 and #10 tubes in the middle.

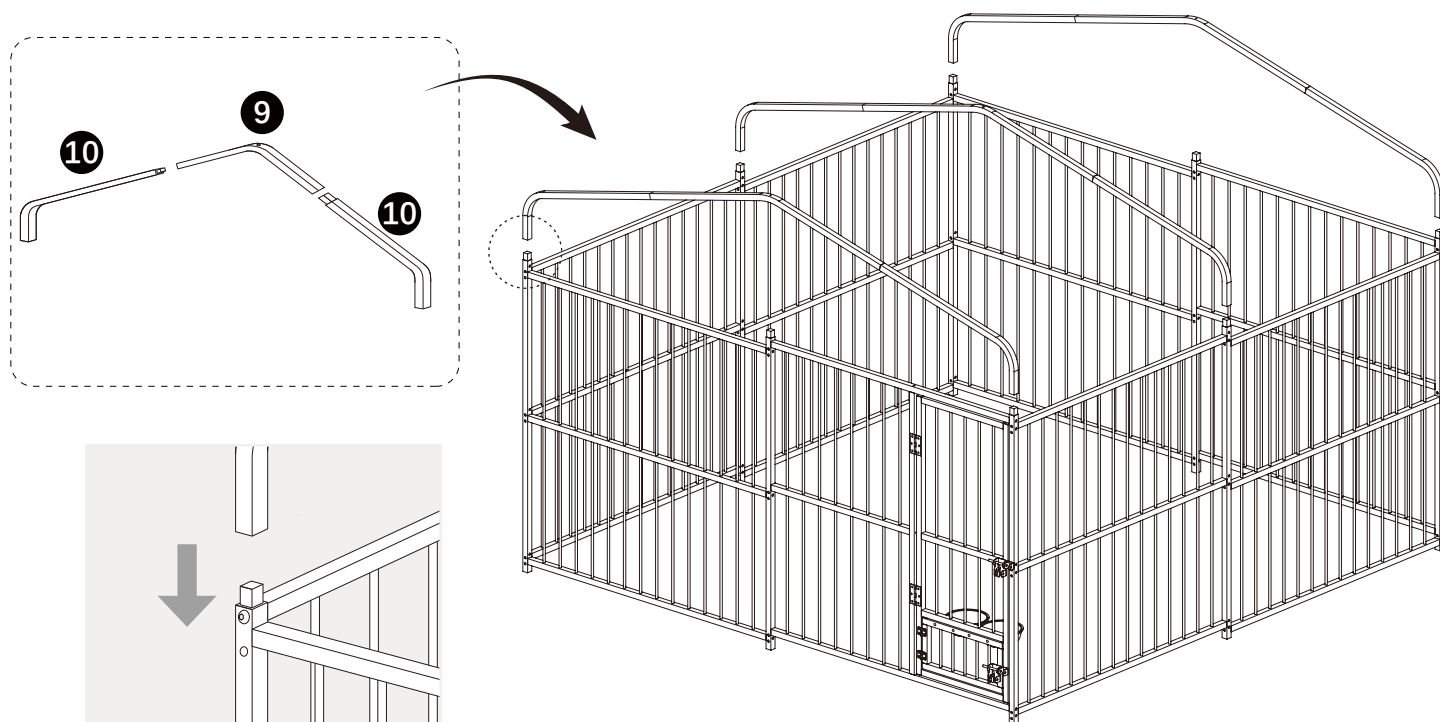

Step 8

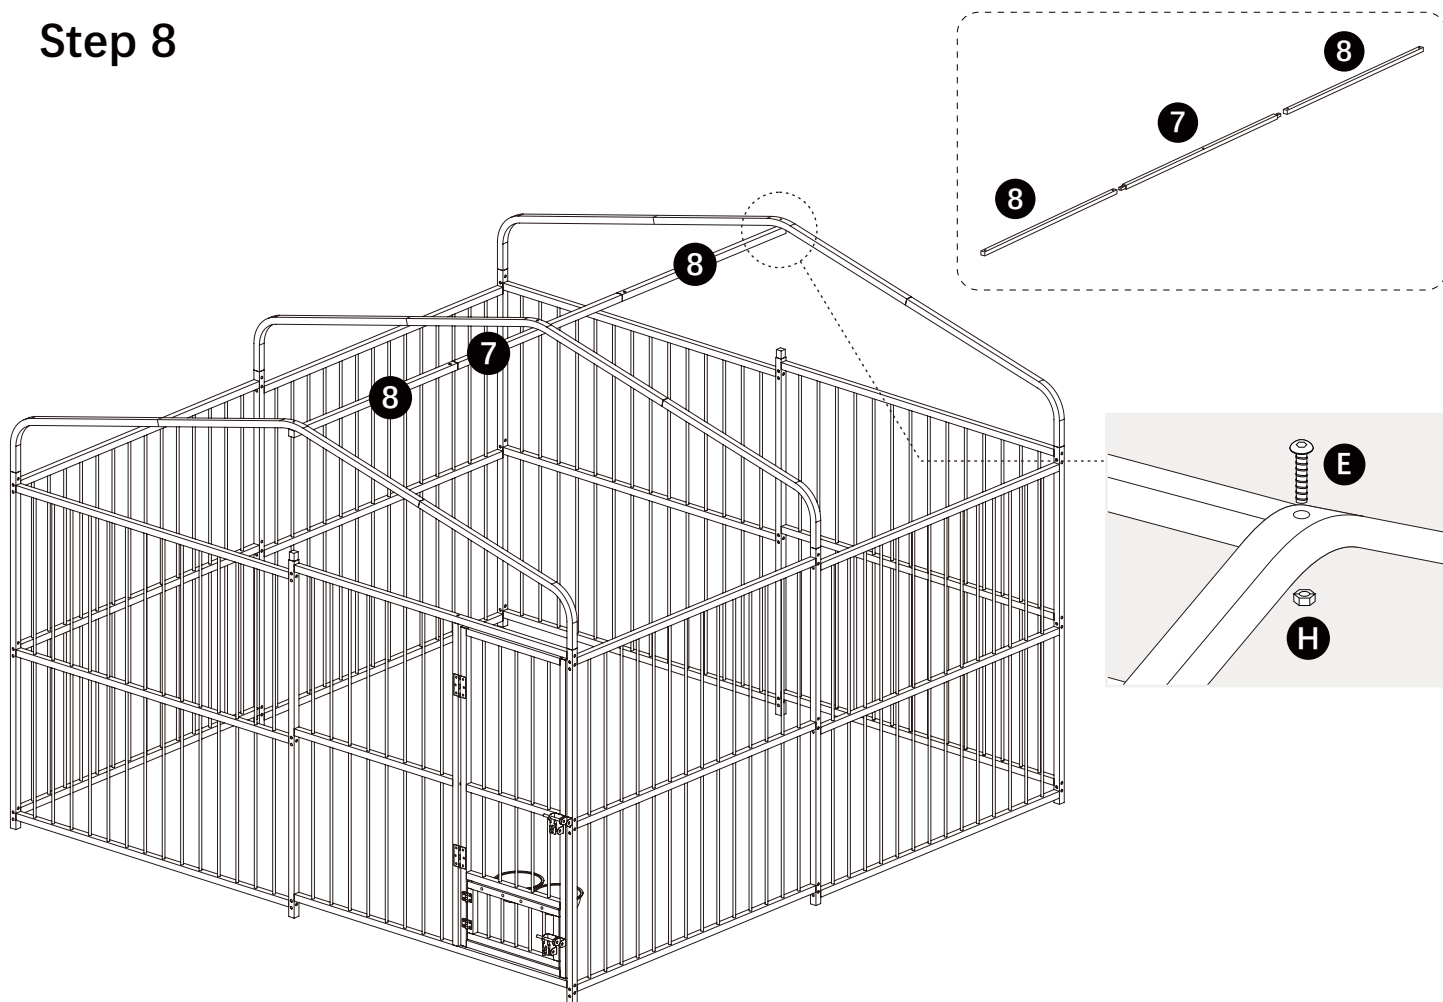

Step 9

Cover the roof fabric.

