



Please consult your electrician for hanging fixture and wiring.

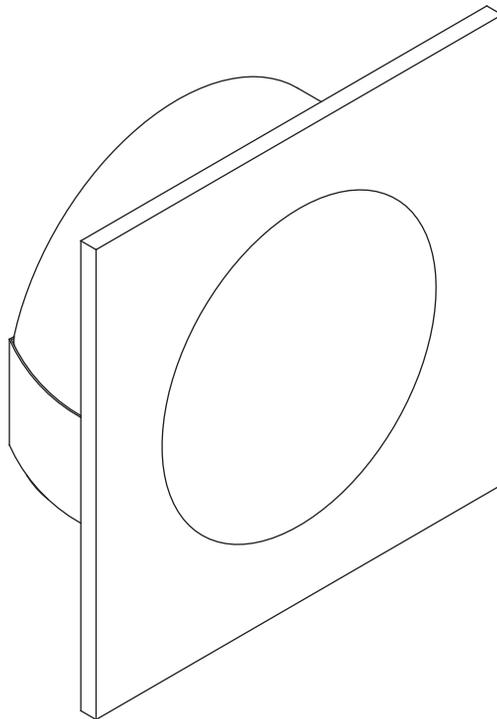


To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant. Leave a small gap at the bottom to allow moisture to exit.


**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation



(A)  
Driver




(B)  
Wire Nuts (x2)




(C)  
Item Number:5800  
Outlet Box(not incl.)

Locate all hardware & components before discarding packaging

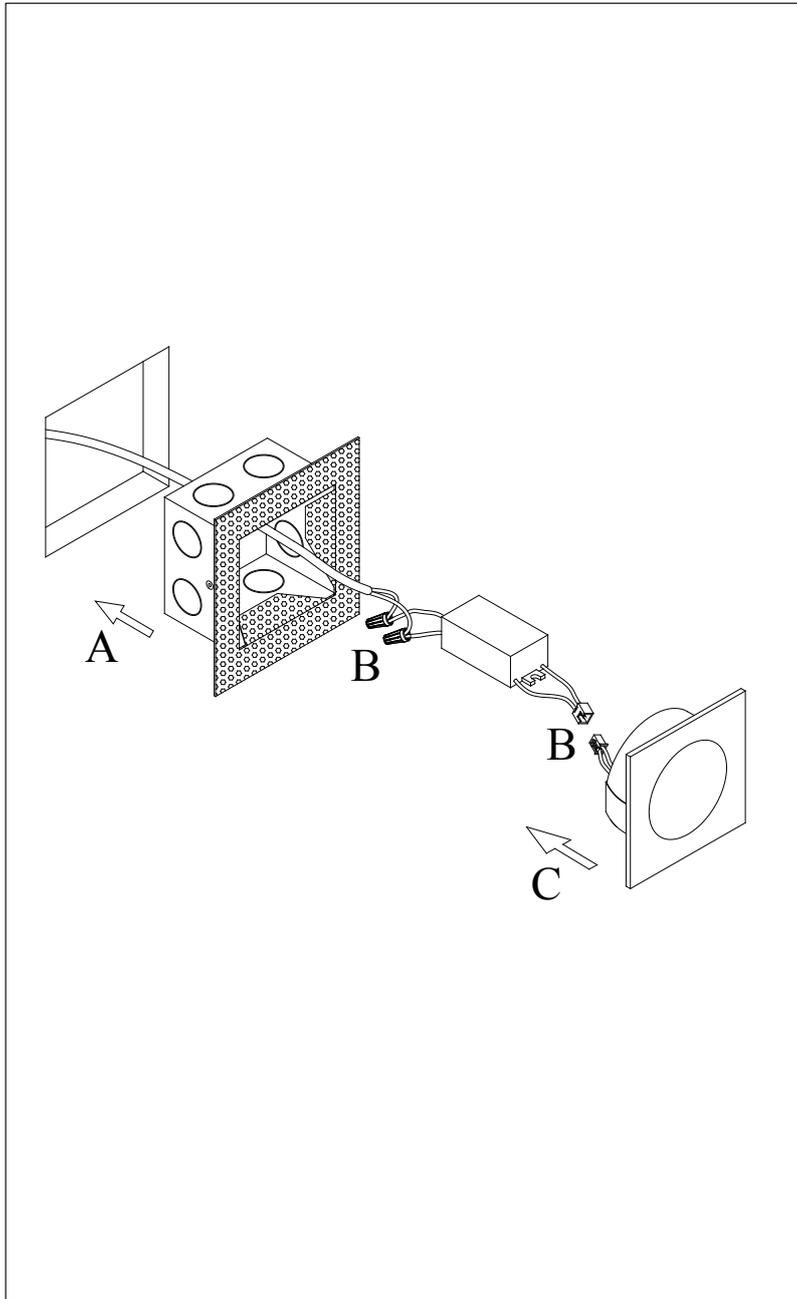


1.)

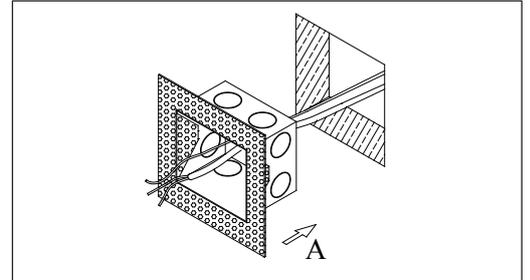


Step.1: Fix the outlet box to the hole.

2.)

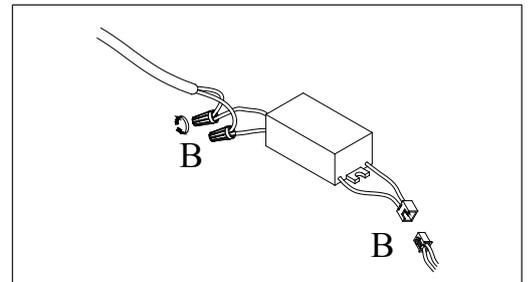

Step.2: Connect step light to driver provided.  
Wire driver wires to low voltage supply wires.

3.)

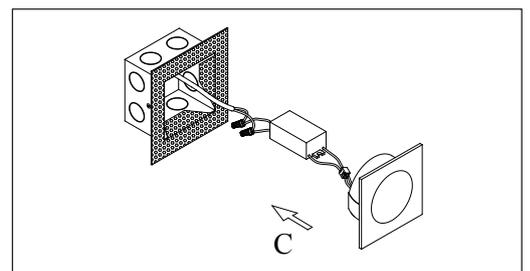

Step.3: Caulk around the housing with silicone sealant to prevent water intrusion.  
Leave a gap at the bottom to let moisture escape. Then install fixture to housing.

**Cleaning & Care:**

Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.