


# L I G H T I N G

## Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



### Care and Cleaning









To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


### Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
<b>A</b>	Mounting bar		<b>1X</b>	<b>D</b>	Shade		<b>1X</b>
<b>A1</b>	Mounting screw		<b>2X</b>	<b>E</b>	Socket Ring		<b>1X</b>
<b>B</b>	Lampbody		<b>1X</b>	<b>F</b>	Bracket screw		<b>2X</b>
<b>C</b>	Bulb		<b>1X</b>	<b>G</b>	Wire nut		<b>3X</b>

# Installation


## Step 1

Unpack all parts from cartons carefully  
Installing the mounting bar(A) with screws(A1) to the outlet box

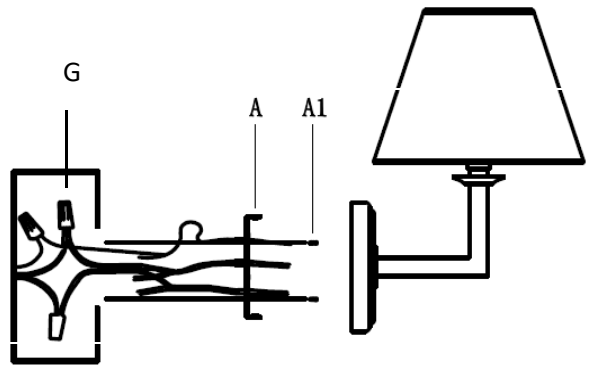


## Step 2 Wire connection

Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear, Brown, Gold or Black without Tracer(colored stripes)	Clear, Brwn, Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor




\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



## Step 3

Orient the wall canopy to tighten lampbody to the wall with bracket screw(F) by screwdriver.  
Place the shade (D) on the lamp holder, and secure it with socket ring (E)  
Install bulbs (C). Be sure to use bulb with wattage no greater than specified on this fixture

**PLEASE USE TYPE "B" BULB MAX 40-WATT OR CFL MAX 13-WATT OR LED MAX 9-WATT  
THERE ARE 1 X LED 4W BULB IN THE BOX.**

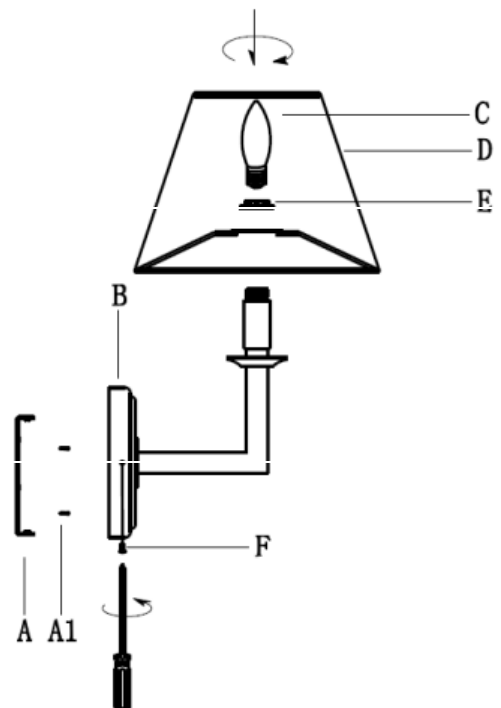

## Step 4

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP