




EcoSeat S102

Non-Electric Bidet Toilet Seat

Models: S102-EW, S102-RW

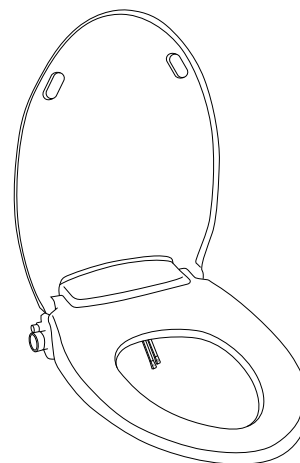

Features

Dual, Self-Cleaning, Retractable Nozzles
Separate Front and Rear Washes
Fully Adjustable Water Temperature and Pressure
Easy-Turn Knob for Pressure Control
Quick-Release Button for Easy Cleaning
Gentle-Close Seat and Lid
All Parts Included for Standard Installation
No Batteries or Electricity Required
Simple, DIY Installation
1-Year Limited Warranty

Technical Specifications

Dimensions (L x W x H)	Elongated: 20.03" x 14.39" x 2.55" (50.88 cm x 35.55 cm x 6.45 cm) Round: 18.47" x 14.34" x 2.55" (46.91 cm x 36.42 cm x 6.45 cm)
Product Thickness	Elongated: 2.55" (6.45 cm) Round: 2.55" (6.45 cm)
Weight	Elongated: 4.6 lbs (2.1 kg) Round: 4.5 lbs (2 kg)
Hot Water Flex Tubing Length	81" (205.74 cm)
Hot Water Flex Tubing Rating	Max burst rating: 156.2 psi (1.07 MPa) Max temperature rating: 212°F (100°C)
Supply Water Pressure	20 psi–87 psi (0.14 MPa–0.6 MPa)
Incoming Water Temperature Range	35°F–100°F (1.67°C–37.78°C)
Flow Rate	Rear Wash: 0.23 gal/min–0.53 gal/min (0.872 L/min–1.994 L/min) Front wash: 0.3 gal/min–0.58 gal/min (1.117 L/min–2.206 L/min)
Seat Weight Limit	330 lbs (150 kg)
Lid Weight Limit	331 lbs (150 kg)
Internal Valve Material	Ceramic and brass
Bidet Hose Length	27.5" (69.9 cm)
Bidet Hose Fitting/Connection Size	3/8" x 3/8"
Cold Water T-Valve Connection Size	7/8" x 7/8" x 3/8"
Hot Water T-Valve Connection Size	3/8" x 3/8" x 3/8"

NOTE: The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

For questions and additional resources, contact:

Brondell Customer Support 1-888-542-3355

www.brondell.com/support


Brondell, Inc. PO Box 470085 San Francisco, CA 94147 | brondell.com

Brondell®


Get the right fit.

Use this guide to help ensure the perfect fit.


Elongated Seat
Measurement




Minimum Bolt
Hole Distance




Distance between
Bolt Holes




Elongated Top View

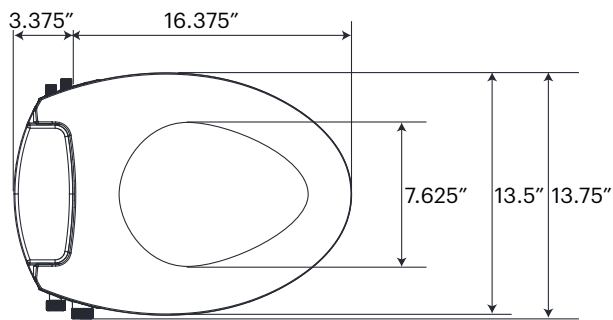

Round Top View

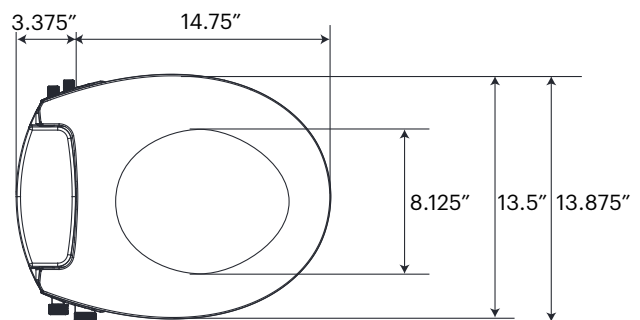

Required Distance Between Mounting Holes

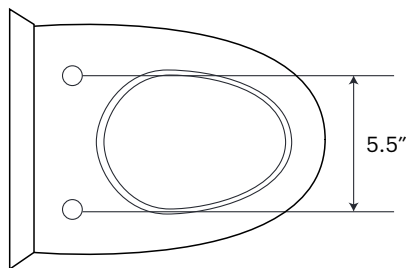

For questions and additional resources, contact:

Brondell Customer Support 1-888-542-3355

www.brondell.com/support

Brondell, Inc. PO Box 470085 San Francisco, CA 94147 | brondell.com

#26S102_0605