














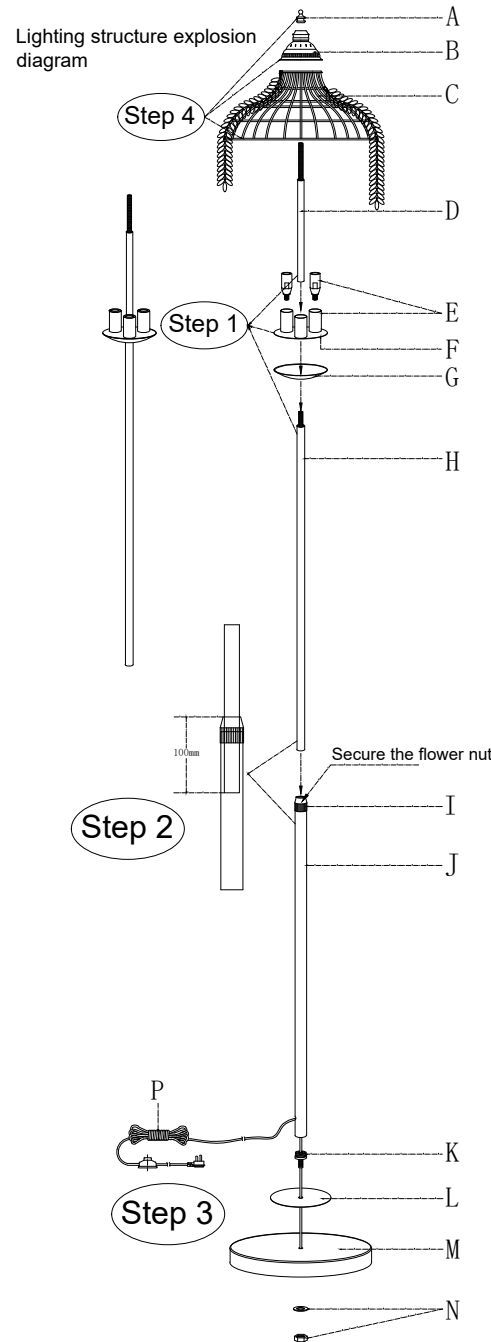



# Parts & Hardware Product Model :L6109/400 floor lamp

## Included:

Picture	Description	Qty	Check list
	Crown beauty	1	A
	Ø100 perforated cover	1	B
	Ø370*170mm Rack grape lamp shade	1	C
	Ø16*250 inner teeth rod	1	D
	Ø30*50 light cup With E12 lamp holder	3	E
	Ø100 round pieces	1	F
	Ø100 flying saucer	1	G
	Ø19*800 inner teeth rod	1	H
	Flower branch fastener	1	I
	Ø28*800 inner teeth rod	1	J
	Ø28 single connector	1	K
	Ø150 round pieces	1	L
	Ø350*35 marble lamp holder	1	M
	Ø145*130 iron wire light holder	1	N
	Ø145*130 iron wire light holder	1	P



L6109/400 floor lamp

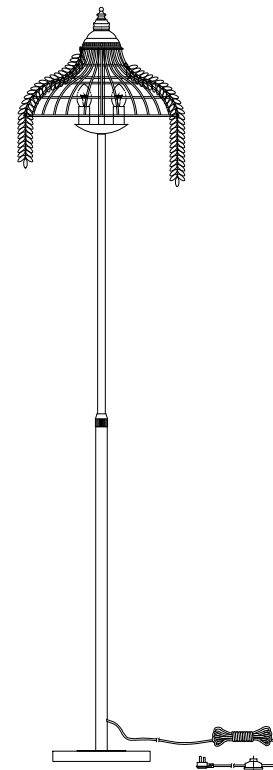

## Installation procedure

- Carefully disassemble and identify each part to ensure that you are ready  
To install everything, place each part on a clean flat surface, such as a table  
Sofa or floor.
- Cut off the main power supply to the fuse box or circuit breaker in the house or building.
- Installation steps (as prompted on the left)  
Step 1: (Install and connect the D-E-F-G-H) accessories.  
Step 2: Follow the instructions on the left to install.  
Step 3: Connect the marble lamp holder to install and tighten.  
Step 4: Install and tighten the shelf crystal cover as prompted.
- Install the light source, connect the power supply, step on the switch on the switch line to test the light.  
Save these instructions for future use.  
If the lights don't work, you can contact our customer service team  
Solve the problem  
Five: maintenance methods  
Clean the water with a soft dry cloth or an electrostatic duster  
Avoid using harsh chemicals and abrasives to clean the fixture and smooth the surface  
Deal.  
Six: Use safety precautions  
Your light is in the water, which will damage the wiring.  
Seven: after-sales questions can be contacted on the platform order page  
We hope you like your new lighting as much as you like it, and if your project meets or exceeds your expectations, we would be honored if you write us a review, sharing your experience can help others and other customers understand your ideas. To your support like this we make money and we really appreciate it.  
Eight: After installation, the finger mold and sweat trace left on the metal and crystal surface of the lamp body can be wiped with a soft dry cloth or an electrostatic duster.

### Step 2

Height adjustment Instructions (recommended)  
Loosen the fixed flower nut counterclockwise first  
Then adjust the upper rod down 100mm and then fix it  
The flower branches can be tightened clockwise, of course  
Can be adjusted to your preferred height.