



ASSEMBLY INSTRUCTIONS

PARTS LIST


①



②



③




Part	Description	Qty
1	Seat Frame	1
2	Left Leg	1
3	Right Leg	1

HARDWARE LIST


Part	Diagram	Description	Qty
A		Bolt M8*45MM	6
B		Bolt M8*55MM	2
C		Spring Washer	6
D		Flat Washer	6
E		Allen Key	1
F		Plastic cap	2

STEP 1

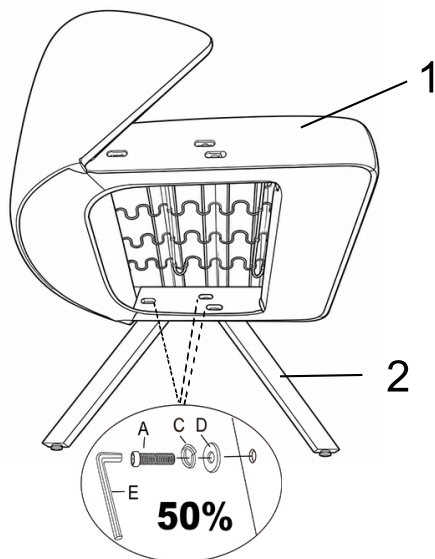


Put the screws into the hole and tighten it to 50%.

STEP 2

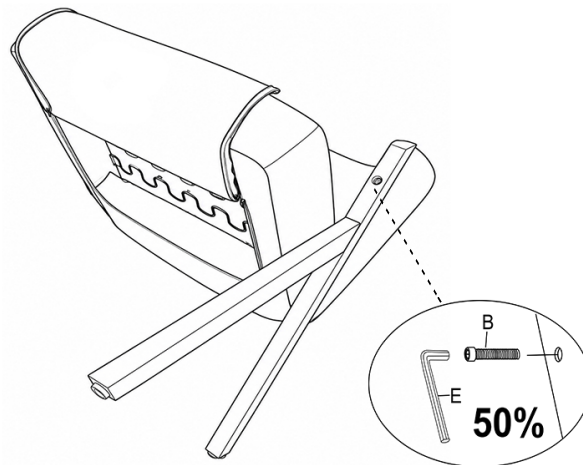


Put the screws into the hole and tighten it to 50%.

STEP 3

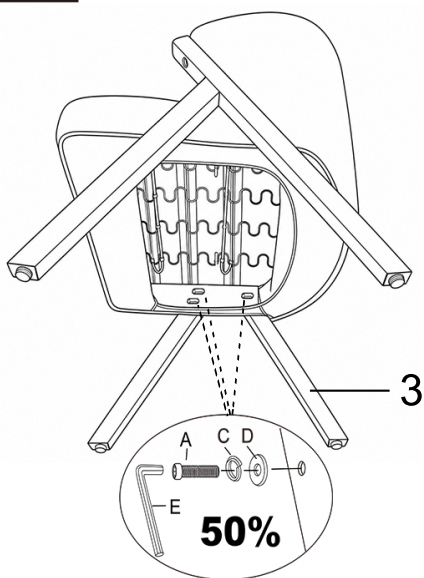


Put the screws into the hole and tighten it to 50%.

STEP 4

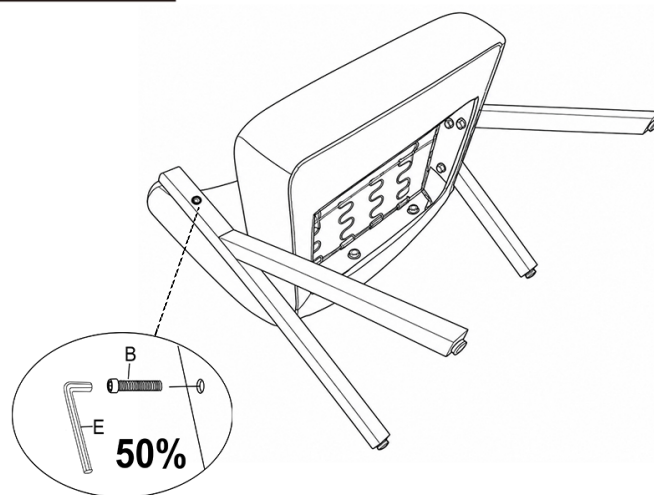


Put the screws into the hole and tighten it to 50%.

STEP 5

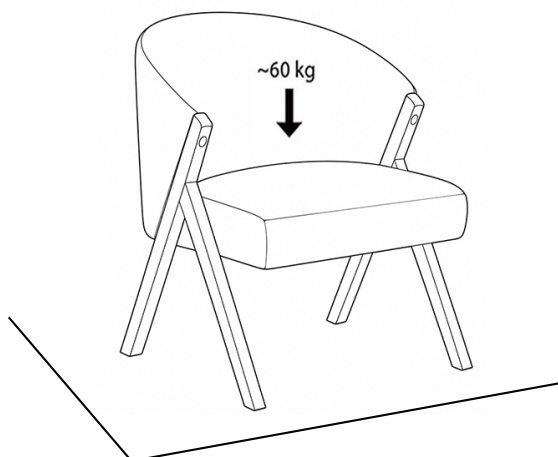

Put a load of approx. 60KG on to the seat.
Adjust until all 4 legs are level
– before you carefully tighten the screws.

STEP 6

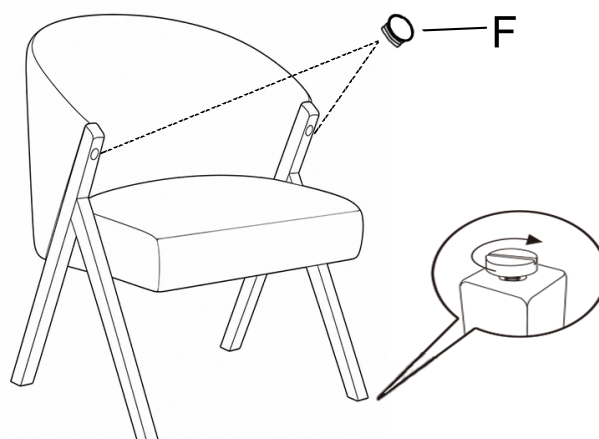

Cap installation is optional.
Use a hammer to tap it into place if desired.