



# WAVE | K-7559

Touchless hybrid 3.5 gpf toilet flushometer

## Features

- Fixture-mount design
- Includes a 30-year hybrid energy cell



DISCONTINUED



## Codes/Standards

*ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.*

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1

CSA B64

CSA B125.3

ASSE 1037/ASME A112.1037/CSA B125.37

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Pressure/Fixture Supply Requirements

Minimum Flowing Pressure: 25 psi (172.4 kPa)

Minimum Flow Rate: 25 gpm (94.6 l/min)

## Material

- Brass

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Technology

- Electronic infrared sensor with WAVE technology for accurate activation
- Slow-closing piston technology

## Warranty

*See website for detailed warranty information.*


KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-30-2026 01:23 - US-CA

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

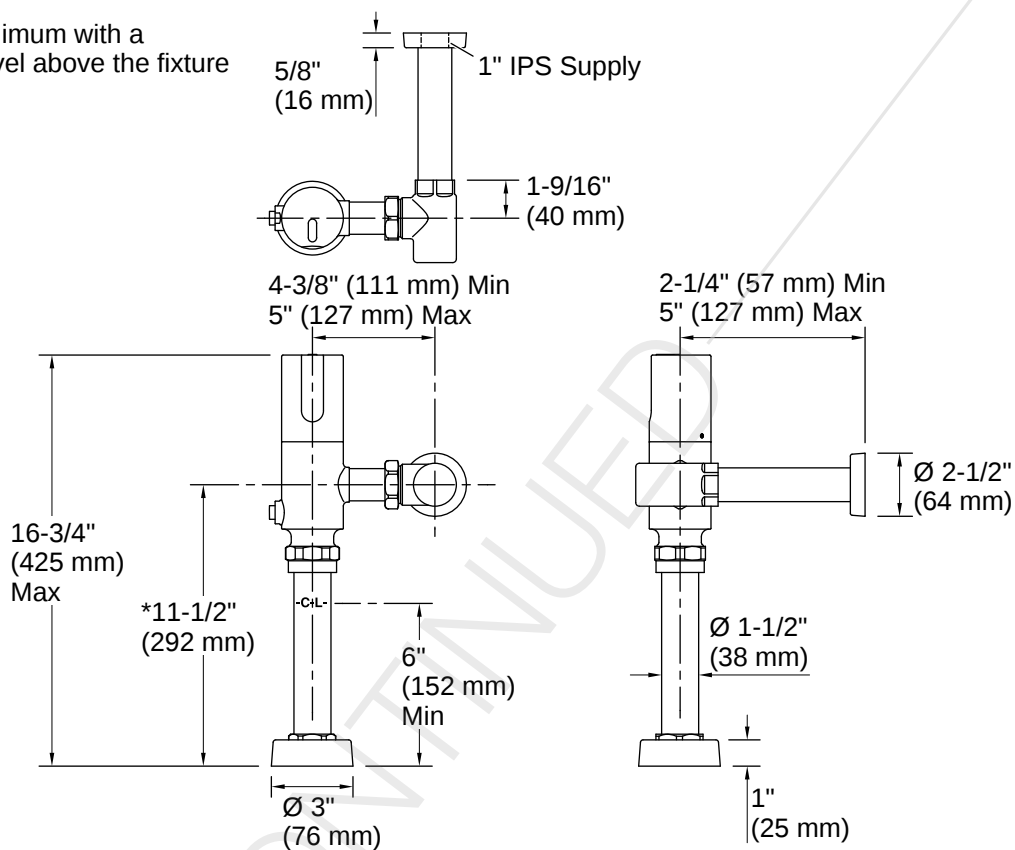

## Installation

- Intended for toilet installations with 1-1/2" (38 mm) spud coupling connection

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

