

Important

For your safety, please ensure the structure is securely fastened , In windy areas, be sure to anchor your Obelisk firmly to the ground. This will keep strong winds from tipping it over and harming your plants.

Maintenance and Care

- Clean with a soft cloth , use mild soap and water if needed.
- Do not use abrasive cleaners or harsh chemicals.
- Avoid prolonged contact with standing water or constantly wet soil.
- If the surface coating is scratched, touch up promptly with rust-resistant outdoor metal paint.
- In inclement weathers, clean, dry, and store indoors at the end of the season.
- Periodically check and retighten fasteners as needed.

Warranty

Warranty: 3 Years Structural Guarantee

Exclusions: Damage caused by misuse, improper installation, or modifications is notcovered.



Contact Us

 +1 (866) 597-1888

 Vego Garden Academy

 hello@vegogarden.com

 vegogarden.com

 vego_garden

 Houston, TX




User Manual for Obelisk Round


Models: VPSSORMDG,VPSSORLDG

Gardening Made Easier. Anytime, Anywhere.

Copyright © 2026 Vego

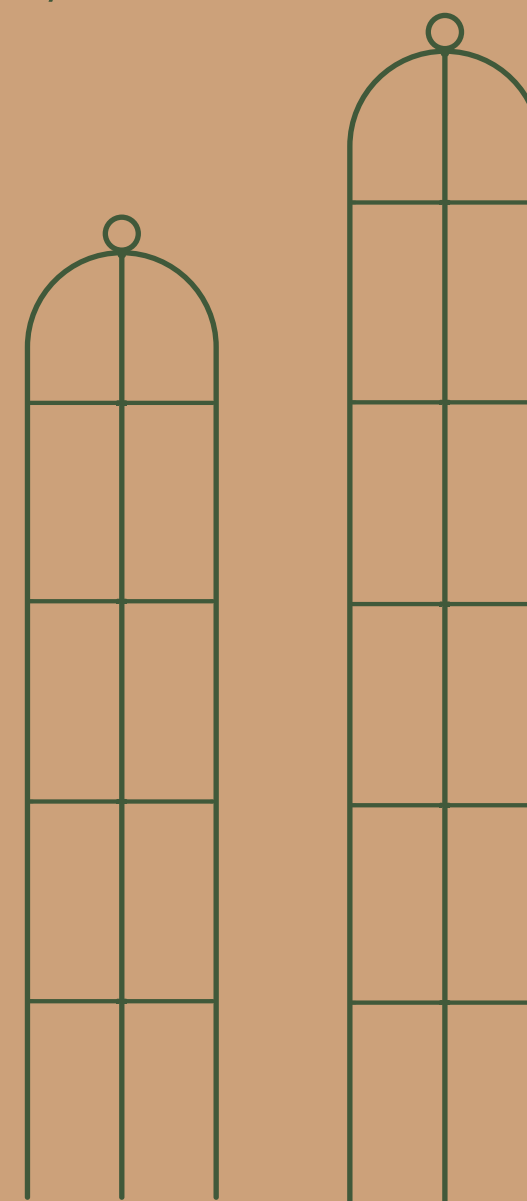

 Parts List

Part Name \ Models	VPSSORMDG	VPSSORLDG
P1 	16	20
P2 	1	1
P3 	1	1
P4 	4	5
F1 	5	5
F2 	1	1

 Safety Precautions

- This product may contain sharp metal corners and edges. To prevent injury:
- Handle with care at all times
 - Wear gloves, closed-toe shoes & long pants when handling
 - Work on a stable, clean surface away from children and pets
 - Follow all instructions carefully and use tools only as directed

If you are unsure about any step, pause and seek assistance.




 Assembly Guide


Obelisk Round-6.4ft

- 1** Position P2 and P3 so the arches cross and overlap at the center, aligning the pre-drilled holes. Insert the F1 screw and secure it with the F2 ball finial. Tighten the connection 3-4 turns only.


Notes:
Make sure P3 is on top and P2 is on the bottom.
Do not fully tighten at this stage – leaving the connection slightly loose allows for easier alignment and adjustment in later steps.

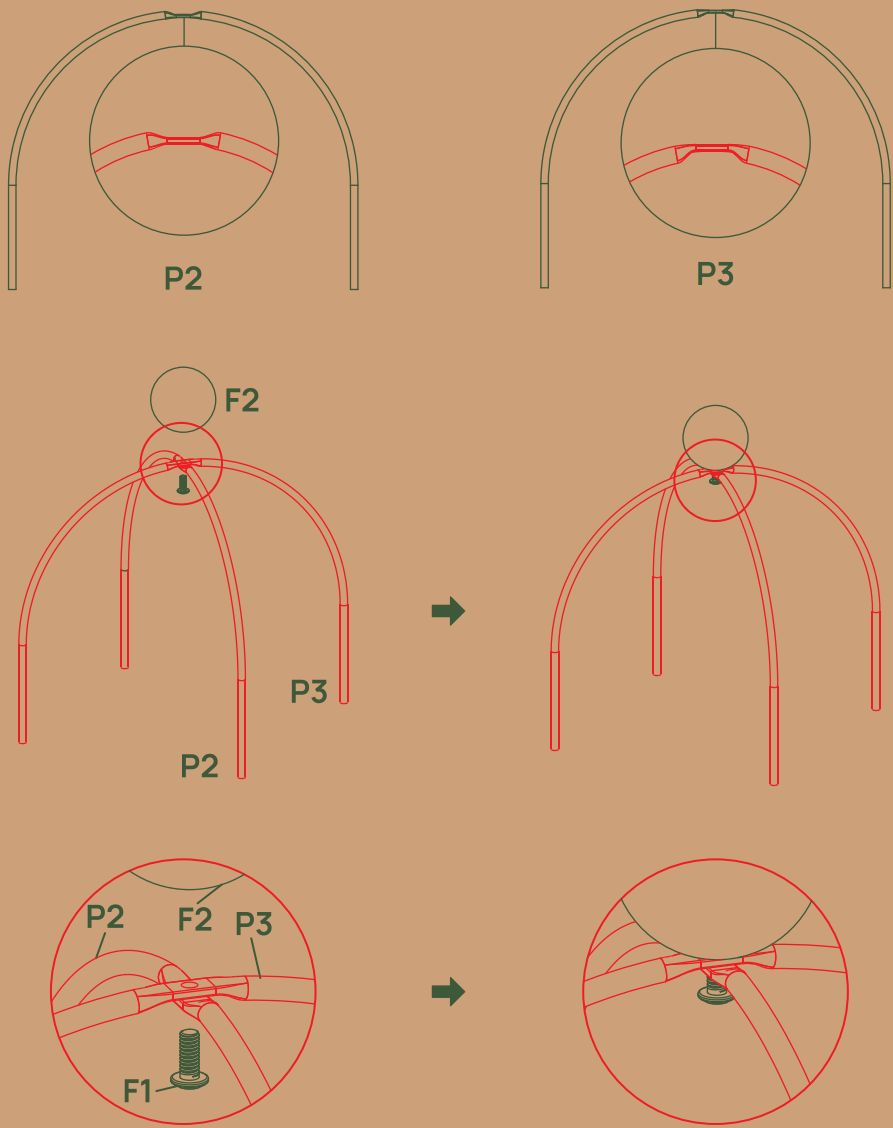



- 2** Install the first tier as shown in the diagram. Insert the threaded ends of the P1 rods into the holes on the P4 rings and secure them by screwing them into the arched ends. After all four P1 rods are securely installed, tighten the F1 and F2 from the previous step.

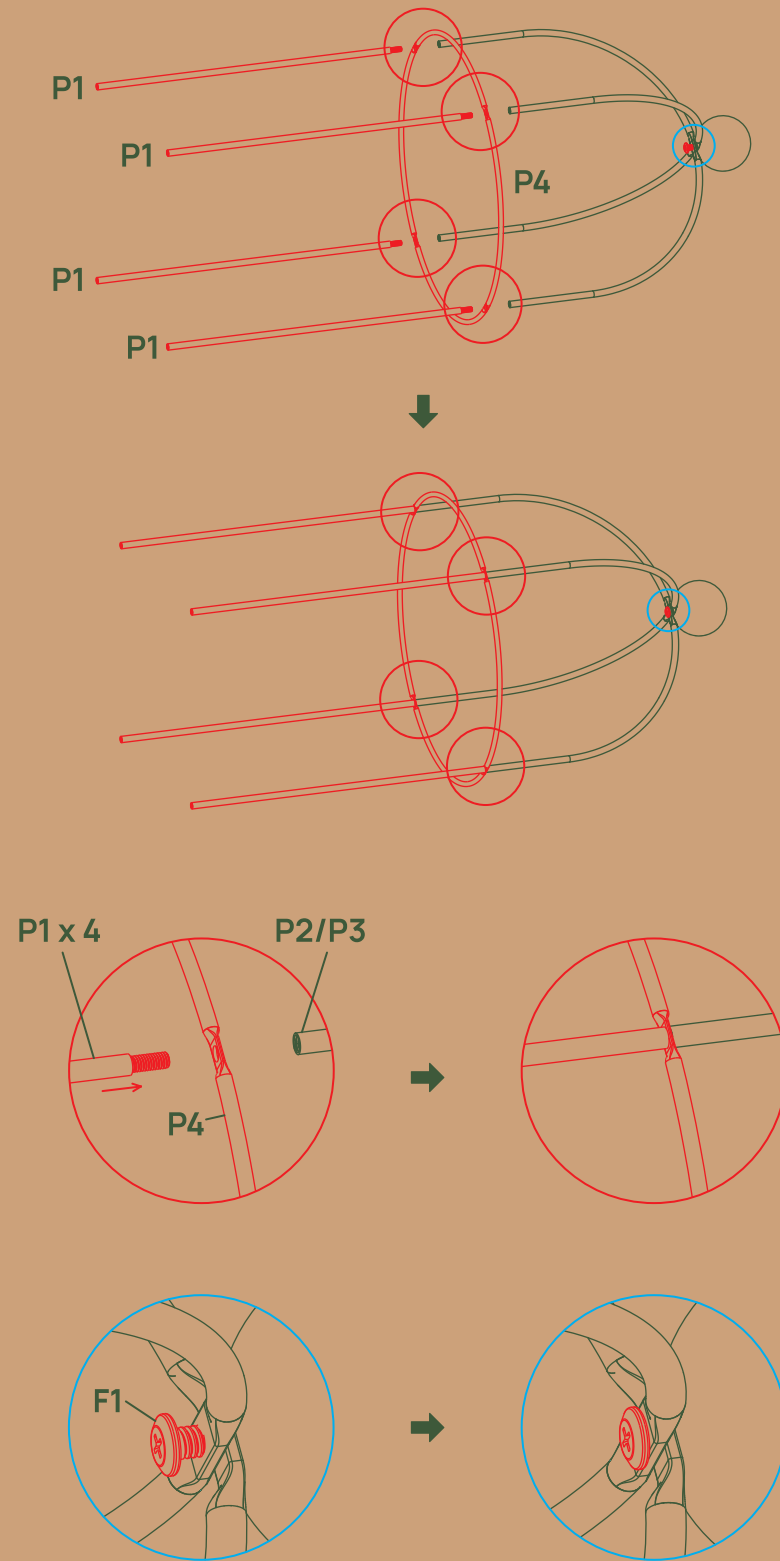

- 3** Install the remaining P1 rods and P4 rings in sequence.

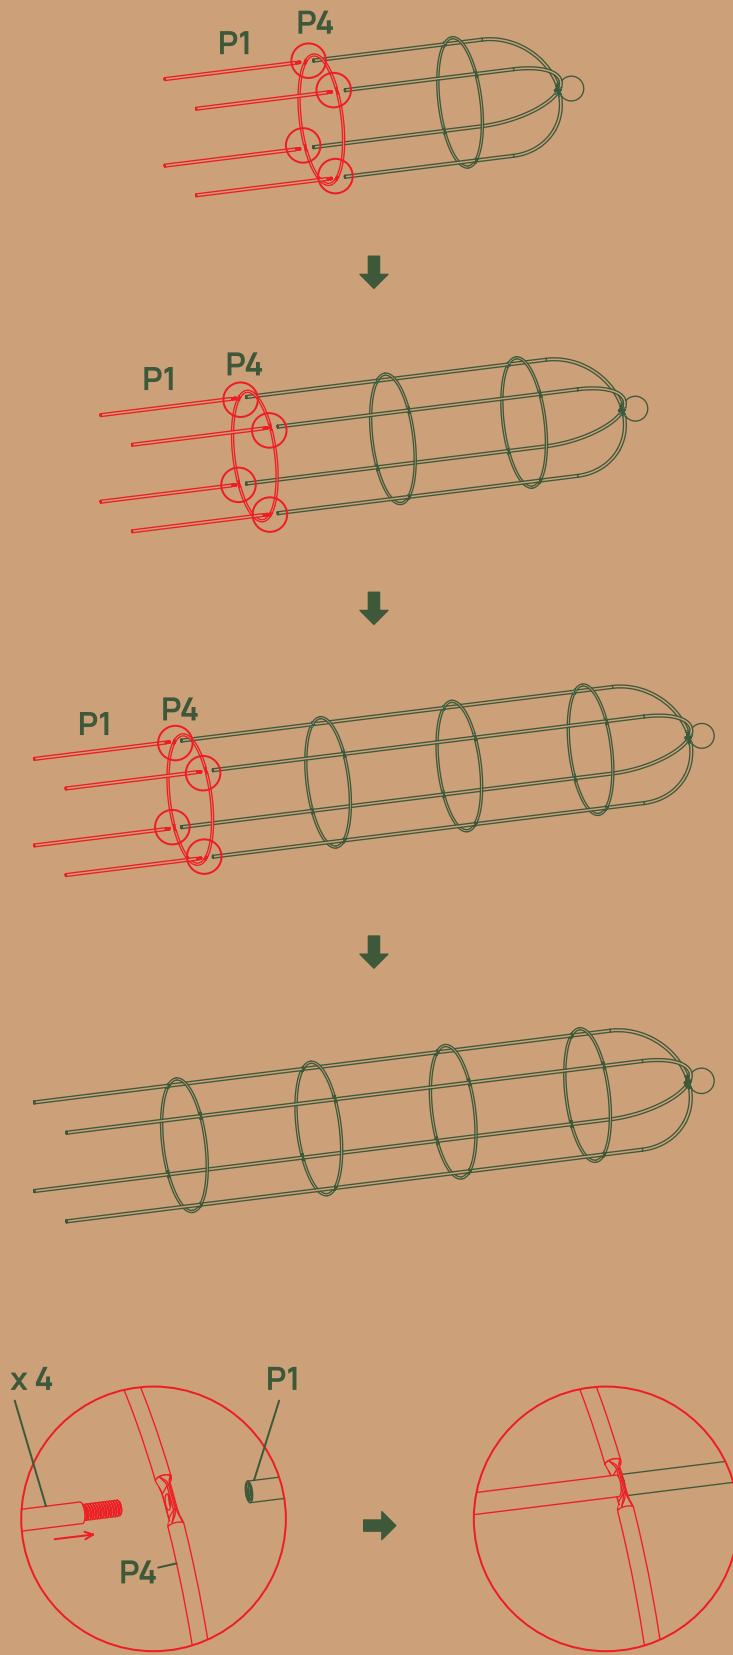


- 4** Install the Way You Need-WITHOUT GROUND SPIKES
As shown in the diagram, replace the bottom four P1 rods with F1 screws.

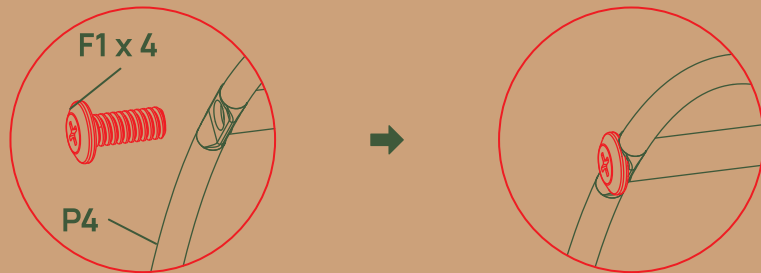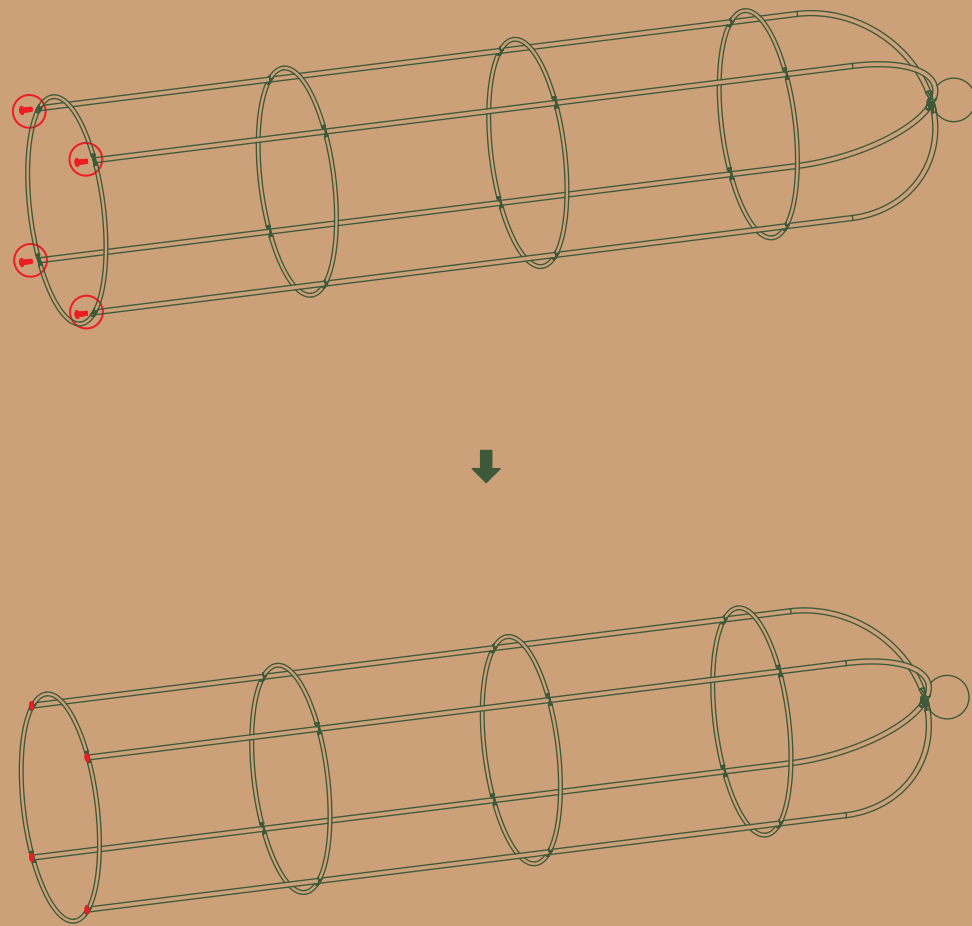

Obelisk Round-7.6ft

- 1** Based on the completed installation of the Obelisk Round-6.4ft in Step 3, install the remaining P1 rods and P4 ring.

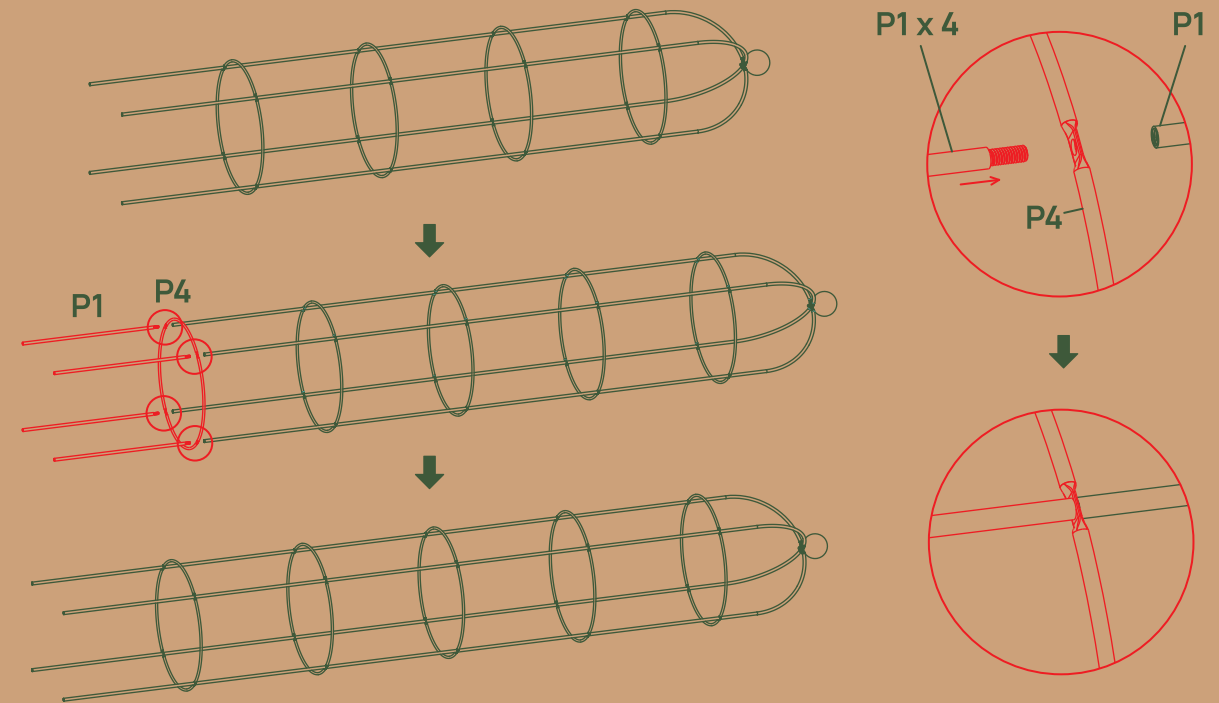

- 2** Install the Way You Need-WITHOUT GROUND SPIKES
As shown in the diagram, replace the bottom four P1 rods with F1 screws.

