

ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. **FIRST, PLEASE WEAR COTTON GLOVES ON YOUR HANDS!**
2. Shut off the power at the circuit breaker and remove old fixture, including the single bar.
3. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
4. **NOTE:** Discharge of the finial(A), remove the plastic shim(B) and cover(C).
5. Be very careful, hold the glass(G) insert the frame of the lamp body(D). **NOTE:** first, the bottom of glass must inset to the frame in the place, fixed the glass with the small sheet copper in the frame. Place the candle sleeve(E) over the lamp holder.
6. Install the light bulbs(No Included) in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
7. Attach the cover(C) and plastic shim(B) to the top pipe thread of lamp body(D), then lock it securely with the finial(A).
8. Attach the assembly lamp body onto the post (No included) and lock it securely with the screws(F).

CONNECTING THE WIRES (Fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wires (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the post.

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.1

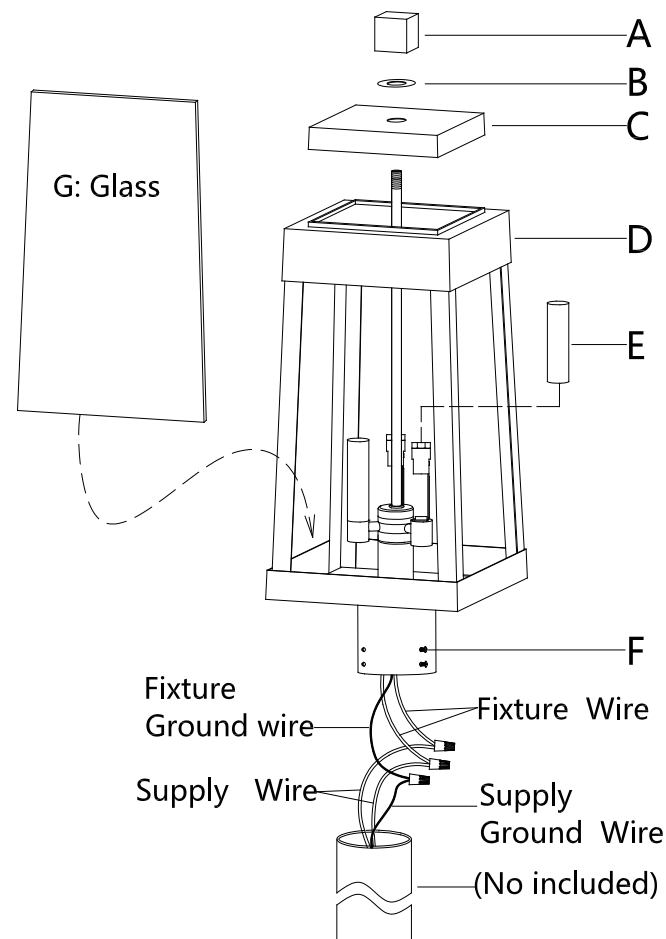


FIG.2

