


edishinē

Ceiling Lights

SKU: HFCL12A
[Instruction Manual]

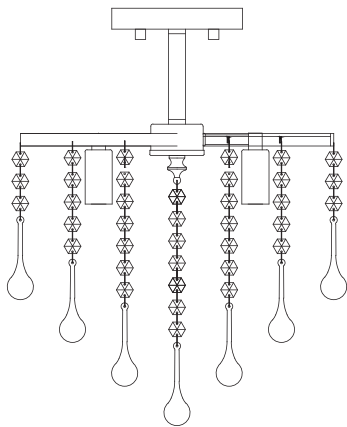

Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

V50710

Warning:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position. Depending on which type of fuse box in your home:

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL


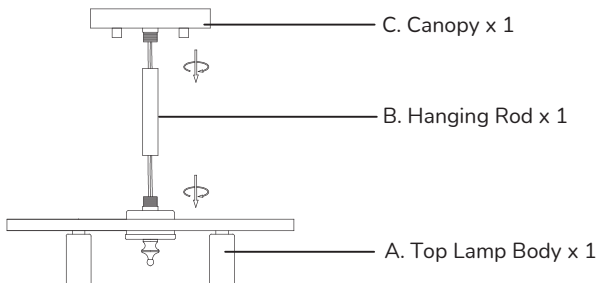











FIG.3 FUSE BOX

PACKING LIST




1. Pass the power cord of Top Lamp Body (A) through Hanging Rod (B) and Canopy (C).
2. Turn Hanging Rod (B) onto the connection of Top Lamp Body (A), then insert Canopy (C) into the teeth of B and tighten it.

INSTALLATION KIT


AA  Mounting Bracket x1	BB  Outlet Box Screw x2	CC  Ground Screw x1	DD  Wire Nut x3
EE  Knurled Nut x2	FF  7pcs Crystal Strand x9	GG  5pcs Crystal Strand x16	HH  3pcs Crystal Strand x24
II  Raindrop Crystal x49			

1. Raindrop Crystal (II) and Crystal Strand have some extra pieces for back-up.
2. Knurled Nut (EE), Ground Screw (CC) have been pre-installed on Mounting Bracket (AA).
3. Hang Raindrop Crystal (II) on 7pcs Crystal Strand (FF) / 5pcs Crystal Strand (GG) / 3pcs Crystal Strand (HH) respectively.

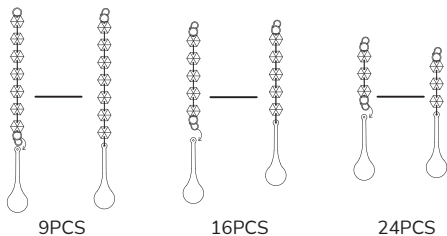

(As shown in the figure)

INSTALLATION

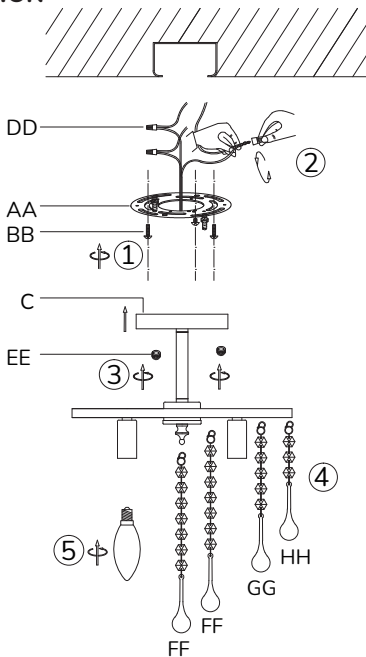

Step 1.

1: Loosen the Knurled Nut (EE) from Canopy (C), take out the Mounting Bracket (AA).

2: Take off the screws from outlet box, attach the Mounting Bracket (AA) to the box with screws taken off or Outlet Box Screw (BB).

Step 2.

1: Wrap the ground wire from the outlet box around the Ground Screw (CC) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.

2: Connect the wires from the fixture to the house supply wires, neutral wire (white) to neutral wire, and hot wire (black) to hot wire.

3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other side.

Step 3.

Pass the Canopy (C) through the Mounting Bracket (AA) and lock it with the Knurled Nut (EE).

Step 4.

Hang the Crystal Strand (FF/GG/HH) in sequence on the iron frame, as shown in the picture.

Step 5.

E12 Bulbs X 4
(Max 40W each, not included)

Specifications

- Input Voltage: 120VAC 60Hz
- Max.Load Power: incandescent Bulb 40W
- Socket Type: Standard Medium E12

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date.

Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China