

EL900HT

6" Line Voltage New Construction
Single Wall Sloped Ceiling Housing



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

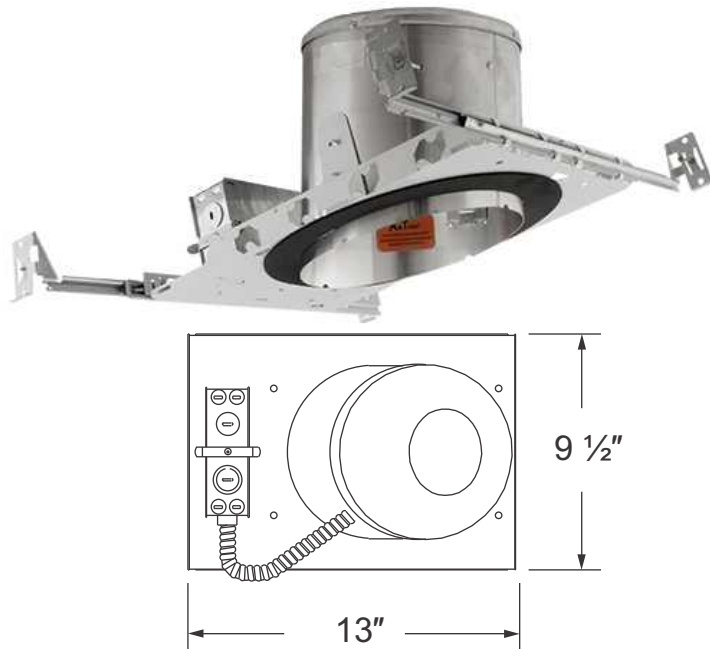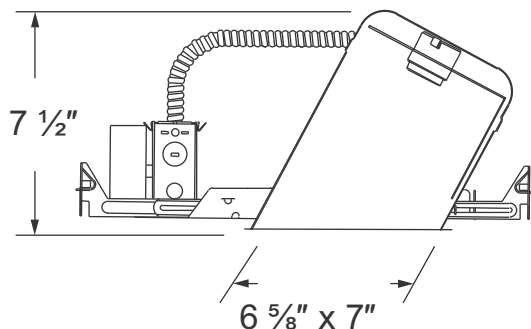

PRODUCT SPECIFICATIONS

- Single Wall, for use in non-insulated ceilings, where insulation is positioned 3" from all sides of the fixture.
- Integral thermal protector guards against improper lamping. Single Wall Construction.
- Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent positioning
- 7 1/2" height allows for use in 2 x 8 construction.
- For use in sloped ceiling with pitch range 2/12 to 6/12.
- Trims sold separately.

Lamp: 120VAC Traditional or LED PAR30/PAR38
MAX 150W

Lamp Holder: Medium base socket

Labels: U.L. listed for direct contact with insulation
U.L. listed for damp location
U.L. listed for feed through

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockouts. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Captive bar hangers span 24" and can be repositioned 90°. Housing accommodates various ceiling thickness.

Mounting Frame: Stamped galvanized steel construction for corrosion resistance

CATALOG NUMBER

Example: EL900HT

See trims page for variety of trims available

