

ASSEMBLY INSTRUCTIONS

ITEM NO: FX-3811-4


CAREFULLY PLACE ALL PARTS ON A SMOOTH SURFACE AND LAY THEM UP PER SKETCH BELOW.

** THESE INSTRUCTIONS ARE PROVIDED FOR YOUR SAFETY PURPOSE AND IT IS VERY IMPORTANT THAT THEY ARE READ COMPLETELY BEFORE BEGINNING THE INSTALLATION OF YOUR FIXTURE.*

** DIRECT WIRE FIXTURES: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.*

SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX/CIRCUIT BREAKER.

1. DRILL 4 HOLES ON THE CEILING WITH THE SPACE MATCHING MOUNTING BAR(B), AND INSERT PLASTIC ANCHORS(A).
2. INSTALL MOUNTING BAR (B) TO JUNCTION BOX WITH MOUNTING SCREWS(C).
3. PUT WIRE THROUGH CANOPY (D) AND MOUNTING BAR (B) AND MAKE WIRE CONNECTIONS: CONNECT THE GREEN GROUND WIRE "⎓", CATHODE WIRE "N" IN WHITE , ANODE WIRE "L" IN BLACK TO THE SUPPLY WIRES IN THE JUNCTION BOX AS ILLUSTRATED WITH WIRE NUTS.
4. SCREW LOOP (H) TO LIGHTING BODY (K), JOIN THE CANOPY (D) AND LIGHTING FIXTURE(K) WITH CHAIN (G) USING LINK UNIT (F).
5. ALIGN THE CANOPY (D) TO THE MOUNTING BAR(B) AND TIGHTEN WITH SIDE SCREWS (E).
6. INSTALL RECOMMENDED BULBS (NOT INCLUDED IN THIS PACKAGE).

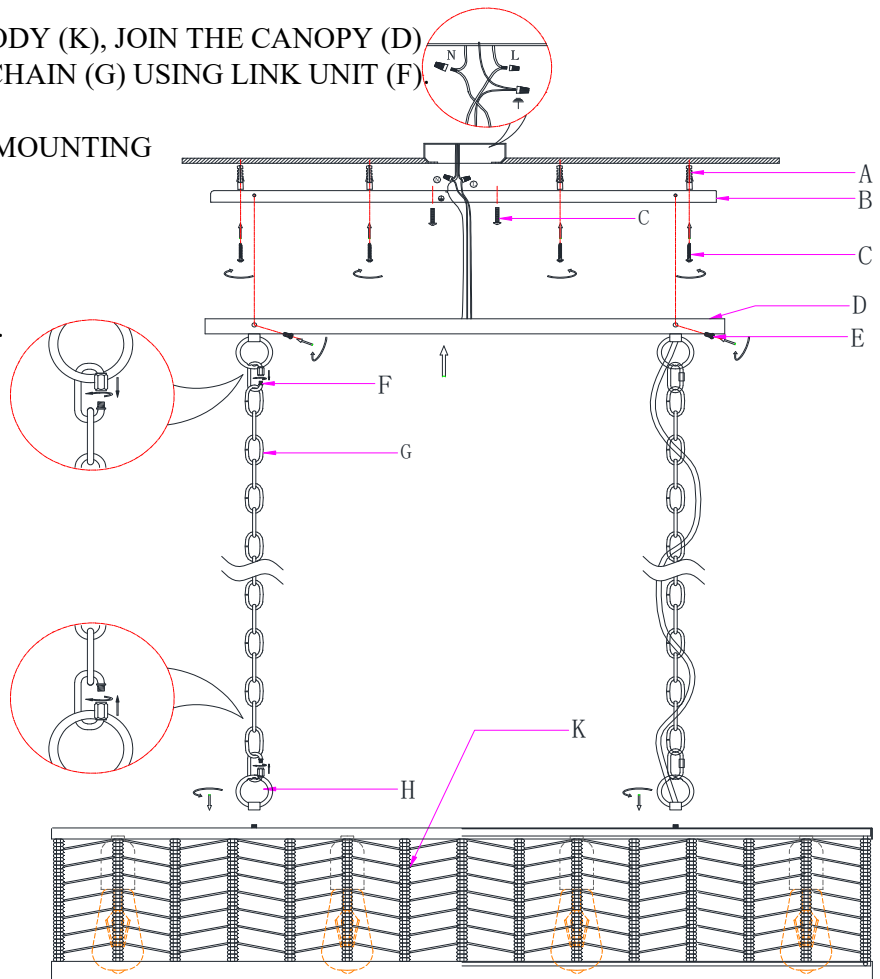

Use Max 60W X 4 Type A or T bulb (Bulbs Not Included)

TURN OF POWER AND ENJOY!

TO REPLACE THE BULB:

TURN OFF POWER (UNPLUG FROM THE WALL OUTLET) BEFORE REPLACING THE BULB(S), MAKING SURE THE BULB(S) HAVE SUFFICIENT TIME TO COOL DOWN.

DO NOT SUBJECT THIS FIXTURE TO ANY SHOCK WHILE LIT AS SHATTERING OF BULBS MAY RESULT .

CARE INSTRUCTIONS:

TO CLEAN, USE A SOFT CLOTH ONLY. DO NOT USE ANY CHEMICAL OR ABRASIVE CLEANERS.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.