


Reversable handle

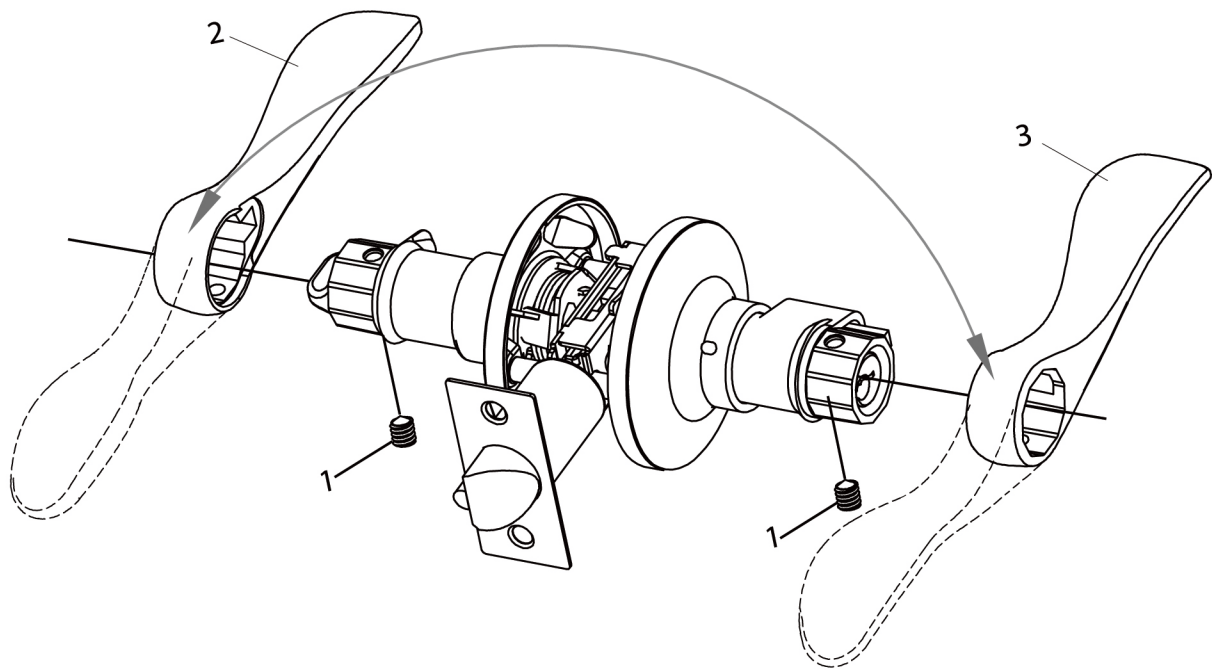

1. Set Screw 2. Handle 3. Handle

The "Reversible Lever" function allows you to install the leverset on either a left hand, or a right hand configured door. The interior lever can be removed from the rosette assembly and switched with the exterior lever. This prevents the levers from being upside down when installation is complete


Step 1. Loosen and remove set screw (1)

Step 2. Slide handle off and rotatae 180° (2-3)


Step 3. Slide handle back on and tighten set screw

HOW TO INSTALL THIS LEVER LOCK SET


- USE TEMPLATE TO MARK HOLES
- DRILL TWO HOLES
- INSTALL LATCH
- INSTALL STRIKE PLATE

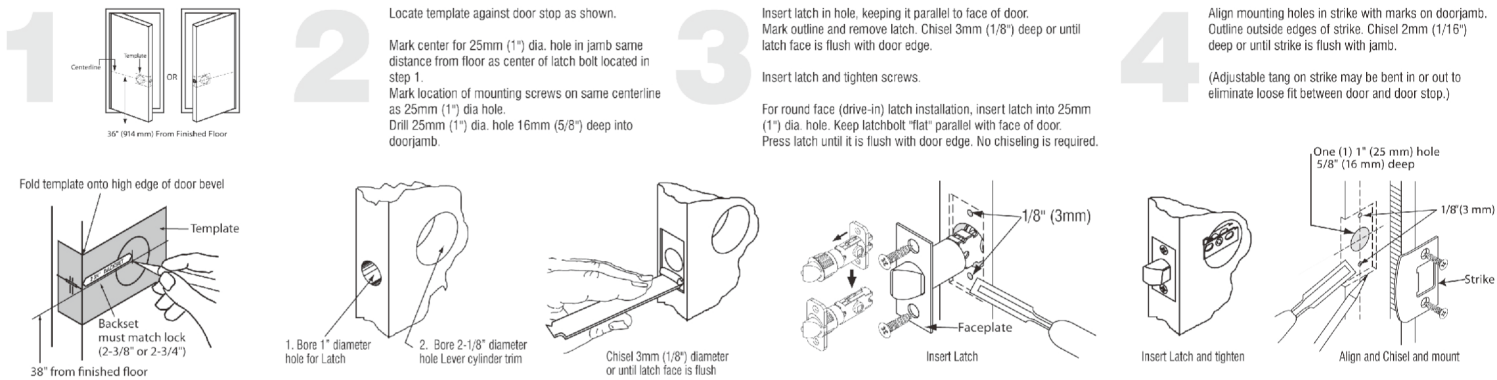

- INSTALL OUTSIDE KNOB
- INSTALL INSIDE TRIM
- KNOB PIECES

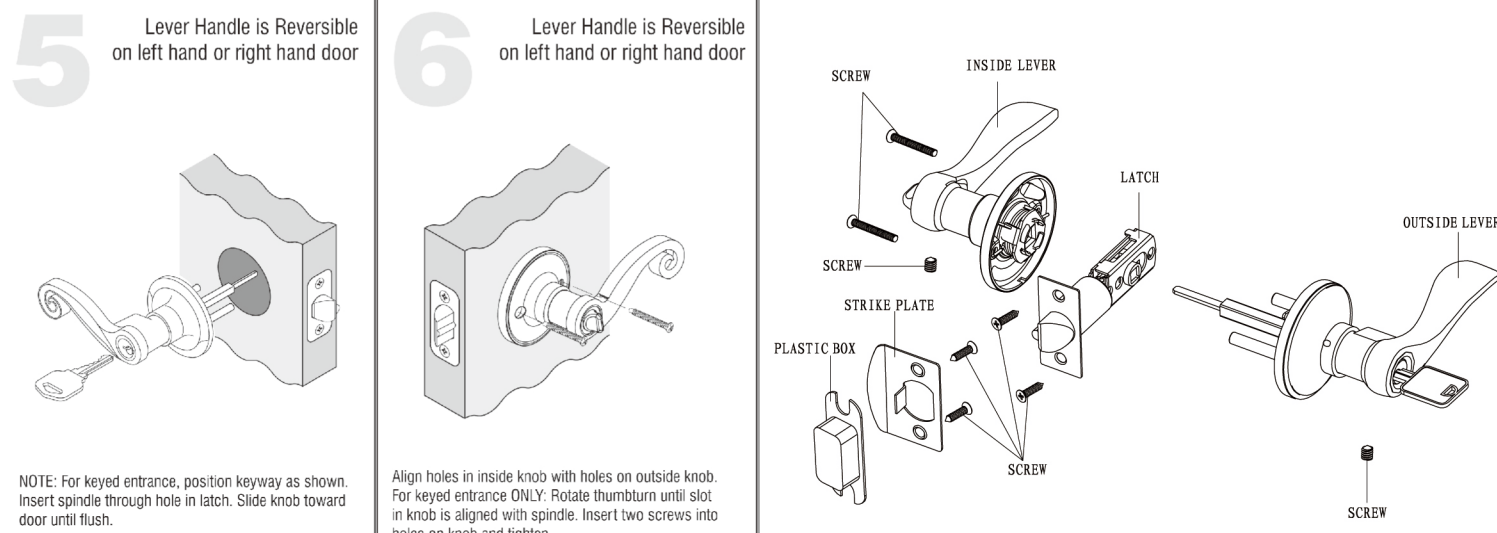

NOTE: CHECK FOR PROPER OPERATION BEFORE CLOSING DOOR

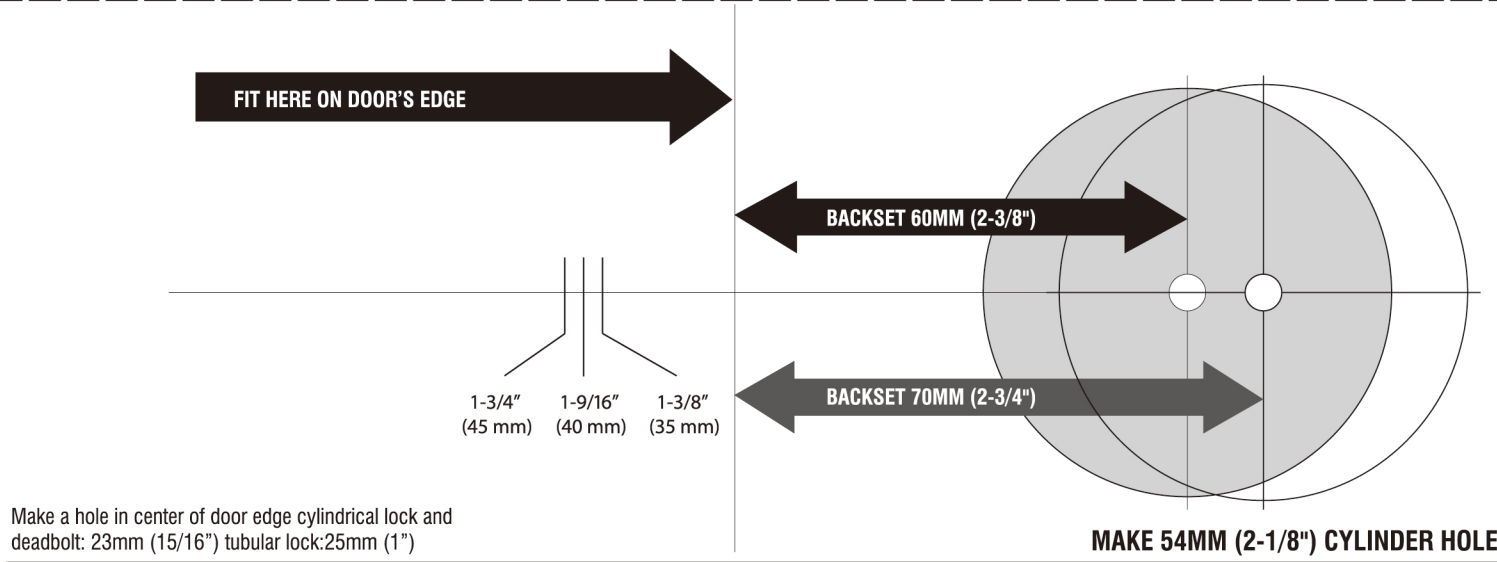

Make a hole in center of door edge cylindrical lock and deadbolt: 23mm (15/16") tubular lock:25mm (1")