




Installation & Assembly

Parts

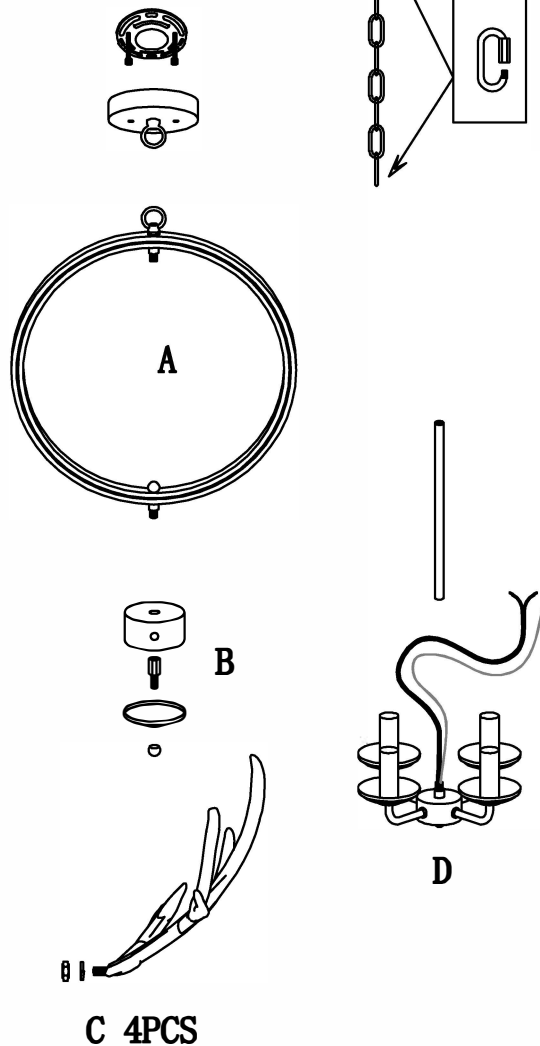


Steps 1

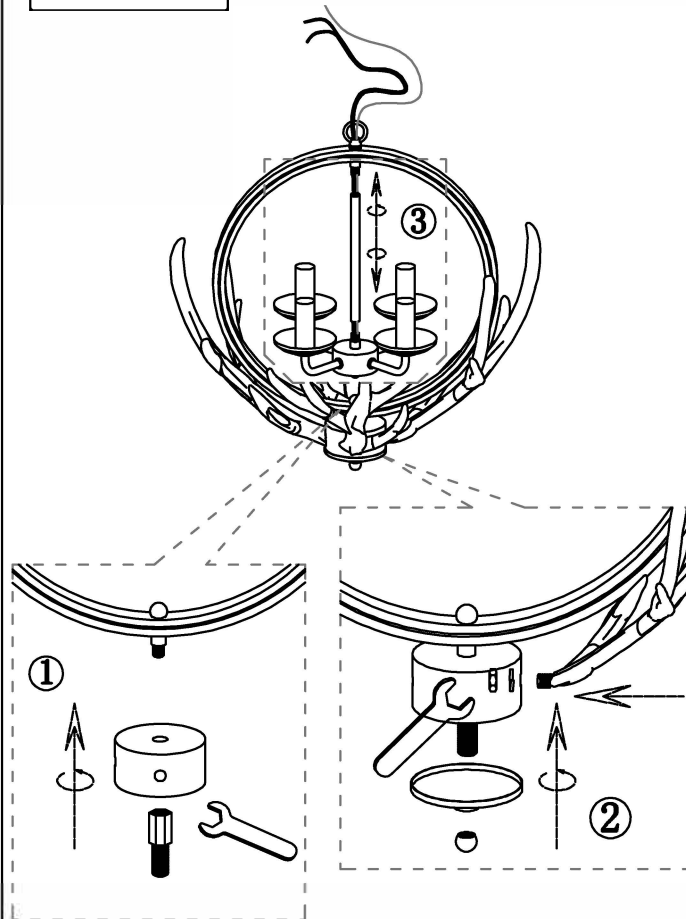

1. As shown in the figure, install accessory B on accessory A.
2. As shown in the diagram, attach the 4 parts (C) to parts B and secure them with hex nuts, and finally fix the bottom assembly to the round plate with ball nut.
3. As shown in the diagram, thread the main wire of part D through part A and the lamp body, then assemble them together.

Steps 2

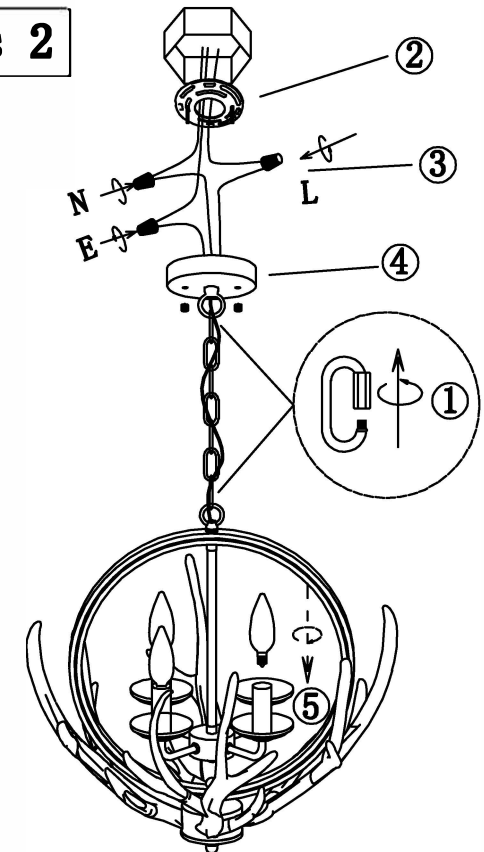

1. Pass the main line through the chain and ceiling box, loosen the safety buckle as shown in the figure, link the chain with the lamp body and tighten the safety buckle.
2. Assembled the mounting bracket to the ceiling junction box with the screw.
3. Connect the power cord out from the ceiling junction box to lamp wires with the lead wire and wire nut. according the color to connect. (U.S. - black for "L", white for "N", copper wire for "Ground E")
4. Assemble the canopy to the mounting bracket with the screw.
5. Install the bulb. Bulbs need to be purchased separately.