



Specification

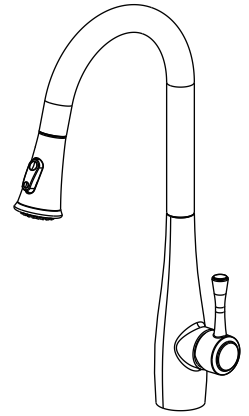

Single-Handle Pull-Down Sprayer Kitchen Faucet

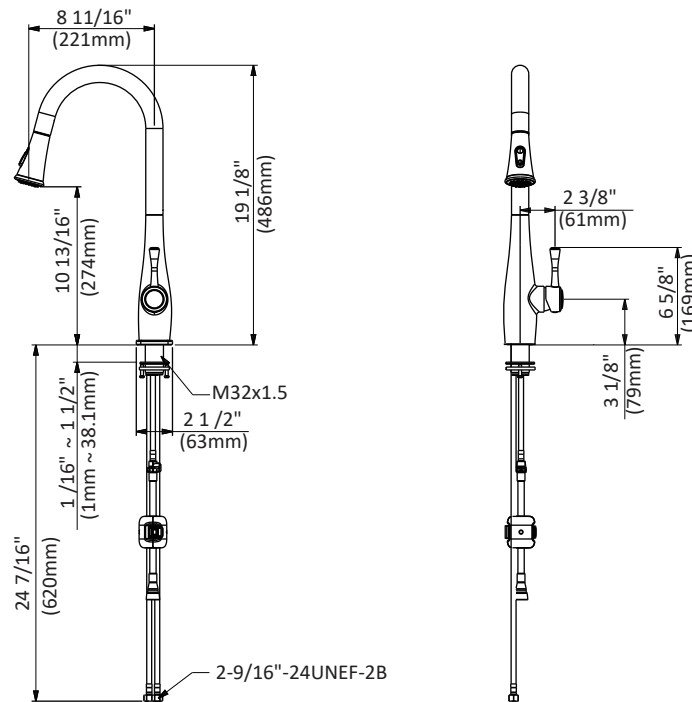

• STANDARD SPECIFICATIONS

HomLux faucets offer smooth operation, easy movement, self retraction, and secure docking

- 2.2 GPM (8.3 L/min) at 60 PSI
- Pull down spray with 59" braided hose
- Two-function wand; Aerated stream or spray
- Requires 1 hole sink
- Spout rotates 180°
- Ceramic valve for lifetime drip-free operation
- Zinc alloy body, zinc alloy handle, stainless steel elbow
- Quick connect system for easy installation

• CERTIFICATION

- IAPMO Certified: ASME A112.18.1/CSA B125.1