


## IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.  
**Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.

**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.

## INSTALLATION INSTRUCTIONS

1. Measure the canopy height on Fixture Body (E) with measuring tape. Adjust Canopy Screws (C) on Mounting Plate (A) to the height of the measured canopy plus 1/4" to allow them to protrude through the canopy during installation. Lock Canopy Screws (C) in place with the hex nuts.
2. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure Mounting Plate (A) is positioned with Canopy Screws (C) pointing away from the junction box.
3. Place Fixture Body (E) against the ceiling by inserting Canopy Screws (C) through appropriate holes located on the canopy. 1/4" of the threaded portion of Canopy Screws (C) should be visible (readjust Canopy Screws (C) if 1/4" is not visible). Remove Fixture Body (E).  
**Note: If you are having difficulty threading Canopy Screws (C) through the canopy, use straws as guides.**
4. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (D).

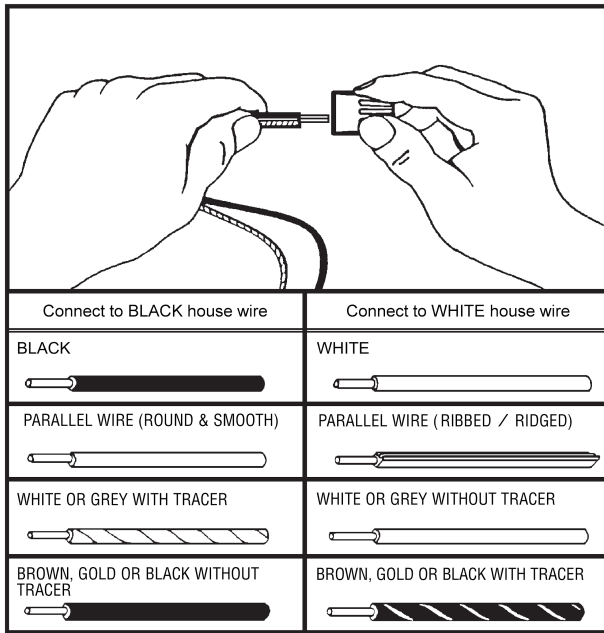

- A.** Connect the ground wire (bare copper or green) from your fixture to the:
- 1) ground wire in the junction box, or
  - 2) ground screw in the junction box
- B.** Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C.** Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

5. Place all wires and Wire Connectors (D) back into the junction box.
6. Place Fixture Body (E) against the ceiling, ensuring Canopy Screws (C) are protruding through the holes in the canopy. Secure Fixture Body (E) in place to Canopy Screws (C) with Cap Nuts (F).  
**Note: If fixture does not sit flush against the ceiling, remove fixture and readjust Canopy Screws (C) and hex nuts.**
7. Install light bulbs (not included) into the sockets.
8. Affix Screw Stem (G) 5/8" into the coupling on Fixture Body (E) and secure in place with Hex Nut (K).
9. On the opposite end of Screw Stem (G), remove Finial (M), Cap (L), Hex Nut (K) and Metal Washer (H) and Rubber Washer (I), leaving behind the other Rubber Washer (I), Metal Washer (H) and Hex Nut (K). Adjust Hex Nut (K) on Screw Stem (G) to 5/8" from the bottom.
10. Place Diffuser onto Screw Stem (G) and secure in place with removed Rubber Washer (I), Metal Washer (H) and Hex Nut (K).
11. Attach Cap (L) and secure with Finial (M).

Enjoy your new fixture!

**HELPFUL TOOLS:** Safety Goggles, Screwdriver, Ladder, Measuring Tape

