



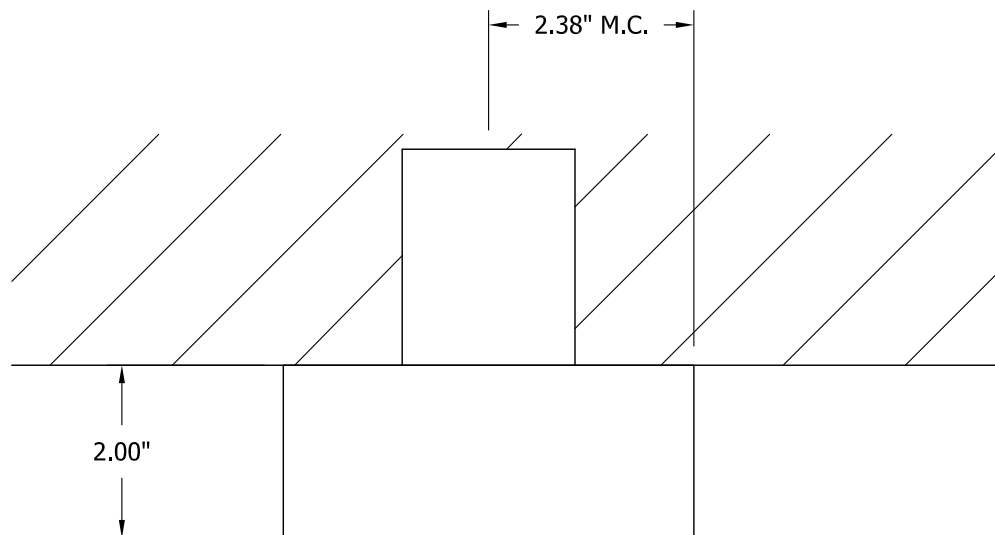

FRONT VIEW

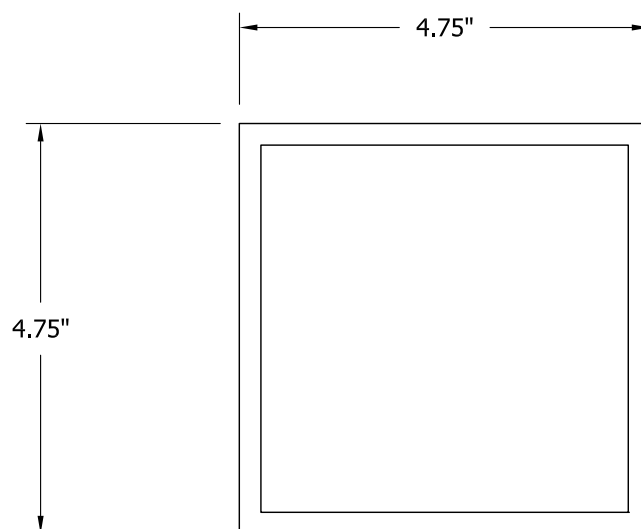

BOTTOM VIEW

OXYGEN LIGHTING ©

PYXIS surface
120v **3-610-22**
277v **37-610-22**

LAMPING

- o (1x) 8.2w LED array
- o 3000K, 350mA
- o Initial Lumens: 1173 lm
- o Delivered Lumens: 354 lm
- o CRI>80
- o Color Consistency: 3 Step MacAdam Ellipse

METAL FINISHES

- o **22** - Oiled Bronze
- o **24** - Satin Nickel
- o **40** - Aged Brass

DIMENSIONS

- o 4.75" (w) x 4.75" (h) x 2.00" (ext.)

INSTALLATION

- o 2" x 3" J-Box
- o 4" Octagon J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Approved for ceiling or wall mount application
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

DIFFUSER

- o Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DRIVER (Dimmable)

- o (1 x) 0-10v & Reverse Phase Dimming Constant Current, 12W, 350mA

Sample Catalog Number

Series #	Finish	=	Catalog Number
3-610	24	=	3-610-24



oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

PROJECT: _____
DATE: _____

