


Fiberglass Exterior Door with KD Frame - Installation Guide



BASIC PARTS&COMPONENTS

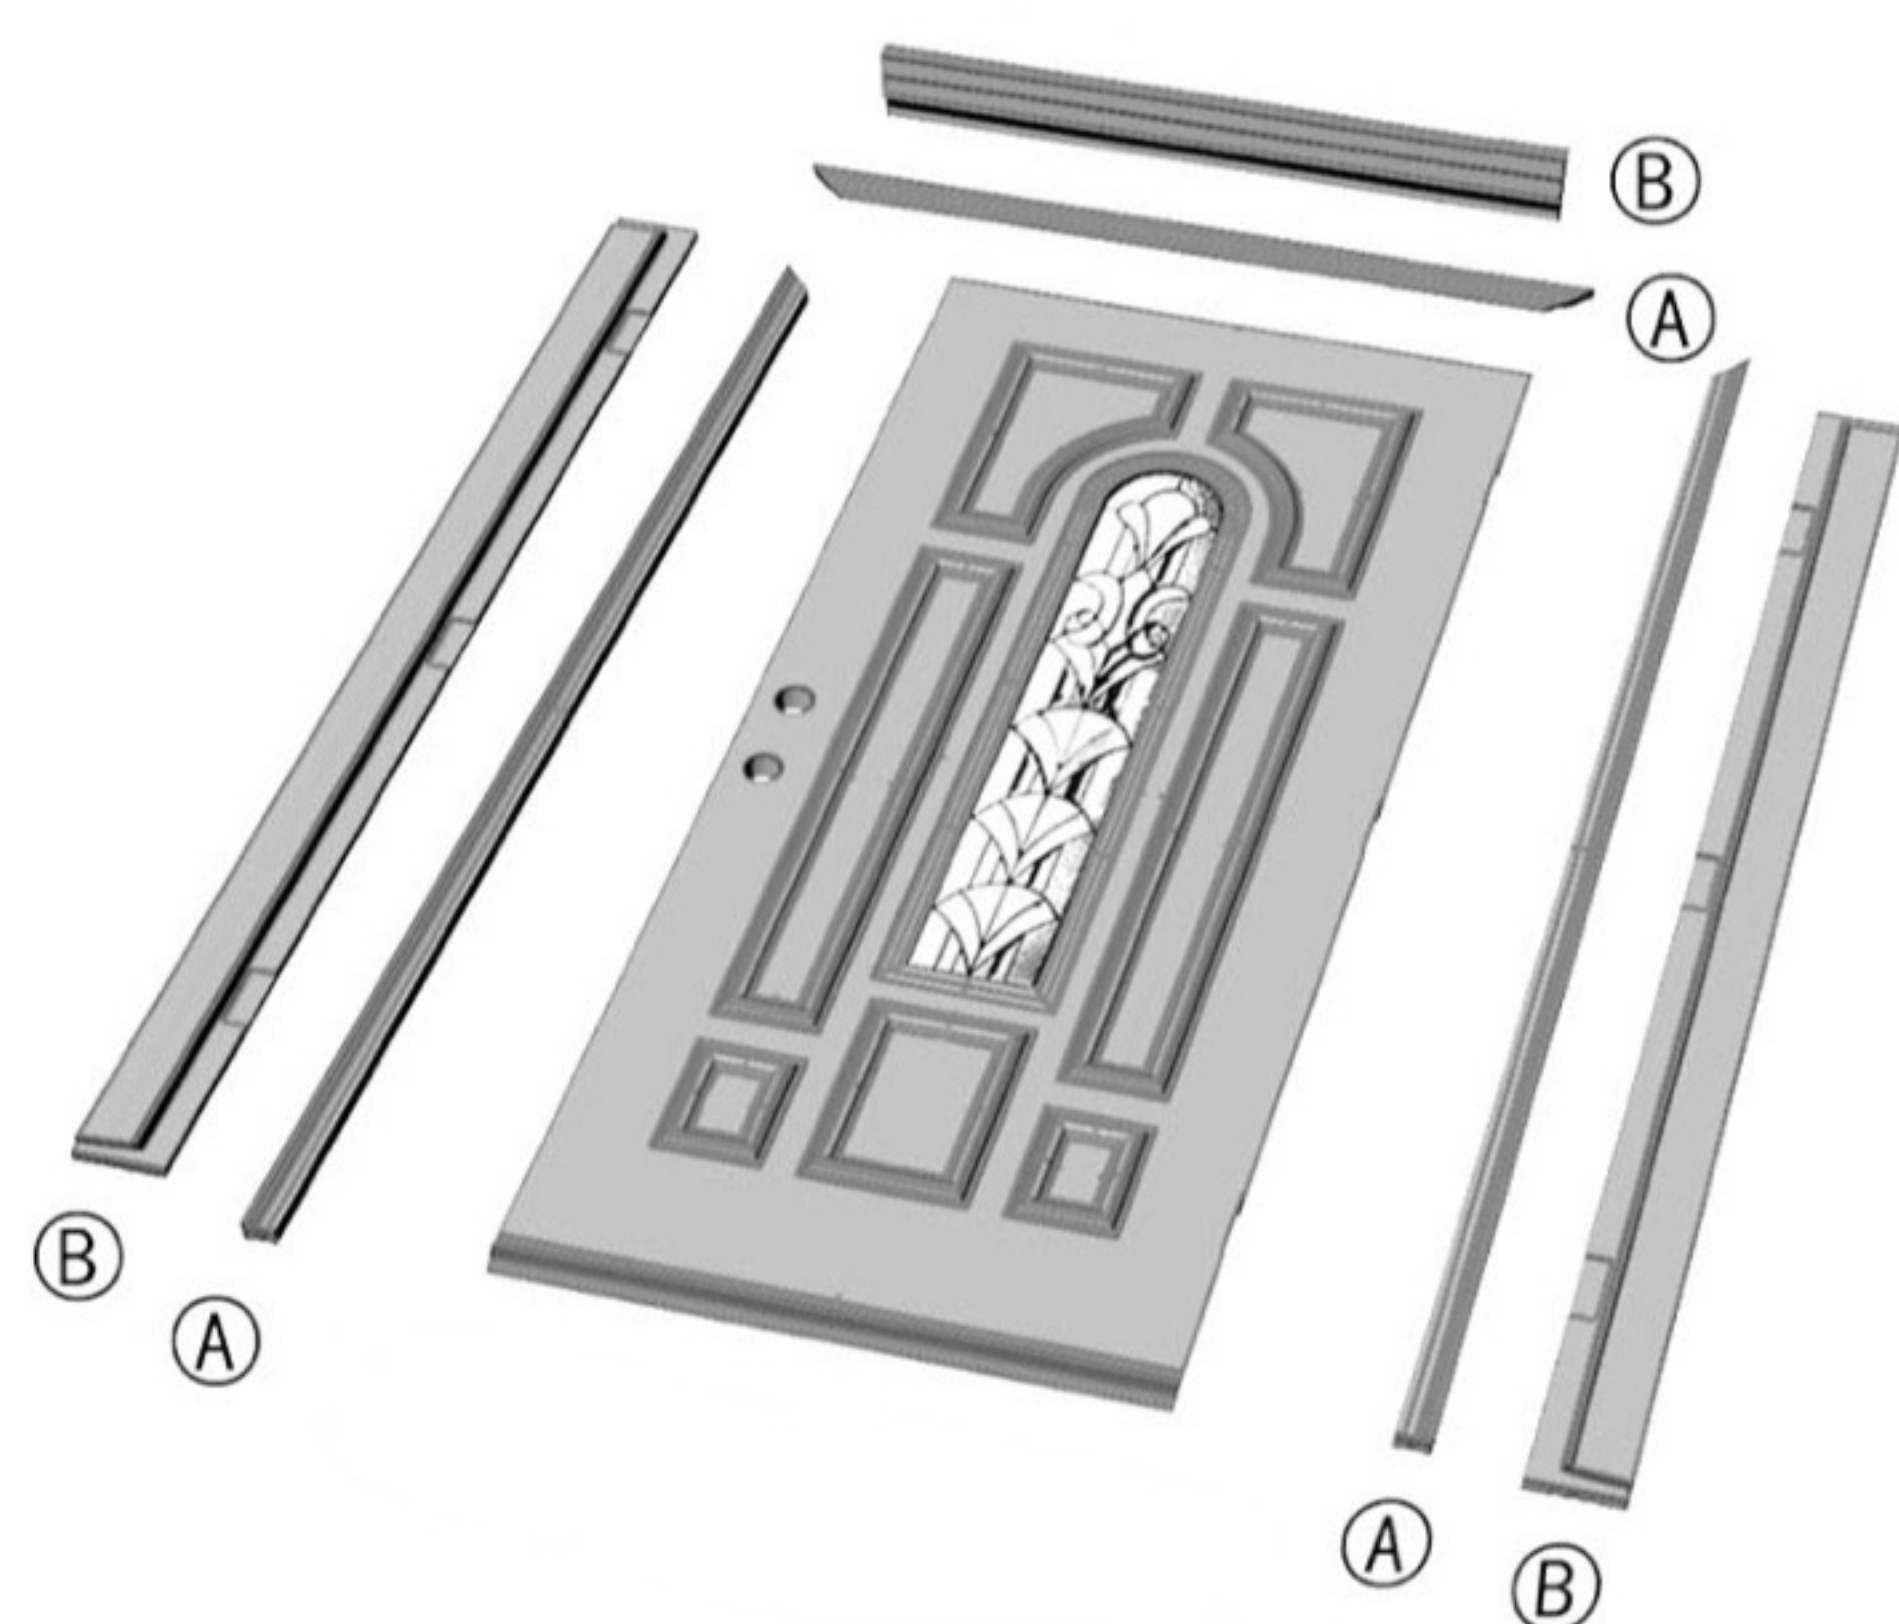

LEFT HAND INSWING




RIGHT HAND INSWING


A. Brick Mould

B. Door Jamb


C. Hinges

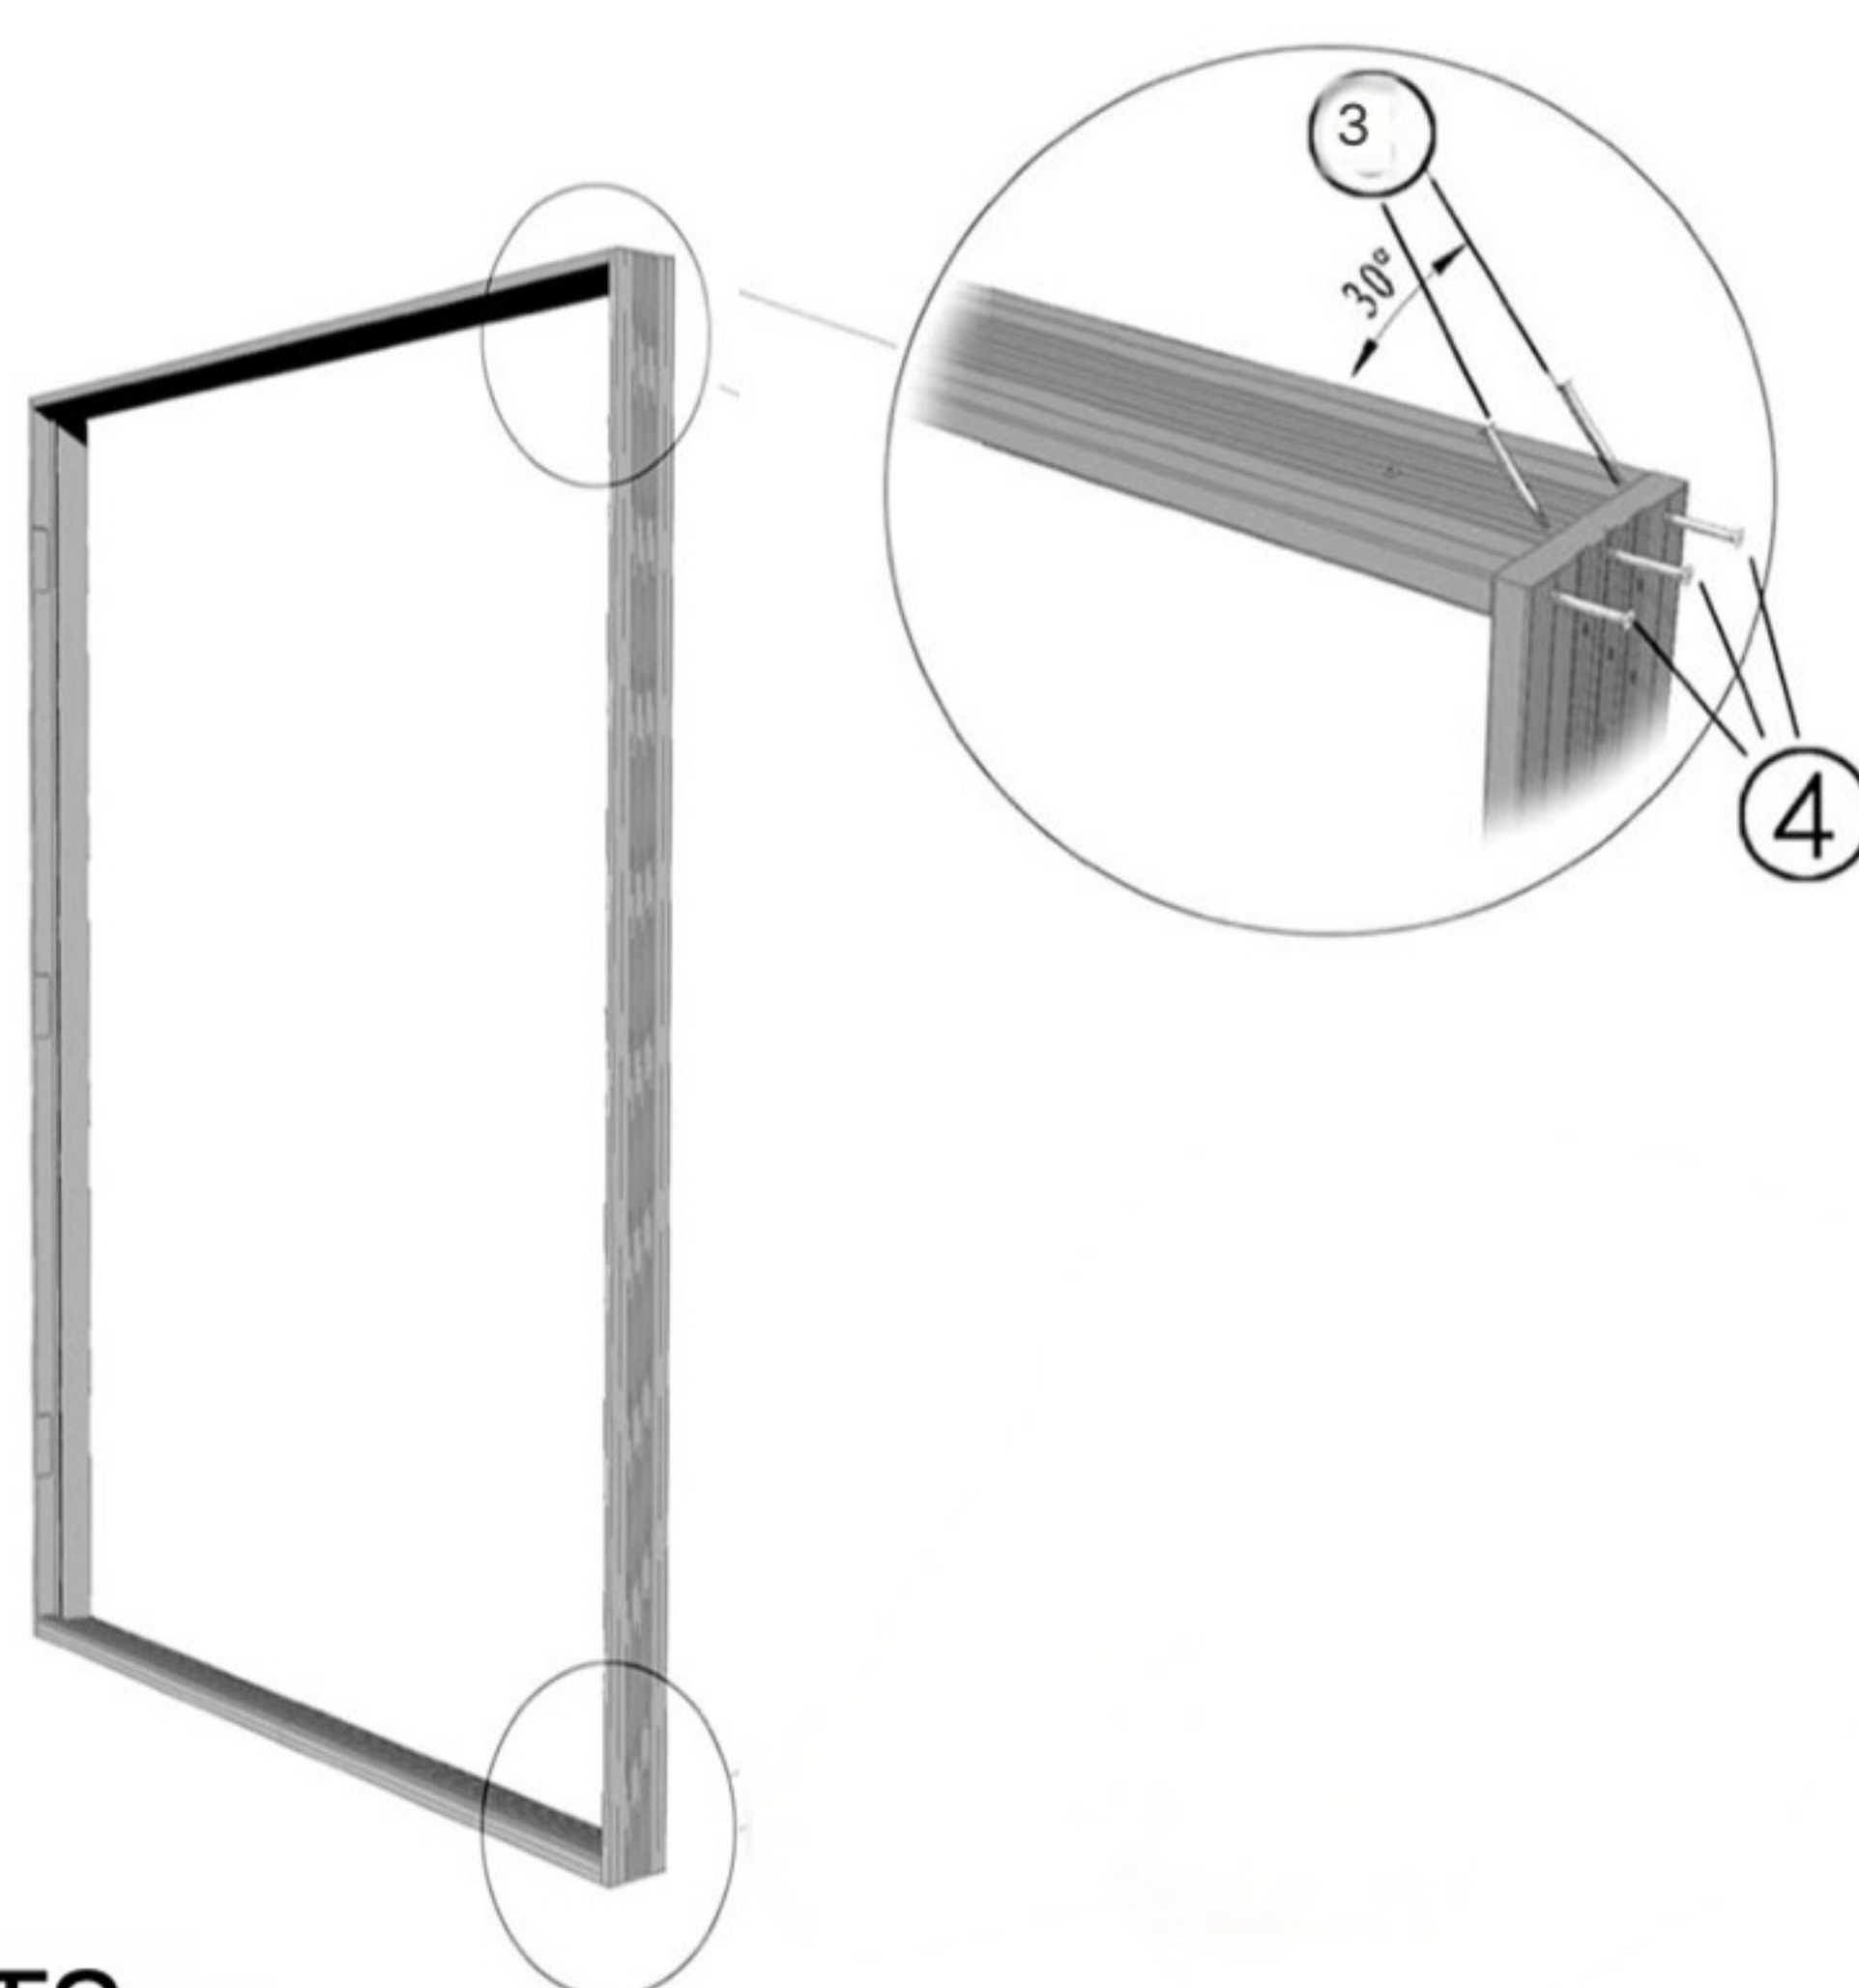

ASSEMBLY PARTS

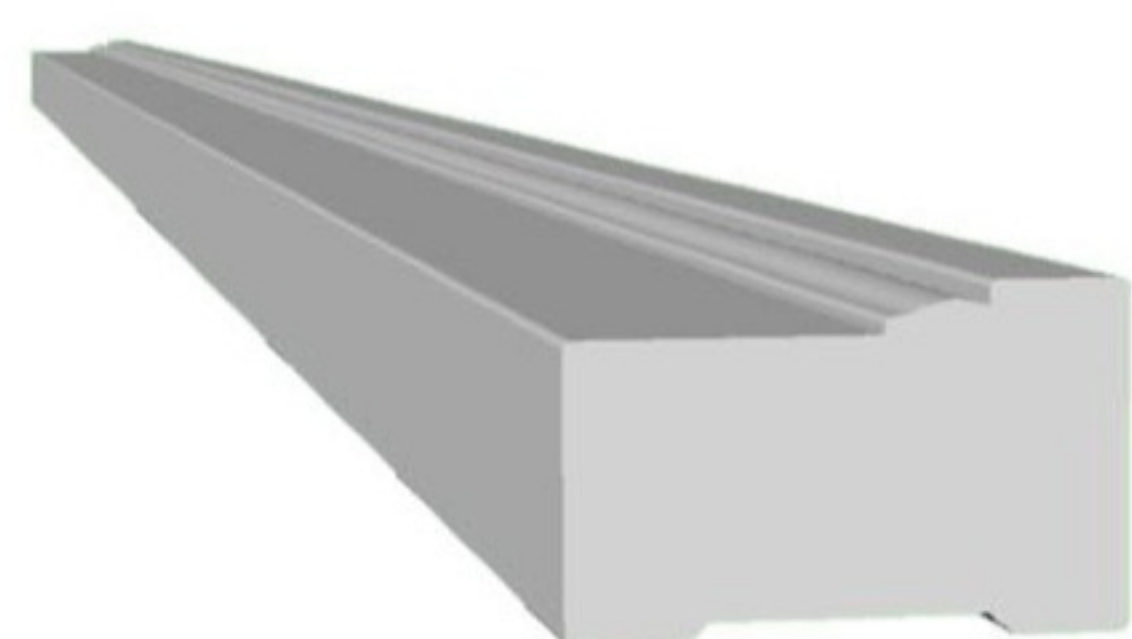


A. Brick Molding x3

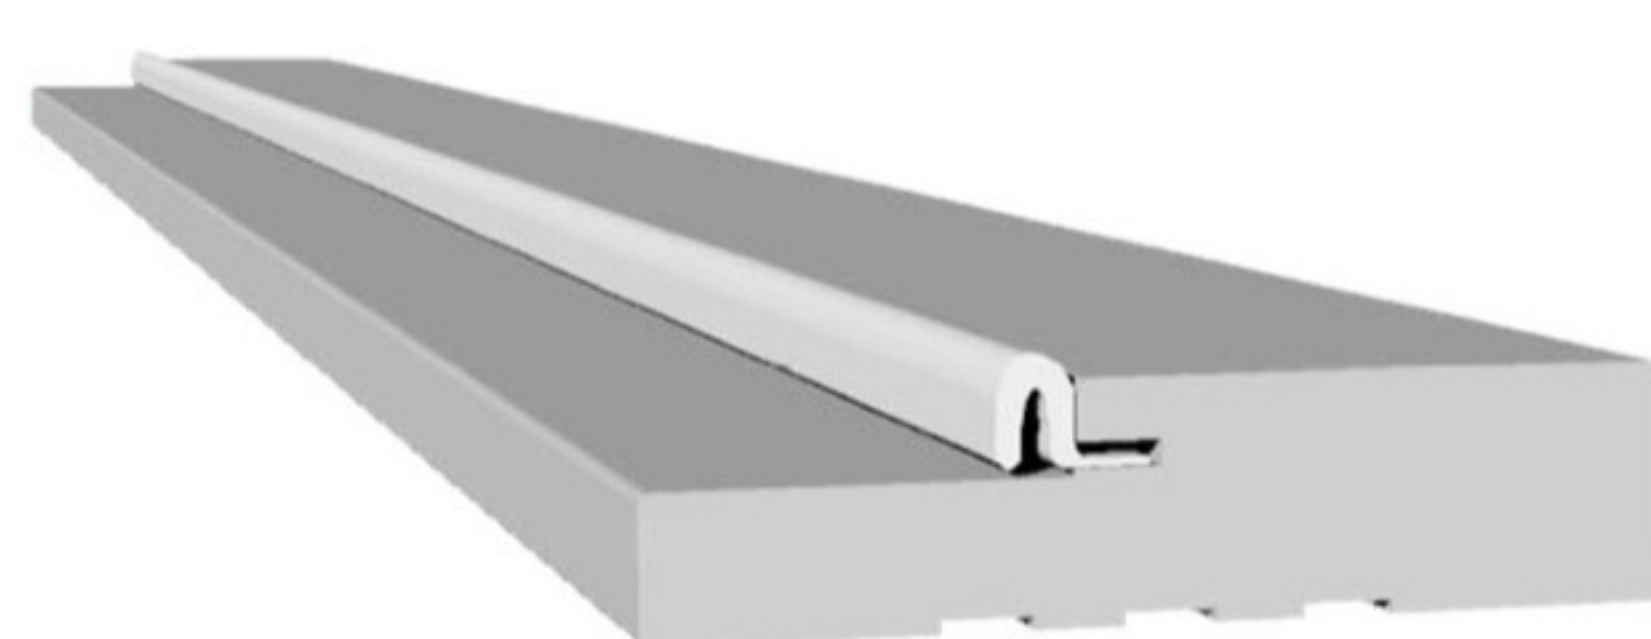

B. Door Jamb x3



C. Hinge x3

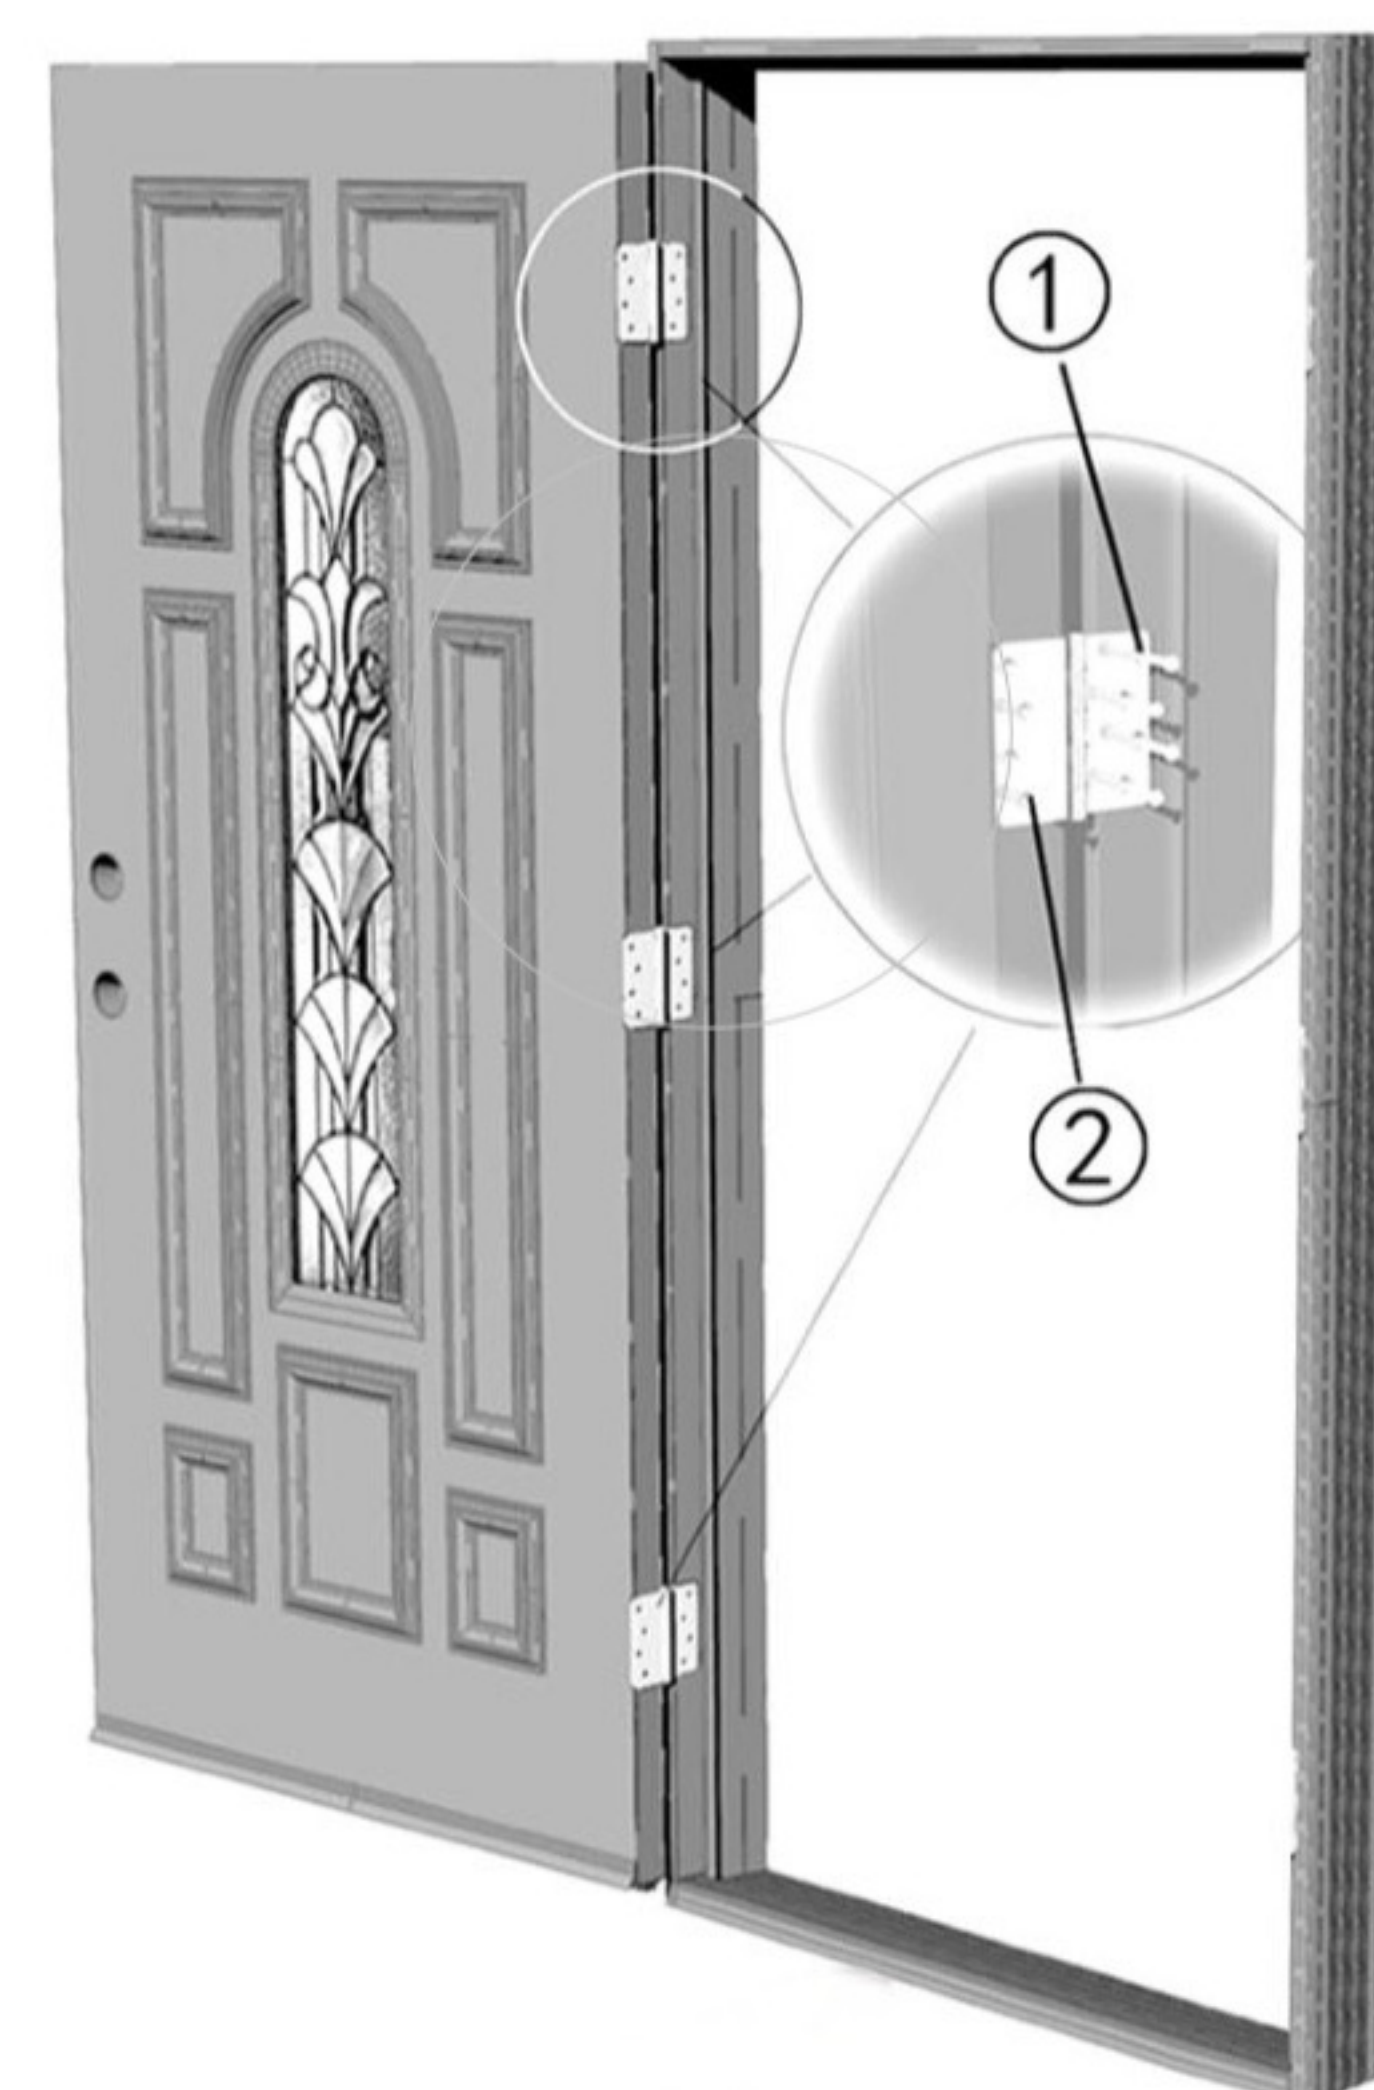

(Threshold / Door Sill and Weatherstrip Not Included)

Steps:

1. Assemble Frame:

Screw door Jamb head and legs together.
Screw Threshold to Jamb legs.

2. Screw Hinges to door.

3. Install door Jamb in opening according to installers chosen method.

4. Screw Hinges and door slab to door Jamb.
Adjust doors to close properly.

5. Install locksets per customer choosing.

6. Install Brick Mould.

7. Install Casing.